

# Systemwalker Service Quality Coordinator



## Reference Guide

Windows/Solaris/Linux

J2X1-7662-02ENZ0(00)  
January 2013

# Preface

---

## Purpose of this manual

This manual explains the different commands and messages used by Systemwalker Service Quality Coordinator.

## Target audience

This manual is intended for users who will use the Systemwalker Service Quality Coordinator Console window.

Readers of this manual should also have a general understanding of basic operating system and GUI operations as well as a working knowledge of communications protocols such as TCP/IP and SMTP.

## Organization of Systemwalker Service Quality Coordinator manuals

The Systemwalker Service Quality Coordinator manuals are organized as follows:

- Systemwalker Service Quality Coordinator Technical Guide  
Provides an overview of the functions of Systemwalker Service Quality Coordinator.
- Systemwalker Service Quality Coordinator Installation Guide  
Explains how to install and set up Systemwalker Service Quality Coordinator.
- Systemwalker Service Quality Coordinator User's Guide  
Explains how to use the functions of Systemwalker Service Quality Coordinator.
- Systemwalker Service Quality Coordinator User's Guide (Console Edition)  
Explains how to use those functions related to console windows.
- Systemwalker Service Quality Coordinator User's Guide (Dashboard Edition)  
Explains how to use dashboard function.
- Systemwalker Service Quality Coordinator Reference Guide  
Explains commands, data formats, messages and so on.
- Systemwalker Service Quality Coordinator Troubleshooting Guide  
Explains how to handle any problems that may occur.
- Systemwalker Service Quality Coordinator User's Guide (Website Management Functions Edition)  
Explains the Systemwalker Service Quality Coordinator functions that relate to analyzing Web usage and monitoring Web content tempering.
- Systemwalker Service Quality Coordinator User's Guide (Systemwalker User Management and Single Sign-On Edition)  
Explains how to install and use the Systemwalker User Management and Systemwalker Single Sign-On functions when Systemwalker Service Quality Coordinator is to be used.
- Systemwalker User's Guide - Systemwalker User Management and Single Sign-On  
Explains how to install the Systemwalker User Management function and the Systemwalker Single Sign-On function.
- Systemwalker Service Quality Coordinator Glossary  
This manual explains Systemwalker Service Quality Coordinator terminology.

## Positioning of this document

This manual is common to the Systemwalker Service Quality Coordinator products for Windows, Linux and Oracle Solaris:

- Systemwalker Service Quality Coordinator Enterprise Edition V15.0.1
- Systemwalker Service Quality Coordinator Standard Edition V15.0.1

## Abbreviations

- The term "Windows Server 2012" refers to the following products:
  - Microsoft(R) Windows Server(R) 2012 Foundation
  - Microsoft(R) Windows Server(R) 2012 Standard
  - Microsoft(R) Windows Server(R) 2012 Datacenter
- The term "Windows Server 2008" refers to the following products:
  - Microsoft(R) Windows Server(R) 2008 R2 Foundation
  - Microsoft(R) Windows Server(R) 2008 R2 Standard
  - Microsoft(R) Windows Server(R) 2008 R2 Enterprise
  - Microsoft(R) Windows Server(R) 2008 R2 Datacenter
  - Microsoft(R) Windows Server(R) 2008 Foundation
  - Microsoft(R) Windows Server(R) 2008 Standard
  - Microsoft(R) Windows Server(R) 2008 Enterprise
  - Microsoft(R) Windows Server(R) 2008 Datacenter
  - Microsoft(R) Windows Server(R) 2008 Standard without Hyper-V(TM)
  - Microsoft(R) Windows Server(R) 2008 Enterprise without Hyper-V(TM)
  - Microsoft(R) Windows Server(R) 2008 Datacenter without Hyper-V(TM)
  - Microsoft(R) Windows Server(R) 2008 Standard Server Core
  - Microsoft(R) Windows Server(R) 2008 Standard without Hyper-V(TM) Server Core
  - Microsoft(R) Windows Server(R) 2008 Enterprise Server Core
  - Microsoft(R) Windows Server(R) 2008 Enterprise without Hyper-V(TM) Server Core
  - Microsoft(R) Windows Server(R) 2008 Datacenter Server Core
  - Microsoft(R) Windows Server(R) 2008 Datacenter without Hyper-V(TM) Server Core
- The term "Windows Server 2003" refers to the following products:
  - Microsoft(R) Windows Server(R) 2003 R2, Standard Edition
  - Microsoft(R) Windows Server(R) 2003 R2, Enterprise Edition
  - Microsoft(R) Windows Server(R) 2003 R2, Datacenter Edition
  - Microsoft(R) Windows Server(R) 2003, Standard Edition
  - Microsoft(R) Windows Server(R) 2003, Enterprise Edition
  - Microsoft(R) Windows Server(R) 2003, Datacenter Edition
- The term "Windows 8" refers to the following products:
  - Windows(R) 8
  - Windows(R) 8 Pro
  - Windows(R) 8 Enterprise

- The term "Windows 7" refers to the following products:
  - Windows(R) 7 Home Premium
  - Windows(R) 7 Professional
  - Windows(R) 7 Enterprise
  - Windows(R) 7 Ultimate
- The term "Windows Vista" refers to the following products:
  - Windows Vista(R) Home Basic
  - Windows Vista(R) Home Premium
  - Windows Vista(R) Business
  - Windows Vista(R) Enterprise
  - Windows Vista(R) Ultimate
- The term "Windows XP" refers to the following products:
  - Microsoft(R) Windows(R) XP Home Edition
  - Microsoft(R) Windows(R) XP Professional Edition
- Windows Server 2003 and Windows Server 2008 are referred to as "Windows Server 2008 and earlier".
- Windows Server 2008 and Windows Server 2012 are referred to as "Windows Server 2008 and later".
- Windows XP, Windows Vista, and Windows 7 are referred to as "Windows 7 and earlier".
- Windows Vista, Windows 7 and Windows 8 are referred to as "Windows Vista and later".
- Windows Server 2008 and earlier and Windows 7 and earlier are referred to as "Windows Server 2008/Windows 7 and earlier".
- Windows Server 2008 and later and Windows Vista and later are referred to as "Windows Server 2008/Windows Vista and later".
- Microsoft(R) SQL Server(TM) is abbreviated as "SQL Server".
- Microsoft(R) Cluster Server is abbreviated as "MSCS".
- Oracle Solaris might be described as Solaris, Solaris Operating System, or Solaris OS.
- Oracle Solaris zone might be described as Solaris container.
- Oracle WebLogic Server is abbreviated as "WebLogic Server".
- Oracle Database is abbreviated as "Oracle".
- Systemwalker Centric Manager is abbreviated as "Centric Manager".
- Systemwalker Resource Coordinator is abbreviated as "Resource Coordinator".
- Interstage Application Server is abbreviated as "Interstage".
- Symfoware Server is abbreviated as "Symfoware".
- VMware(R) ESX(R) is abbreviated as "VMware ESX" or "ESX".
- VMware(R) ESXi(TM) is abbreviated as "VMware ESXi" or "ESXi".
- VMware(R) vCenter(TM) is abbreviated as "VMware vCenter" or "vCenter".
- VMware vSphere(R) is abbreviated as "VMware vSphere".
- Versions of Systemwalker Service Quality Coordinator that operate under Windows are referred to as "Windows versions".
- Versions of Systemwalker Service Quality Coordinator that operate under Solaris are referred to as "Solaris versions".

- Versions of Systemwalker Service Quality Coordinator that operate under Linux are referred to as "Linux versions".
- Solaris and Linux versions of Systemwalker Service Quality Coordinator are referred to collectively as "UNIX versions".
- The term "Agent" is used to refer to articles common to both Agent for Server and Agent for Business.

## Conventions used in this document

- Edition-specific information

This manual deals mainly with the Standard Edition and Enterprise Edition of Systemwalker Service Quality Coordinator. The following symbols appear in the title or text of an article to distinguish between the Standard Edition (standard specification) and the Enterprise Edition.

**EE**

This indicates that the article relates specifically to Systemwalker Service Quality Coordinator Enterprise Edition.

**SE**

This indicates that the article relates specifically to Systemwalker Service Quality Coordinator Standard Edition.

Also, Systemwalker Service Quality Coordinator Enterprise Edition referred to as "EE", and Systemwalker Service Quality Coordinator Standard Edition referred to as "SE".

- Information specific to Windows or UNIX versions

This document contains information common to both Windows versions and UNIX versions of Systemwalker Service Quality Coordinator. Information specific to only the Windows versions and information specific to only the UNIX versions are distinguished from common information by attaching the following symbols:

**[Windows]**

This indicates that the article relates specifically to Windows versions.

**[UNIX]**

This indicates that the article relates specifically to UNIX versions.

The symbols **[Solaris]**, **[Linux]**, **[AIX]**, and **[HP-UX]** are used to distinguish Solaris, Linux, AIX, and HP-UX versions of Systemwalker Service Quality Coordinator.

If notice should be paid, the information is distinguished from common information by attaching the following symbols:

**S**

This indicates that the article relates specifically to Solaris versions.

**L**

This indicates that the article relates specifically to Linux versions.

## Symbols

The symbols used with commands are explained below.

**[Entry example]**

[**PARAMETER**={ a | b | c | ... }]

**[Meaning of each symbol]**

Symbol	Meaning
[]	Items enclosed in square brackets are optional.
{ }	Select one of the items enclosed in braces ( { } ).
__	When all optional items enclosed in square brackets ( [ ] ) are omitted, the default value indicated by an underscore ( _ ) is used.
	Select one of the items separated by vertical bars.
...	The item immediately before the ellipsis (...) can be repeatedly specified.

## Export Restriction

If this document is to be exported or provided overseas, confirm the regulations of Foreign Exchange and Foreign Trade Control laws adhere to all legal requirements according to those laws.

## Trademarks

- Adobe, Adobe Reader, and Flash are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.
- Apache and Tomcat are trademarks or registered trademarks of The Apache Software Foundation.
- HP-UX is a registered trademark of the Hewlett-Packard Company.
- IBM, IBM logo, AIX, AIX 5L, HACMP, Power, and PowerHA are trademarks of International Business Machines Corporation in the United States and other countries.
- Intel and Itanium are trademarks or registered trademarks of Intel Corporation in the U.S. and other countries.
- Linux is a registered trademark of Linus Torvalds.
- Microsoft, Windows, Windows Server and the titles or names of other Microsoft products are trademarks or registered trademarks of Microsoft Corporation in the United States and other countries.  
All other trademarks are the property of their respective owners.
- Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.
- Red Hat is registered trademarks of Red Hat, Inc. in the U.S. and other countries.
- UNIX is a registered trademark of The Open Group in the United States and other countries.
- VMware, the VMware logo, Virtual SMP and VMotion are trademarks or registered trademarks of VMware, Inc. in the United States and other countries.
- Other company names and product names are trademarks or registered trademarks of respective companies.
- The company names, system names, product names and other proprietary names that appear in this document are not always accompanied by trademark symbols (TM or (R)).

This guide uses screenshots in accordance with Microsoft Corporation's guidelines.

## Acknowledgement

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)

January 2013

Copyright 2003-2013 FUJITSU LIMITED

# Contents

---

Chapter 1 Command Reference.....	1
1.1 Policy Commands.....	1
1.1.1 sqcRPolicy (Server Resource Information Collection Policy Creation Command).....	4
1.1.2 sqcAPolicy (Response / Operation Information Collection Policy Setup Command).....	9
1.1.3 sqcSetPolicy (Policy Application Command).....	12
1.1.4 sqcMdPolicy (Temporary Policy Change Command).....	21
1.1.5 sqcViewPolicy (Policy Definition Information Verification Command).....	23
1.1.6 sqcSendPolicy (Policy Definition Information Distribution Command).....	26
1.1.7 sqcCtrlPolicy (Remote Policy Operation Command).....	29
1.2 sqcEmSetup (Two-tier Manager Setup Command).....	33
1.3 sqcHmSetup (Manager Setup Command for Redundant Manager Operation).....	37
1.4 sqcHaSetup (Agent/Proxy Manager Setup Command for Redundant Manager Operation).....	40
1.5 Cluster Setup Commands.....	43
1.5.1 sqcsetupclp/sqcsetupcls(Cluster setup command).....	43
1.5.2 sqcunsetcl (Cluster Release Command).....	46
1.6 Agent for Agentless Monitoring Commands.....	47
1.6.1 sqcRemoteCheck (Agent for Agentless Monitoring Management Communication Confirmation Command).....	47
1.6.2 sqcAgentlessCleanUp (Agent for Agentless Monitoring Management Collection Script Deletion Command).....	50
1.7 PDB Commands.....	53
1.7.1 sqcPDBcout (CSV Output Command).....	53
1.7.2 sqcPDBcload (User Data Input Command).....	58
1.7.3 sqcPDBerase (Data Deletion Command).....	61
1.7.4 sqcPDBexport (Configuration Information Export Command).....	63
1.7.5 sqcSetPDBManage (PDB Retention Period Modification Command).....	65
1.7.6 sqcSetPDBStore (PDB File Location Change Command).....	68
1.8 Manager Setting Commands.....	71
1.8.1 sqcSetMgrInfo(for Agent/Proxy Manager).....	71
1.8.2 sqcSetMgrInfo(for Operation Management Client).....	73
1.9 Scheduled Report Operation Commands.....	74
1.9.1 sqcMakeReport (Scheduled Report Creation Command).....	74
1.9.2 sqcDeleteReport (Scheduled Report Deletion Command).....	78
1.10 Console Definition Commands.....	79
1.10.1 sqcSetupConsoleDefine (Console Definition Configuration Command).....	79
1.10.2 sqcGetXMLConfig (Configuration Information Collection Command).....	83
1.11 ServerView Resource Orchestrator Linkage Commands.....	86
1.11.1 sqcSetRorInfo (ServerView Resource Orchestrator Linkage Setup Command).....	86
1.11.2 sqcSetRorUpgrade(ServerView Resource Orchestrator Collection Items Change Command).....	88
1.12 sqcSetSELinux (SELinux Support Setup Command).....	92
1.13 sqcCheckAlertconfig(Threshold Monitoring Definition Check Command).....	94
1.14 genpwd (password encryption command).....	97
1.15 swSilentSetup(Silent Installation Command).....	99
1.16 sqcMigrationReports.bat(Registered Reports Migration Command).....	101
Chapter 2 Starting and Stopping Resident Processes.....	103
2.1 Manager.....	103
2.2 Proxy Manager.....	104
2.3 Agent.....	106
2.4 Enterprise Manager.....	107
2.5 Starting the thttpd Service/Daemon Automatically.....	109
Chapter 3 Resource Configuration Information(MiddlewareConf.xml).....	111
3.1 Storage Location.....	111
3.2 Editing MiddlewareConf.xml.....	111
Chapter 4 Data Formats.....	114



4.1 Summary Information.....	114
4.1.1 UserResponseMonitor.....	114
4.1.2 ServiceAvailMonitor.....	114
4.1.3 WebTrnMonitor.....	115
4.1.4 ServerMonitor.....	115
4.1.5 ZoneMonitor/ZoneStackMonitor/ZoneStackMonitor(All).....	116
4.1.6 Interstage(EJB)Monitor.....	117
4.1.7 Interstage(TD)Monitor.....	117
4.1.8 Interstage(CORBA)Monitor.....	118
4.1.9 Interstage(IJServer)Monitor.....	118
4.1.10 Interstage(IJServer Cluster)Monitor.....	119
4.1.11 TxnSyncMonitor.....	119
4.1.12 TxnAsyncMonitor.....	119
4.1.13 TxnOssJavaMonitor.....	119
4.1.14 WebLogicServerMonitor.....	119
4.1.15 MS-.NET_Monitor.....	120
4.1.16 SymfowareMonitor.....	120
4.1.17 OracleMonitor.....	120
4.1.18 MS-SQL_Monitor.....	121
4.1.19 OperationMgrMonitor.....	121
4.1.20 TcpNetworkMonitor.....	121
4.1.21 StorageMonitor.....	122
4.1.22 SAP Monitor.....	123
4.1.23 ROR(VMPool)Monitor.....	123
4.1.24 ROR(StoragePool)Monitor.....	123
4.1.25 ROR(NetworkPool)Monitor.....	124
4.1.26 ROR(ServerPool)Monitor.....	124
4.1.27 ROR(AddressPool)Monitor.....	124
4.1.28 VMware(Virtual)StackMonitor.....	124
4.1.29 VMware(Physical)Monitor.....	126
4.1.30 VMware(Cluster)Monitor.....	126
4.1.31 VMware(ResourcePool)Monitor.....	127
4.1.32 HyperV(Virtual)StackMonitor.....	127
4.1.33 HyperV(Physical)Monitor.....	128
4.1.34 KVM(Virtual)StackMonitor.....	128
4.1.35 Xen(Virtual)StackMonitor.....	129
4.1.36 ZoneMonitor.....	129
4.1.37 UserDataMonitor.....	130
4.2 Drilled-Down/Report Information.....	131
4.2.1 The ResponseCondition folder/End user response reports.....	131
4.2.2 The ServiceCondition folder/HTTP/DNS/SMTP/PORT service reports.....	134
4.2.3 The WebTrn folder/Web transaction reports.....	136
4.2.4 The Windows folder/Windows reports.....	137
4.2.5 The Solaris & Linux folder/UNIX reports.....	140
4.2.6 The Interstage folder/Interstage reports.....	151
4.2.7 The Interstage(TxnAnalysis)JavaEE & The Interstage(TxnAnalysis) folder/No data.....	164
4.2.8 The TxnAnalysis(Sync) folder/No data.....	166
4.2.9 The TxnAnalysis(Async) folder/No data.....	166
4.2.10 The TxnAnalysis(OssJava) folder/No data.....	166
4.2.11 The WebLogicServer folder/WebLogicServer reports.....	167
4.2.12 The MS-.NET folder/MS-.NET reports.....	170
4.2.13 The Symfoware folder/Symfoware reports.....	171
4.2.14 The Oracle folder/Oracle reports.....	178
4.2.15 The MS-SQL folder/MS-SQL reports.....	180
4.2.16 No data/CentricManager reports.....	182
4.2.17 The OperationMGR folder/OperationManager reports.....	183
4.2.18 No data/Systemwalker Network Manager reports.....	185

4.2.19 The TcpNetwork folder/TcpNetwork reports.....	188
4.2.20 The StorageResource folder/Storage reports.....	189
4.2.21 The Resource Orchestrator folder/Pool(Demand Prediction) reports.....	191
4.2.22 The SAP folder/SAP reports.....	192
4.2.23 The ECO folder/No data.....	198
4.2.24 The VMware folder/VMware reports.....	199
4.2.25 The Hyper-V folder/Hyper-V reports.....	219
4.2.26 The KVM folder/KVM reports.....	223
4.2.27 The Xen folder/Xen reports.....	225
4.2.28 The SolarisZone folder/Solaris Zone reports.....	226
4.2.29 The UserData folder/No data.....	228
4.2.30 No data/P2V simulation reports.....	230
4.3 Log Data (Troubleshooting) Information.....	235
4.3.1 Header formats other than WIN_PROCESS and UX_PROCESS.....	235
4.3.2 WIN_PROCESS header format.....	236
4.3.3 UX_PROCESS header format.....	236
4.4 Management Console Operation Log Information.....	237
4.4.1 Operation log file names.....	237
4.4.2 Operation log format.....	237
<b>Chapter 5 Messages.....</b>	<b>239</b>
5.1 Common Messages.....	240
5.2 Windows-specific Messages.....	292
5.3 UNIX-specific Messages.....	295
5.4 Error messages generated by FJSCir.....	297
5.5 Error messages generated by Multiple Uninstallation and Management (middleware) function.....	300

# Chapter 1 Command Reference

This chapter explains the commands provided by Systemwalker Service Quality Coordinator.

## 1.1 Policy Commands

Performance information can begin to be collected after Enterprise Managers, Managers, Proxy Managers and Agents have been installed and a collection policy has been created and applied.



When the following operation is done with the object server, re-creation of policy and collection of the configuration information on the Operation Management Client is required.

- When the Information Collection Policy is changed

EXAMPLE:

- Changing the collection template (template.dat)
- Changing the response and managed object configuration information (ServiceConf.xml)

- When the cooperate middleware is installed

EXAMPLE:

- Installing the Symfoware Server

- When the cooperate middleware is uninstalled

EXAMPLE:

- Uninstalling the Operation Manager

- When the cooperate middleware settings are changed

EXAMPLE:

- Changing the Interstage settings
- Changing the Symfoware Server settings
- Changing the Oracle settings
- Changing Centric Manager linkage settings

- When the hardware organization of the server is changed

EXAMPLE:

- Changing the single/multi processor of the Linux server

- When the environment of the OS is changed

EXAMPLE:

- Changing host name
- Changing sysat's version by applying Linux patch

- When the definition file is changed by changing IP address, user name, and/or password of the monitoring server for agents for Agentless Monitoring

EXAMPLE:

- Changing the connection account configuration file (remoteAccount.txt)
- Changing the remote monitoring configuration file (remoteAgent.txt)

- When the definition file is changed by changing IP address of the monitored object for ECO information  
EXAMPLE:

- Changing the configuration information file of SNMP agents (ecoAgentInfo.txt)
- Changing the ECO information collection definitions file (collectOID.txt)

## Point


- Broadly speaking, two types of information are collected:
  - Server resource information (information that can be collected by Enterprise Managers, Managers, Proxy Managers and Agents)
  - Response and operational information (information that can be collected by Managers and Proxy Managers)
- A collection policy must first be created and then applied.
- A policy that has been applied can be modified temporarily.  
Commands are provided for each of these operations.
- Information collection begins with the creation of a collection policy. Always create a collection policy before attempting to apply it.

Some of the policy commands explained in this manual run on a server and some run on an operation management client.


Execution environment	Command name	Use
Enterprise Manager/ Manager/Proxy Manager/Agent	1.1.1 sqcRPolicy (Server Resource Information Collection Policy Creation Command)	These commands are used for collecting performance information.
	1.1.2 sqcAPolicy (Response / Operation Information Collection Policy Setup Command)	
	1.1.3 sqcSetPolicy (Policy Application Command)	
	1.1.4 sqcMdPolicy (Temporary Policy Change Command)	This command temporarily changes (stops/starts) the collection operation.
Operation management client	1.1.5 sqcViewPolicy (Policy Definition Information Verification Command)	These commands are used when the policy distribution function is used.
	1.1.6 sqcSendPolicy (Policy Definition Information Distribution Command)	
	1.1.7 sqcCtrlPolicy (Remote Policy Operation Command)	

Refer to "Policy Distribution" in the *User's Guide* for details on the policy distribution function.

Creating and applying a policy on the server from which performance information is to be collected

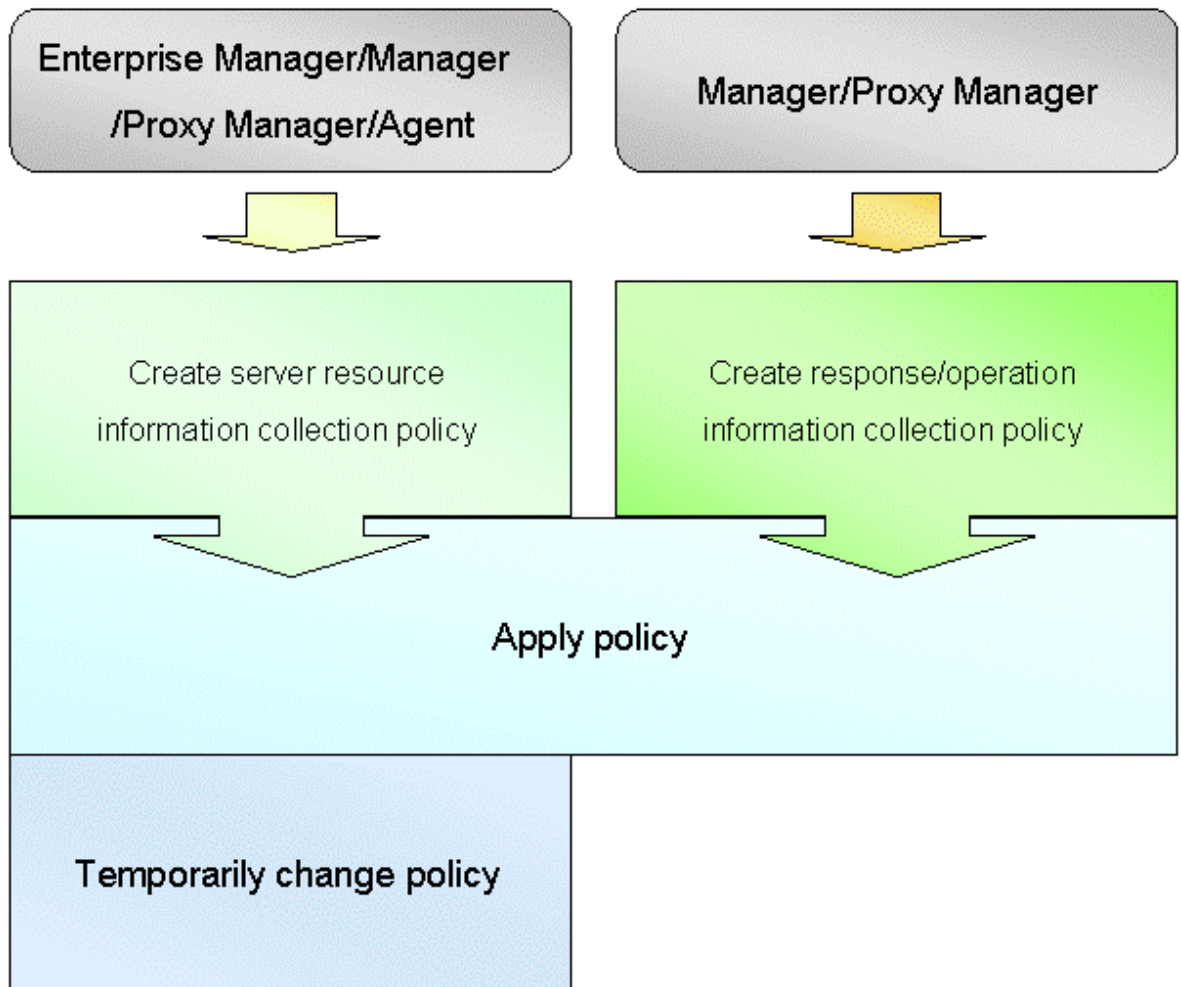

## Using the policy distribution function

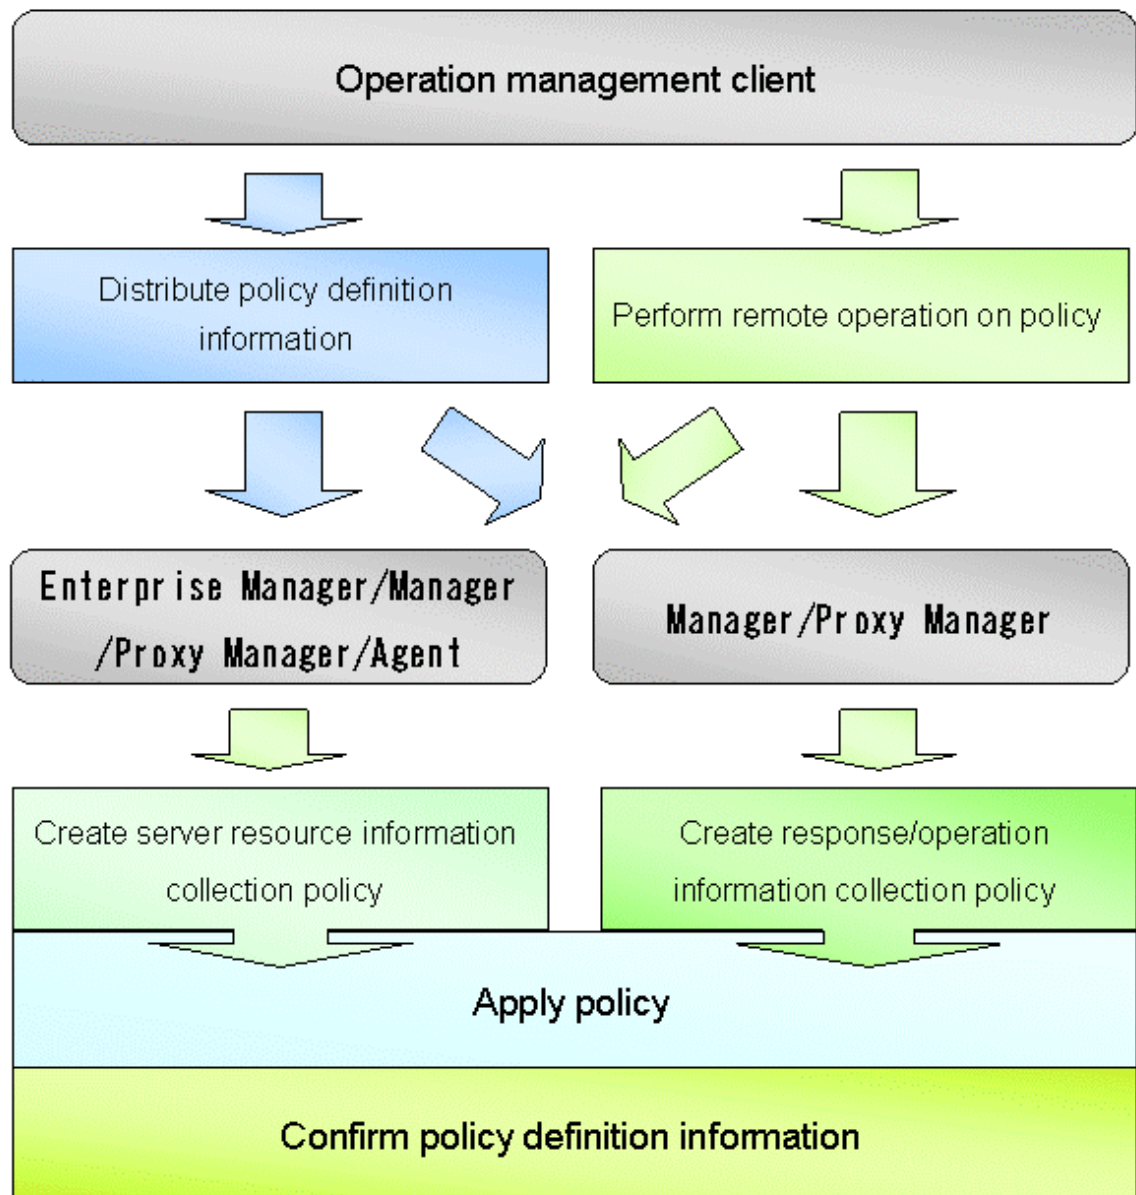

### Point

The policy distribution function is particularly effective when distributing the same definitions to multiple servers. Use this function according to the number and status of the managed servers.

## 1.1.1 sqcRPolicy (Server Resource Information Collection Policy Creation Command)

### Privileges required for execution

[Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

[UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

**Execution environment**

This command can be executed on Enterprise Manager, Manager, Proxy Manager, and Agent.

 **Note**

To detect each middleware product, it is necessary to ensure that performance information relating to each middleware product can be collected before executing this command.

Server resource information collection policies are created using the following two types of information.

- **Managed object configuration information (resource configuration information)**

This information indicates which resources within the server are being managed (server information/middleware information). It is detected automatically when the *sqcRPolicy* command is executed.

 **Note**

If the server is running as a cluster system, execute this command on both nodes. However, make sure that the middleware to be managed is running when the command is executed, and fail the cluster system over to the node where the policies are being created before executing the command. (Cluster system functionality is provided by the Enterprise Edition.)

- **Template**

This template defines the performance items for which information will be always collected. It is provided as the following file when this product is installed:

[Windows]

```
<Variable file storage directory>\control\template.dat
```

[UNIX]

```
/etc/opt/FJSVssqc/template.dat
```

[Windows]

For Windows systems, to collect disk-related performance information, the *diskperf* Windows command must be executed beforehand to enable information to be collected. This command is used as follows:

```
diskperf -y
```

Refer to the Windows help for details on the *diskperf* command. Before using this command, be sure to enable both physical drives and logical drives.

 **Point**

- The system must be restarted after settings are made using the *diskperf* command.
- The *diskperf* command must be executed before the Systemwalker SQC DCM service starts (before performance information starts being collected).

## Syntax

### [Windows]

```
<Installation directory>\bin\sqrPolicy.exe
```

### [UNIX]

```
/opt/FJSVssqc/bin/sqrPolicy.sh
```

## Function

This command creates server resource information collection policies, and, at the same time, checks the installation status of the middleware being managed.



Do not execute multiple sqrPolicy commands simultaneously.

The following middleware and associated resources can be managed:

### [Windows]

- Interstage Application Server  
Work Unit name, object name
- Interstage Service Integrator  
Work Unit name, object name
- Symfoware Sever  
RDB system name
- Systemwalker Centric Manager
- Systemwalker Operation Manager  
Subsystem number, project name, queue name
- Systemwalker Resource Coordinator(Storage)  
Storage, storage-device, Zone, LUNMapping, LUN\_R, LUN\_POfLUN\_R, LUN\_V, CM, Switch
- ETERNUS SF Storage Cruiser  
Storage,storage-device,Zone,LUNMapping,LUN\_R,LUN\_POfLUN\_R,LUN\_V,CM,Switch
- ServerView Resource Orchestrator  
Resource pool
- SAP NetWeaver
- Web transaction volume management  
Identifier for the log file to be analyzed

### [Solaris]

- Interstage Application Server  
Work Unit name, object name
- Interstage Business Application Server
- Interstage Application Framework Suite
- Interstage Service Integrator  
Group, queue, sequence



- Symfoware Sever  
RDB system name
- Systemwalker Centric Manager
- Systemwalker Operation Manager  
Sub system number, project name, queue name
- Systemwalker Resource Coordinator  
Network interface name
- Systemwalker Resource Coordinator (Storage)  
Storage,storage-device,Zone,LUNMapping,LUN\_R,LUN\_POfLUN\_R,LUN\_V,CM,Switch
- ETERNUS SF Storage Cruiser  
Storage,storage-device,Zone,LUNMapping,LUN\_R,LUN\_POfLUN\_R,LUN\_V,CM,Switch
- SAP NetWeaver
- Web transaction volume management  
Identifier for the log file to be analyzed

### **[Linux]**

- Interstage Application Server  
Work Unit name, object name
- Interstage Business Application Server
- Interstage Service Integrator  
Group, queue, sequence
- Symfoware Sever  
RDB system name
- Systemwalker Centric Manager
- Systemwalker Operation Manager  
Subsystem number, project name, queue name
- Systemwalker Resource Coordinator(Storage)  
Storage,storage-device,Zone,LUNMapping,LUN\_R,LUN\_POfLUN\_R,LUN\_V,CM,Switch,
- ETERNUS SF Storage Cruiser  
Storage,storage-device,Zone,LUNMapping,LUN\_R,LUN\_POfLUN\_R,LUN\_V,CM,Switch
- ServerView Resource Orchestrator  
Resource pool
- SAP NetWeaver
- Web transaction volume management  
Identifier for the log file to be analyzed

### **Options**

None.

### **Return values**

Normal termination: 0

Abnormal termination: 1

If this command terminates normally, the following message will be output:

```
(Success) : sqcRPolicy succeeded.
```

If this command terminates abnormally, the following message will be output:

```
(Error) : The file was not able to be created because of insufficient file access.
```

(File access error such as no available disk space or access privileges)

If managed middleware is detected on the server where RPolicy is executed, the following message will be output:

```
(Success) : Middleware product <middleware name> has been detected.  
The configuration definitions for the detected middleware have been added.
```

For <middleware name>, the name of the middleware product that has been detected will be displayed. Refer to "[Function](#)" for information about which middleware products can be managed.

## Usage example

### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin  
C:\Program Files\SystemwalkerSQC\bin>sqcRPolicy  
(Success) : Middleware product <InterstageApplicationServer> has been detected.  
The configuration definitions for the detected middleware have been added.  
(Success) : sqcRPolicy succeeded.  
C:\Program Files\SystemwalkerSQC\bin>
```

### [UNIX]

```
# cd /opt/FJSVssqc/bin/  
# ./sqcRPolicy.sh  
(Success) : Middleware product Interstage has been detected.  
The configuration definitions for the detected middleware have been added.  
(Success) : SqcRPolicy succeeded.  
#
```

## File

If this command is successful, the following file will be created:

### [Windows]

```
<Variable file storage directory>\control\MiddlewareConf.xml
```

### [UNIX]

```
/opt/FJSVssqc/control/MiddlewareConf.xml
```

After creating a server resource information collection policy, run the `sqcSetPolicy` command by referring to "1.1.3 [sqcSetPolicy \(Policy Application Command\)](#)".

### Point

.....

When the Server Resource Information Collection Policy Creation Command (`sqcRPolicy`) or `sqcCtrlPolicy.exe -e RP` command described in "1.1.7 [sqcCtrlPolicy \(Remote Policy Operation Command\)](#)" is executed, a file named "MiddlewareConf.xml" will be created. To remove one or more managed objects, edit the contents of `MiddlewareConf.xml` by referring to "Chapter 3 Resource Configuration Information([MiddlewareConf.xml](#))".

.....

## 1.1.2 `sqcAPolicy` (Response / Operation Information Collection Policy Setup Command)

---

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

This command can be executed on Enterprise Manager, Manager, and Proxy Manager.

Response and operation information collection policies are created using the following two types of information.

- Managed object configuration information (response and managed object configuration information)  
Response information relates to Browser Agents. Operational information relates to managed services such as HTTP and DNS.  
Make these definitions in the following configuration file:

#### [Windows]

```
<Variable file storage directory>\control\ServiceConf.xml
```

#### [UNIX]

```
/etc/opt/FJSVssqc/ServiceConf.xml
```

A sample file named "ServiceConf.sample" is located in the above directory. Make a backup copy of this file, then rename it as "ServiceConf.xml" and edit it to suit the environment.

Refer to "Response and Managed Object Configuration Information (ServiceConf.xml)" in the *User's Guide* for details on how to edit this configuration information file.

### Point

.....

To remove response information or service operational information that is currently being managed from the management target, delete entries from the managed object configuration information above, and recollect configuration information using the `sqcAPolicy` and `sqcSetPolicy` commands and the **Setting View**.

.....

### - **Template**

This template defines the performance items for which information will be always collected. It is provided as the following file when this product is installed:

#### [Windows]

```
<Variable file storage directory>\control\template.dat
```

#### [UNIX]

```
/opt/FJSVssqc/control/template.dat
```

## Syntax

#### [Windows]

```
<Installation directory>\bin\sqaPolicy.bat
```

#### [UNIX]

```
/opt/FJSVssqc/bin/sqaPolicy.sh
```

## Function

This command creates response and operation information collection policies by importing a predefined managed object configuration information file (response and managed object configuration information).



Do not execute multiple sqaPolicy commands simultaneously.

## Options

None.

## Return values

Normal termination:0

Abnormal termination:1

When this command is executed, it checks the operational information for the services being monitored, based on the contents of the managed object configuration information file, and displays the results. Then there is a prompt that provides an opportunity to correct any errors in the settings.

If the results displayed are correct, select "yes", otherwise select "no."

If this command is used incorrectly, it will terminate with error code 1.

If any other kind of error occurs, the command will terminate with error code -1.

If this command terminates normally, the following message will be output:

```
sqaPolicy succeeded.
```

If this command terminates abnormally, the following message will be output:

```
sqcAPolicy ServiceConf.xml error.
```

(There is an error in the content of ServiceConf.xml.)

## Usage example

### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin
C:\Program Files\SystemwalkerSQC\bin>sqcAPolicy
HTTP_1,23
DNS_1,24
PORT_1,1
Do you apply to these configurations? (yes/no)
yes
SqcAPolicy succeeded.
C:\Program Files\SystemwalkerSQC\bin>
```

### [UNIX]

```
# cd /opt/FJSVssqc/bin/
# ./sqcAPolicy.sh
HTTP_1,23
DNS_1,24
PORT_1,1
Do you apply to these configurations? (yes/no)
Yes
SqcAPolicy succeeded.
#
```



.....

The service name ("HTTP\_1" in this example) is followed by a comma and then a number. This number indicates the response time of the service being monitored. Any number other than -1 indicates that the service is operating correctly. If -1 is displayed, then either the service being monitored is not running, or there may be an error with the content of the managed object configuration information file. In this case, correct the file and execute the command again.

.....

## File

If this command is successful, the following files will be created according to the content of the managed object configuration information file.

### [Windows]

```
<Variable file storage directory>\control\WSLM.ini  
<Variable file storage directory>\control\HTTPPING.ini  
<Variable file storage directory>\control\DNSPING.ini  
<Variable file storage directory>\control\PORTPING.ini  
<Variable file storage directory>\control\SMTPPING.ini  
<Variable file storage directory>\control\AlertTarget.csv
```

#### [UNIX]

```
/opt/FJSVssqc/control/HTTPPING.ini  
/opt/FJSVssqc/control/DNSPING.ini  
/opt/FJSVssqc/control/PORTPING.ini  
/opt/FJSVssqc/control/SMTPPING.ini  
/opt/FJSVssqc/control/AlertTarget.csv
```

After creating a response/operation information collection policy, run the sqcSetPolicy command by referring to "[1.1.3 sqcSetPolicy \(Policy Application Command\)](#)" below.

## 1.1.3 sqcSetPolicy (Policy Application Command)

---

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

This command can be executed on Enterprise Manager, Manager, Proxy Manager, and Agent.

### Syntax

#### [Windows]

```
<Installation directory>\bin\sqcSetPolicy.exe [-h <host name>] [-p <IP address>]  
<Installation directory>\ bin\sqcSetPolicy.exe -v
```

#### [UNIX]

```
/opt/FJSVssqc/bin/sqcSetPolicy.sh [-h <host name>] [-p <IP address>]  
/opt/FJSVssqc/bin/sqcSetPolicy.sh -v
```

### Function

This command applies policies. The system name can be changed using the *-h* option. Also, when using dashboard, setting target IP address to be managed using the *-p* option.

## Note

Do not execute multiple `sqcSetPolicy` commands simultaneously.

## Point

From Systemwalker Service Quality Coordinator V13.3.0 onwards, the service or daemon no longer needs to be stopped before executing the Policy Application Command.

However, before using the "-h" option or "-p" option, service or daemon needs to be stopped. Execute the Policy Application Command after stopping the service or daemon by referring to "[Chapter 2 Starting and Stopping Resident Processes](#)".

If the services or daemons are running and performance data for various middleware is being collected when the Policy Application Command is executed, then the collection of this performance data will be temporarily suspended while policies are applied. Collection of this performance data will start again after the policies have been finished being applied.

## Options

`-h <host name>`

Use this option to specify a system name to change the managed system name.

Also, use this option to specify a system name for the managed system in the following kinds of cluster operations:

- Where the server is a Manager and information about resources within the server is to be collected.  
=> Specify the inheritance node.
- Where the server is an Agent in a cluster system that uses node name inheritance.  
=> Specify node name of each Agent.

If this option is omitted, host name which is set at the installation or the system name which was set at the last `-h` option will be used as system name.

Host name will not be updated automatically, so use this option to change the host name.

## Note

If this command is re-executed or an Agent is reinstalled where an operating environment for this product already exists and an Agent has already been registered, then use the same system name as was used before if the `-h` option is specified.

If the system name has to be changed for some reason, first delete the previous system name information from the PDB using the data deletion command explained in "[1.7.3 sqcPDBerase \(Data Deletion Command\)](#)". However, in this case, performance information that has already been collected cannot be displayed.

`-p <IP address>`

In the dashboard, management target is managed by using IP address.

When using the dashboard, be sure to specify IP address of the management target by using this option after installation. Specify the IP address of the connection Manager or Enterprise Manager which is available for connection.

Specify the inheritance node if the cluster system is being used.

If this option is omitted, IP address which was set at the last `-p` option will be used.

IP address will not be updated automatically, so use this option to change the IP address.

## Note

If this command is executed at the first time after the installation, and if this option is omitted, IP address will be set by the address which is automatically collected. However, if multiple IP addresses are existed, IP address which can

communicate with the connection Manager or Enterprise Manager might not be acquired. Be sure to specify IP address of the management target by using -p option.

-v

Use this option to display the system name and the IP address that are currently set.

## Return values

Normal termination: 0

Abnormal termination: 1

If this command terminates normally, the following message will be output:

```
(Success) : sqcSetPolicy succeeded.
```

If the managed middleware is detected on the server where the sqcSetPolicy command is executed, the following message will be output.

```
The policy has been set for the <middleware name>  
(Success) : sqcSetPolicy succeeded.
```

(The name of the detected middleware appears in <middleware name>)

If this command terminates abnormally, the following messages will be output:

```
(Error ) : sqcSetPolicy Parameter error.
```

(There is an error in specifying parameter)

```
(Error ) : The file was not able to be created because of insufficient file access rights  
or disk space.
```

(File access error such as no available disk space or access privileges)

```
(Error ) : There is an error in section [Section : XXX] of the template file sqcSetPolicy  
Template define error.
```

(There is an error with a template definition.)

```
(Error ) : DCM is running and so sqcSetPolicy can not be run.  
Please stop dcm and retry sqcSetPolicy.
```

(The Systemwalker SQC DCM service/dcmd process is running.)

## Note

If these error messages are displayed, the policies for the policy settings message displayed before the error messages will not take effect.



## Usage example

### [Windows]

```
For normal termination
C:\Program Files\SystemwalkerSQL\bin>sqlSetPolicy
This Computer Name is "XXXX"
The policy has been set for the <YYYY>
(Success) : sqlSetPolicy succeeded.

For abnormal termination
C:\Program Files\SystemwalkerSQL\bin>sqlSetPolicy
This Computer Name is "XXXX"
(Error) : There is an error in section [Section:ZZZZ] of the template file.

With -p option
C:\Program Files\SystemwalkerSQL\bin>sqlSetPolicy -p 192.0.2.10
This Computer Name is "XXXX"
This IP Address is "192.0.2.10"
The policy has been set for the <YYYY>
(Success) : sqlSetPolicy succeeded.

With -v option
C:\Program Files\SystemwalkerSQL\bin>sqlSetPolicy -v
This Computer Name is "XXXX"
This IP Address is "192.0.2.10"
(Success) : sqlSetPolicy succeeded.
```

### [UNIX]

```
For normal termination
# cd /opt/FJSVssqc/bin/
# ./sqlSetPolicy.sh
This Host Name is "XXXX"
The policy has been set for the <YYYY>
(Success) : sqlSetPolicy succeeded.

For abnormal termination
# cd /opt/FJSVssqc/bin/
# ./sqlSetPolicy.sh
This Host Name is "XXXX"
(Error) : There is an error in section [Section : ZZZZ] of the template file sqlSetPolicy Template define error.

With -p option
# cd /opt/FJSVssqc/bin/
# ./sqlSetPolicy.sh -p 192.0.2.10
This Host Name is "XXXX"
This IP Address is "192.0.2.10"
```

```
The policy has been set for the <YYYY>
(Success) : sqcSetPolicy succeeded.
With -v option
# cd /opt/FJSVssqc/bin/
# ./sqcSetPolicy.sh -v
This Host Name is "XXXX"
This IP Address is "192.0.2.10"
(Success) : sqcSetPolicy succeeded.
```

"XXXX" refers to the name specified with the *-h* option. If the *-h* option is omitted, the host name which is set at the installation or the system name which is set at the last *-h* option will be displayed.

"YYYY" indicates the middleware that has been detected. A separate line will be displayed for each middleware product that is detected.

"ZZZZ" indicates the section of the template file where the definition error was found.

**File**

If this command is successful, the following files will be created according to the content of the managed object configuration information file.

**[Windows]**

```
<Variable file storage directory>\control\ManagedConf_XXXX.xml
```

"XXXX" refers to the name specified with the *-h* option. If the *-h* option was omitted, the host name which is set at the installation or the system name which is set at the last *-h* option will be set.

**[UNIX]**

```
/etc/opt/FJSVssqc/ManagedConf_XXXX.xml
```

"XXXX" refers to the name specified with the *-h* option. If the *-h* option was omitted, the host name which is set at the installation or the system name which is set at the last *-h* option will be set.

 **Point**

Start the service/daemon after applying the policy. This configuration information must then be updated in the Console window.

Refer to "[Chapter 2 Starting and Stopping Resident Processes](#)" for details on how to start the service/daemon, and "Agents" in the *User's Guide (Console Edition)* for details on how to collect and apply configuration information.

**Definition error file**

- When this command is executed,
- Agent for Agentless Monitoring management
  - Eco information management
  - Virtual resource management

if the content of any one of definitions listed above is invalid, the error message is output to the following files.

**[Windows]**

<Variable file storage directory>\log\setpolicy\_error.log

**[UNIX]**

/var/opt/FJSVssqc/setpolicy\_error.log

The content of the message output to the file is as follows.

Error messages relate to the definitions of agent for Agentless Monitoring management and virtual resource management.

<b>Message</b>	<b>Action</b>
[Install-less Agent: %1, %2]	<p><b>[Meaning]</b></p> <p>There was an error in the definition of agent for Agentless Monitoring management.</p> <p>%1: The name of remote monitoring configuration file</p> <p>%2: The name of connection account configuration file</p> <p><b>[Action]</b></p> <p>Please confirm the content of the error message output starting from the next line, and correct the definition of the corresponding item.</p>
%1 is Empty (Section: %2)	<p><b>[Meaning]</b></p> <p>The value is not set to the item to which the setting is indispensable.</p> <p>%1: Item name of the error object</p> <p>%2: Section name of the setting of the observed server which contains errors</p> <p><b>[Action]</b></p> <p>Please confirm the method of defining the definition file, and set the value to the specified item.</p>
%1 is too long (Section: %2)	<p><b>[Meaning]</b></p> <p>The value set to the item is too long.</p> <p>%1: Item name of the error object</p> <p>%2: Section name of the setting of the observed server which contains errors</p> <p><b>[Action]</b></p> <p>Please confirm the number of characters that can be set to the item from the method of defining the definition file, and change the length of the specified item.</p>
%1 is wrong value (Section: %2)	<p><b>[Meaning]</b></p> <p>A correct value is not set to the item (selection item) from which the value that can be set is limited (selection).</p> <p>%1: Item name of the error object</p> <p>%2: Section name of the setting of the observed server which contains errors</p> <p><b>[Action]</b></p> <p>Please confirm the value that can be set to the item from the method of defining the definition file, and set the correct value to the specified item.</p>
%1 contains wrong letter (Section: %2)	<p><b>[Meaning]</b></p> <p>An invalid character is specified for the value of the item.</p> <p>%1: Item name of the error object</p>

Message	Action
	<p>%2: Section name of the setting of the observed server which contains errors</p> <p><b>[Action]</b></p> <p>Please confirm the characters which can be used for the value of the item, and change the value of the specified item.</p>
The combination of %1 and %2 is invalid (Section: %3)	<p><b>[Meaning]</b></p> <p>The method of the communication and the combination of the two items are not correct.</p> <p>%1: Item name number 1 of the error object</p> <p>%2: Item name number 2 of the error object</p> <p>%3: The section name which contains the error in the remote monitoring configuration file</p> <p><b>[Action]</b></p> <p>Please confirm the <i>User's Guide, "Management with an Agent for Agentless Monitoring"</i> and set the correct value of the communication method and the correct combination of the type of OS and virtual machine.</p>
Selected ACCOUNT is not exist (Section: %1)	<p><b>[Meaning]</b></p> <p>The ACCOUNT set on the remote monitoring configuration file is not set on the connection account configuration file.</p> <p>%1: Section name of the setting of the observed serve which contains errors.</p> <p><b>[Action]</b></p> <p>Please set ACCOUNT in the specified section to the connection account configuration file. Otherwise, use the account name which is already set on the ACCOUNT in the connection account configuration file.</p>
%1 has a already been used by other section (Section: %2)	<p><b>[Meaning]</b></p> <p>The same value is set to the item that should set a unique value to each section in two sections or more.</p> <p>* The value set to either HOSTNAME or DISPLAYNAME cannot be used any HOSTNAME and DISPLAYNAME of another section.</p> <p>%1: Item name of the error object</p> <p>%2: Section name of the setting of the observed server which contains errors</p> <p><b>[Action]</b></p> <p>Please confirm the value set to the item in the specified section is used in the other section, and change the setting not to use the same value.</p>

Error messages relate to the definitions of eco information management

Message	Action
[ECO: %1]	<p><b>[Meaning]</b></p> <p>There was an error in the definition of the eco information management.</p> <p>%1: Definition file name which contains errors</p> <p><b>[Action]</b></p> <p>Please confirm the content of the error message output starting from the next line, and correct the definition of the corresponding item.</p>
%1 is NULL (Line no:%2)	<p><b>[Meaning]</b></p>

Message	Action
	<p>The value is not set to the specified item in the configuration information file of the SNMP agent.</p> <p>%1: Item name</p> <p>%2: Line number</p> <p>* There are item names as follows.</p> <p>Hostname: IP Address/Host name</p> <p>SNMP version: version of the SNMP</p> <p>Community: Community name</p> <p>machinekind: Model name</p> <p>Username: User name</p> <p><b>[Action]</b></p> <p>Please set value to the item on the specified line.</p>
<p>%1 is used wrong character (Line no:%2)</p>	<p><b>[Meaning]</b></p> <p>An invalid character is specified for the value on the specified line in the configuration file of the SNMP agent.</p> <p>%1: Item name</p> <p>%2: Line number</p> <p>* There are item names as follows.</p> <p>Hostname: IP Address/Host name</p> <p>SNMP version: version of the SNMP</p> <p>Community: Community name</p> <p>machinekind: Model name</p> <p>Username: User name</p> <p><b>[Action]</b></p> <p>Please change the value of the "IP address/Host name" on the specified line.</p>
<p>%1 is too long (Line no:%2) MAX:%3</p>	<p><b>[Meaning]</b></p> <p>The value of the item on the specified line in the configuration file of the SNMP agent is too long.</p> <p>%1: Item name</p> <p>%2: Line number</p> <p>%3: Number of maximum characters</p> <p>* There are item names as follows.</p> <p>Hostname: IP Address/Host name</p> <p>SNMP version: version of the SNMP</p> <p>Community: Community name</p> <p>machinekind: Model name</p> <p>Username: User name</p> <p><b>[Action]</b></p> <p>Please set the value shorter than the number of maximum characters to the item on the specified line.</p>

Message	Action
SNMP version is wrong (Line no:% 1)	<p><b>[Meaning]</b></p> <p>An invalid string is used for the "SNMP version" on the specified line in the configuration information file of the SNMP agent.</p> <p>% 1: Line number</p> <p><b>[Action]</b></p> <p>Please change the value of the "SNMP version" on the specified line to character string that can be used (v1, v2, v2c, v3).</p>
Auth_type is wrong (Line no: % 1)	<p><b>[Meaning]</b></p> <p>An invalid string is used for the "attestation type" on the specified line in the configuration information file of the SNMP agent.</p> <p>% 1: Line number</p> <p><b>[Action]</b></p> <p>Please change the value of the "attestation type" on the specified line to character string that can be used (SHA, MD5).</p>
The same definition already exists. (Line no:% 1)	<p><b>[Meaning]</b></p> <p>The specified line has already been defined.</p> <p>% 1: Line number</p> <p><b>[Action]</b></p> <p>Please delete specified line.</p>
machinename is used wrong character(% 1) (lineno=% 2)	<p><b>[Meaning]</b></p> <p>An invalid character is used for "model name" on the specified line in the ECO information collection definitions file.</p> <p>% 1: Model name</p> <p>% 2: Line number</p> <p><b>[Action]</b></p> <p>Please change the value of the "model name" on the specified line.</p>
% 1 is used wrong character(% 2) (lineno=% 3)	<p><b>[Meaning]</b></p> <p>An invalid character is used for the definition on the specified line in the ECO information collection definitions file.</p> <p>% 1: Definition label</p> <p>% 2: Model name</p> <p>% 3: Line number</p> <p><b>[Action]</b></p> <p>Please change the definition on the specified line.</p>
mibfilename is used wrong filename (not end of filename ".txt") (% 1) (lineno=% 2)	<p><b>[Meaning]</b></p> <p>There is no ".txt" at the end of the definition on the specified line in the ECO information collection definition file.</p> <p>% 1: String defined in the mibfilename</p> <p>% 2: Line number</p> <p><b>[Action]</b></p> <p>Please change the definition on the specified line.</p>

Message	Action
machine-kind is not defined.ignored line[% 1]	<p><b>[Meaning]</b></p> <p>Because the corresponding model name is not exist in the ECO information collection definitions file, or the file specified in the mibfilename is not exist, the definition of the specified line in the configuration information file of the SNMP agent is not applied.</p> <p>% 1: Line number</p> <p><b>[Action]</b></p> <p>Please change the definition on the specified line.</p>

### 1.1.4 sqcMdPolicy (Temporary Policy Change Command)

Policies can be changed temporarily after they have been applied and started operating (while collection is running). Specifically, once information collection policies for the following middleware products have been created and applied, collection can be stopped (by specifying "off") and started (by specifying "on").

- Symfoware Server
- Oracle Database Server
- Operation Manager
- Server Performance



Do not execute multiple sqcMdPolicy command simultaneously.

#### Privileges required for execution

##### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

##### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.



Use temporary policy changes to control information collection behavior according to the operation mode of jobs or cluster systems.

#### Execution environment

This command can be executed on Enterprise Manager, Manager, Proxy Manager and Agent.

#### Syntax

##### [Windows]

```
<Installation directory>\bin\sqcMdPolicy.exe on|off|stat -c Type [ -i instance-name ]
```

##### [UNIX]

```
/opt/FJSVssqc/bin/sqcMdPolicy.sh on|off|stat -c Type [ -i instance-name ]
```

## Function

This command temporarily changes policies. Specify the management target with the `-c` option and the instance name with the `-i` option.

## Options

`on|off|stat`

Specify either of the following types of changes:

- `on`: Enables the target policy
- `off`: Disables the target policy
- `stat`: Display the policy status

If "on" or "sample" is displayed in the "Execute" column of the displayed results: Policy status is enabled.

If "off" is displayed in the "Execute" column of the displayed results: Policy status is disabled.

### `-c` Type

Specify one of the following managed objects:

- `sym` : Symfoware Server
- `ora` : Oracle Database Server
- `jla`: Operation Manager
- `reg`: Server performance (Windows only)
- `sar`: Server performance (UNIX only)

### `-i` instance-name (Can only be specified in the case of a database server)

This option specifies an instance name for the managed object specified by the `-c` option. If this option is omitted, all instances of the managed object will be targeted.

- When `sym` is specified: RDB system name
- When `ora` is specified: Instance name



.....  
If the RDB system does not have a name, specify "`-i @default`".

- `ora`: Oracle instance name (SID)
- .....

## Return values

Normal termination: 0

Abnormal termination:>0

1. A parameter has been specified incorrectly.
2. The memory required for processing could not be allocated.
3. There is no policy to be changed.



4. An internal error has occurred.
5. An error has occurred with file access.

## Usage example

[Windows]

```
C:\Program Files\SystemwalkerSQL\bin>sqcMdPolicy on -c sym -i systemwalker
```

[UNIX]

```
# cd /opt/FJSVssqc/bin/  
# ./sqcMdPolicy.sh off -c ora -i orcl
```



If an operation change is performed using the temporary change command while an Enterprise Manager, Manager, Proxy Manager or Agent is running, the command must be executed again later to return to the original status.

## 1.1.5 sqcViewPolicy (Policy Definition Information Verification Command)

### Privileges required for execution

The privileges of a user belonging to the "Administrators" group are required to execute this command.



To execute this command under Windows Server 2008/Windows Vista and later, execute with the administrator privilege.

#### For Windows Server 2012/Windows 8

Right-click the **Start** menu (located at the bottom-left corner of the Desktop) and select **Command Prompt (Admin)**. Run the command from the Command Prompt.

#### For Windows Server 2008/Windows 7/Windows Vista

From the **Start** menu, select **All Programs - Accessories**, then right-click **Command Prompt**, and select **Run as administrator**. Run the command from the Command Prompt.

### Execution environment

This command can be executed on an operation management client.

### Format

```
<Operation management client installation directory>\bin\sqcViewPolicy.exe [ -l [ as | ab | mg | pm | em ] ]
```

```
<Operation management client installation directory >\bin\sqcViewPolicy.exe -c
```

### Function

The policy definition information confirmation command confirms whether the server of the system name that distributes the policy the list display and the distribution ahead can distribute the policy.



Do not execute multiple sqcViewPolicy command simultaneously.

## Options

### -l Parameter

Lists the system names of the installation type specified by parameter that are targeted for policy distribution.

Note: If parameter is omitted, policies will be distributed to all the systems.

### -c

Checks if the distribution destination servers are ready to receive policies.

## Parameters

The following parameters specify the abbreviation of each installation type.

The following shows the correspondence between the abbreviations and installation types.

as: Agent for Server

ab: Agent for Business

mg: Manager

pm: Proxy Manager

em: Enterprise Manager

## Return values

0: Normal termination

1: Parameter error

2: Server processing error

3: Communication error

10: Other error

## Example 1

To display all servers that will be targeted by the policy distribution function:

```
C:\Program Files\SystemwalkerSQC-C\bin\sqcViewPolicy.exe -l
```

## Example 2

To display a list of Agents for Server that will be targeted by the policy distribution function:

```
C:\Program Files\SystemwalkerSQC-C\bin\sqcViewPolicy.exe -l as
```

## Example 3

To display a list of Agents for Server that will be targeted by the policy distribution function:

C:\Program Files\SystemwalkerSQC-C\bin\sqcViewPolicy.exe -o

## Execution results/Output format

### Normal termination

A normal termination message together with the following information will be sent to standard output:

#### - For sqcViewPolicy.exe -l

```
Server name, installation type, version, edition
Server name, installation type, version, edition
:
(Success) : sqcViewPolicy succeeded.,000
```

Server list output format (CSV)

Item	Content	Remarks (output format, etc.)
Server name	Name of server	
Installation type	Installation type	EM/MG/PM/AB/AS
Version	Version information	15.0.1
Edition	Edition information	SE/EE

#### - For sqcViewPolicy.exe -c

```
{ OK | NG } : { alive | noresp | refuse },systemname,{ Installation type },{ Version },{ Edition },{ IP : port }
:
(Success) : sqcViewPolicy succeeded.,000
```

Refer to the following for the action for NG.

#### - For NG:noresp

It is not possible to connect it with the port of Internet Protocol address at the connection destination.

Cause	Action method
Server on the <b>Agent</b> side or <b>Systemwalker SQC thttpd service/thttpd process</b> on the <b>Agent</b> side doesn't start.	Confirm whether the server and Systemwalker SQC thttpd service/thttpd process start, and start.
It is not <b>management client</b> accessible from <b>Agent</b> .	There is a possibility to be generated when two or more network interfaces exist in the server that installs Agent. Confirm Internet Protocol address that can be connected from the operation management client with <b>Agent</b> , and define Internet Protocol address that can be connected with the agentlist.cfg file.
Packet is not accessible in the firewall.	Confirm the setting of the firewall.

- For NG:refuse  
Though it connected with the port of Internet Protocol address at the connection destination when a correct response doesn't return.

Cause	Action method
A correct response doesn't return though it connected with the port of Internet Protocol address at the connection destination.	There is a possibility that the mistake is found in the setting of Systemwalker SQC thttpd service/thttpd process. Please confirm whether the Agent side is correctly set up.

### Abnormal termination

1. An error message will be sent to standard error output:

(Error): Message, error number

Error numbers and corresponding error messages

Error number	Message	Content
010	Parameter error. (Error detail code)	Parameter specification error
020	Server access error.(Error detail code)	Server processing error
030	Aborted connection error.(Error detail code)	Communication error
100	System error.	Other error

2. Correcting errors

Perform the corrective measure that is appropriate for the situation where the error occurred.

Error number	Content	Corrective measure
010	Parameter error	Correct the parameter and re-execute the command.
020	Server access error	Check the connection with the Manager and re-execute the command.
030	Communication error	Check the connection with the Manager and re-execute the command.
100	System error	Collect maintenance information, and contact a Fujitsu SE.

## 1.1.6 sqcSendPolicy (Policy Definition Information Distribution Command)

### Privileges required for execution

The privileges of a user belonging to the "Administrators" group are required to execute this command.



To execute this command under Windows Server 2008/Windows Vista and alater, execute with the administrator privilege.

#### For Windows Server 2012/Windows 8

Right-click the **Start** menu (located at the bottom-left corner of the Desktop) and select **Command Prompt (Admin)**. Run the command from the Command Prompt.

#### For Windows Server 2008/Windows 7/Windows Vista

From the **Start** menu, select **All Programs - Accessories**, then right-click **Command Prompt**, and select **Run as administrator**. Run the command from the Command Prompt.

---

## Execution environment

This command can be executed on an operation management client

## Format

<installation directory>\bin \sqcSendPolicy.exe	-g <policy distribution group name>
	-g <policy distribution group name> [-s <server name>,...]

## Function

This command distributes policy definition information to a specified server.



Do not execute multiple sqcSendPolicy command simultaneously.

---

## Options

**-g <policy distribution group name>**

Specify the name of the policy distribution group.

The policy definition information file created in the policy distribution group folder specified by *-g* will be distributed to the server defined by the policy distribution definition file (Distribute.ini).

**-s <server name>**

Specifies the name of the server to which a policy is to be distributed.

If the *-s* option is specified, the policy distribution definition file (Distribute.ini) of the policy distribution group specified by the *-g* option will be disabled and all the stored policy definition information files will be distributed to the specified server.

If the *-s* option is specified, only one policy distribution group will be specified by the *-g* option.

## Example 1

Distribution is performed using the following definition:

[Policy distribution group]

USER\_DEFINE\_FOLDER1

[The destination servers defined by the policy distribution definition file (Distribute.ini)]

wasabi1,wasabi2

[Policy definition information file]

Threshold monitoring definition

```
C:\Program Files\SystemwalkerSQC-C\bin\sqcSendPolicy.exe -g USER_DEFINE_FOLDER1
```

## Explanation 1

When USER\_DEFINE\_FOLDER1 is specified with *-g*, the policy definition information file (threshold monitoring definition) will be distributed to the destination servers (wasabi1, wasabi2) defined by the policy distribution definition file (Distribute.ini).

## Example 2

Distribution is performed using the following definition:

[Policy distribution group]

USER\_DEFINE\_FOLDER

[The destination servers defined by the policy distribution definition file (Distribute.ini)]

wasabi1,wasabi2

[Policy definition information file]

Threshold monitoring definition

```
C:\Program Files\SystemwalkerSQL-C\bin\sqcSendPolicy -g USER_DEFINE_FOLDER -s wasabi3,wasabi4
```

## Explanation 2

If wasabi3 and wasabi4 are specified with *-s*, the destination servers wasabi1 and wasabi2 defined by the policy distribution definition file (Distribute.ini) will be disabled and the policy definition information file (threshold monitoring definition) will be distributed to wasabi3 and wasabi4.

## Execution results/Output format

### Normal termination

1. A normal completion message together with the distribution destination server and distribution definition information will be sent to standard output.

```
(Success) : 000,sqcSendPolicy succeeded., error number,server name,time,definition file  
:
```

### Execution example

Remote policy operation (distribution) is performed using the following definition:

[Distribution destination servers]

wasabi1,wasabi2

[Policy definition information file]

Threshold value

```
(Success) : sqcSendPolicy succeeded.,000,wasabi1,2007-12-25 00:00,alertconfig.txt  
(Success) : sqcSendPolicy succeeded.,000,wasabi2,2007-12-25 00:00,alertconfig.txt
```

### Abnormal termination

1. An error message will be sent to standard error output:

```
(Error) : error message, error number, server name, time, definition file
```

Error numbers and corresponding error messages

Error number	Message	Content
010	Parameter error. (Error detail code)	Parameter specification error
011	Not found file	There are no files that can be distributed
020	Server access error. (Error detail code)	Server processing error
030	Aborted connection error. (Error detail code)	Communication error
100	System error. (Error detail code)	Other error

#### Execution example

Remote policy operation is performed using the following definition:

[Distribution destination servers]

wasabi1,wasabi2

[Policy definition information file]

Threshold value

[Sample error]

When a communication error occurred during distribution to wasabi1

(Error) : abort connection error.(????),030,wasabi1,2007-12-25 00:00,alertconfig.txt

(Success) : sqcSendPolicy succeeded.,000,wasabi2,2007-12-25 00:00,alertconfig.txt

Note: ??? indicates the detailed code.

## 2. Correcting errors

Perform the corrective measure that is appropriate for the situation where the error occurred.

Error number	Content	Corrective measure
010	Parameter error	Correct the parameter and re-execute the command.
011	There are no files that can be distributed	Check that the file corresponding to the type of destination server is registered with the policy distribution group folder.
020	Server processing error	Check the connection with the Manager and the destination server and then re-execute the command.
030	Communication error	Check the connection with the Manager and the destination server and then re-execute the command.
100	System error	Collect maintenance information, and contact a Fujitsu SE.

### 1.1.7 sqcCtrlPolicy (Remote Policy Operation Command)

Policies can be created and applied to distribution destination servers remotely from the operation management client. Use the sqcCtrlPolicy command (Policy Remote Operation Command) to create and apply policies. Explanation of the sqcCtrlPolicy (Remote Policy Operation Command) is as follows.

#### Privileges required for execution

The privileges of a user belonging to the "Administrators" group are required to execute this command.

## Note

To execute this command under Windows Server 2008/Windows Vista and later, execute with the administrator privilege.

### For Windows Server 2012/Windows 8

Right-click the **Start** menu (located at the bottom-left corner of the Desktop) and select **Command Prompt (Admin)**. Run the command from the Command Prompt.

### For Windows Server 2008/Windows 7/Windows Vista

From the **Start** menu, select **All Programs - Accessories**, then right-click **Command Prompt**, and select **Run as administrator**. Run the command from the Command Prompt.

## Execution environment

This command can be executed on an operation management client

## Format

<code>&lt;operation management client installation directory&gt;\bin \sqcCtrlPolicy.exe</code>	<code>-e &lt; operation command type&gt; {-g &lt;policy distribution group&gt;,...   -s &lt;Server name&gt;,... }</code>
--	--

## Function

- Policies can be created and applied to distribution destination servers remotely from the operation management client.  
Creating a collection policy (sqcRPolicy: Server resource information collection policy)
- Creating a collection policy (sqcAPolicy: Response/operation information collection policy)
- Applying a collection policy (sqcSetPolicy)

## Note

Do not execute multiple sqcCtrlPolicy command simultaneously.

## Point

From Systemwalker Service Quality Coordinator V13.3.0 onwards, it is no longer necessary to stop the service or daemon before running the Policy Application Command.

However, if the services or daemons are running and performance data for various middleware is being collected when the Policy Application Command is executed, then the collection of this performance data will be temporarily suspended while policies are applied. Collection of this performance data will start again after the policies have been finished being applied.

## Options

`-e <operation command type>`

Specifies the type of command to be operated remotely.

- AP: Collection Policy Creation Command (sqcAPolicy: Response/operation information collection policy)
- RP: Collection Policy Creation Command (sqcRPolicy: Server resource information collection policy)
- SP: Collection Policy Application Command (sqcSetPolicy)

`-g <Policy distribution group>`

Specifies the name of the policy distribution group folder.



-s <server name>

Specifies the server where remote operation will take place.

## Return values

0: Normal termination

1: Parameter error

2: Server processing error

3: Communication error

10: Other error

Refer to the error messages for error details.

If more than one error occurs, the maximum return value will be returned.

For example, if a server processing error occurs on Remote Execution Server A and another error occurs on Remote Execution Server B, 10 will be the value that is returned.

## Example

Remote policy operation is performed using the following definition:

[Server]

wasabi

[Command]

Collection Policy Creation Command (sqcRPolicy)

```
C:\Program Files\SystemwalkerSQ-C\bin\sqcCtrlPolicy.exe -e RP -s wasabi
```

## Execution results/Output format

### Normal termination

1. A normal completion message is output to standard output.

```
(Success) : sqcCtrlPolicy succeeded.,000, Server name, time.  
-- Name of remotely executed command Command Log Start ----  
Command execution result  
-- Name of remotely executed command Command Log End ----
```

### Execution example

Remote policy operation is performed using the following definition:

[Server]

wasabi1, wasabi2

[Command]

Collection Policy Creation Command (sqcRPolicy)

```
(Success) : sqcCtrlPolicy succeeded.,000,wasabi1,2007-12-25 00:00:00  
-- sqcRPolicy Command Log Start ----
```

```
(Success) : Middleware product <Interstage Application Server> has been detected.
The configuration definitions for the detected middleware has been added.
(Success) : sqcRPolicy succeeded.
-- sqcRPolicy Command Log End ----

(Success) : sqcCtrlPolicy succeeded.,000,wasabi2,2007-12-25 00:00:00
-- sqcRPolicy Command Log Start ----

(Success) : Middleware product <Interstage Application Server> has been detected.
The configuration definitions for the detected middleware has been added.
(Success) : sqcRPolicy succeeded.
-- sqcRPolicy Command Log End ----
```

**Abnormal termination**

- 1. An error message will be sent to standard error output:

```
(Error) : message, error number, server name, time
-- Name of remotely executed command Command Log Start ----
Command execution result
-- Name of remotely executed command Command Log End ----
```

Error numbers and corresponding error messages

Error number	Message	Content
010	Parameter error. ( Error detail code)	Parameter specification error
020	Server access error. (Error detail code)	Server processing error
030	Aborted connection error. (Error detail code)	Communication error
100	System error. ( Error detail code)	Other error

**Execution example**

Remote policy operation is performed using the following definition:

[Server]

wasabi1

[Command]

Collection Policy Application Command (sqcSetPolicy)

[Sample error]

File manipulation failure

```
(Error) : system error.(???) ,100, wasabi1,2007-12-25 00:00:00
-- sqcSetPolicy Command Log Start ----

(Error) : The file was not able to be created because of insufficient file access rights or disk space.
-- sqcSetPolicy Command Log End ----
```

Note: ??? indicates the detailed code.

## 2. Correcting errors

Perform the corrective measure that is appropriate for the situation where the error occurred.

Error number	Content	Corrective measure
010	Parameter error	Correct the parameter and re-execute the command.
020	Server processing error	Check the connection with the Manager and the destination server and then re-execute the command.
030	Communication error	Check the connection with the Manager and the destination server and then re-execute the command.
100	System error	Collect maintenance information, and contact a Fujitsu SE.



## 1.2 sqcEmSetup (Two-tier Manager Setup Command)

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

These commands can be executed on Manager.

### Before performing this procedure

If the Manager service or daemon is running, stop it by referring to "[Chapter 2 Starting and Stopping Resident Processes](#)". Also check that the relevant resident processes have stopped correctly.

### Syntax

#### [Windows]

```
<Installation directory>\bin\sqcEmSetup.exe -h host name [-s on|off] [-m on|off]
<Installation directory>\bin\sqcEmSetup.exe -u
<Installation directory>\bin\sqcEmSetup.exe -d
```

#### [UNIX]

```
/opt/FJSVssqc/bin/sqcEmSetup.sh -h <host name> [-s on|off] [-m on|off]
/opt/FJSVssqc/bin/sqcEmSetup.sh -u
/opt/FJSVssqc/bin/sqcEmSetup.sh -d
```

### Function

To centrally manage the entire system using an Enterprise Manager, the Two-tier Manager Setup Command must be executed on each Manager after they are installed.

sqcEmSetup (Two-tier Manager Setup Command) creates or removes an environment for two-tier Manager operations where an Enterprise Manager has been installed.

## Note

Do not execute multiple sqcEmSetup command simultaneously.

## Options

**-h <host name>**

Specify either the host name or the IP address of the Enterprise Manager. This option cannot be specified at the same time as the "-u" or "-d" option.

**-s on|off**

If the "-h" option has been specified, this option specifies whether an operation management client will connect to this Manager in order to perform management operations for each department. If this option is not specified, the default value is "off".

- On: Connects an operation management client to this Manager.
- Off: Does not connect an operation management client to this Manager.

## Point

If "on" is specified for this option, the Enterprise Manager can be used to manage the entire system while each Manager can be used to perform management operations for each section.

**-m on|off**

Specify whether to save summary data in the Manager when the operation management client is connected to the Manager and management is performed by Manager.

This option is available when the "-h" option and "-s on" options are specified.

If this option is not specified, then the default value is "on".

- on: Summary data stored in the Enterprise Manager
- off: Summary data stored in each Manager.

The number of Managers to be managed by the Enterprise Manager can be increased if the "-m off" option is specified.

When the "-m off" option is specified, the summary data displayed in the Operation Management Client while connecting to the Enterprise Manager is collected from each Manager.

**-u**

This option cancels the two-tier Manager operation. This option cannot be specified at the same time as the "-h" or "-d" option.

**-d**

This option displays the Enterprise Manager that is currently set up. This option cannot be specified at the same time as the "-h" or "-u" option.

## Return values

Normal termination: 0

Abnormal termination:1

If this command terminates normally, the following message will be output:

```
Command Succeeded.
```

If this command terminates abnormally, the following messages will be output:

```
Usage : sqcEmSetup.exe -h hostname [ -s on|off ] [-m on|off]
sqcEmSetup.exe -u
sqcEmSetup.exe -d
```

When either an option has not been specified or the command has not been used correctly, command help will be displayed.

```
Failed to write environment settings to DSAconfiguration.txt.
Command failed.
```

```
Failed to read environment settings from DSAconfiguration.txt.
Command failed.
```

```
Failed to read environment settings from registry.
Command failed.
```

```
Failed to get service status.
Command failed.
```

(Could not get the status of the Systemwalker SQC DCM service. This message is for Windows only.)

```
DCM is running and so sqcEmSetup can not be run.
Please stop DCM and retry sqcEmSetup.
Command failed.
```

(The Systemwalker SQC DCM service/dcmd process is running.)

```
An error occurred. Cause code = XXX
Command failed.
```

(Another error occurred. "XXX" indicates the error code.)

## Usage example

To set up an environment for two-tier Manager operations, execute this command as shown below.

### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin
C:\Program Files\SystemwalkerSQC\bin>sqcEmSetup.exe -h hostname
```

```
Command Succeeded.  
C:\Program Files\SystemwalkerSQL\bin>
```

**[UNIX]**

```
# cd /opt/FJSVssqc/bin/  
# ./sqcEmSetup.sh -h hostname  
Command Succeeded.  
#
```

To connect an operation management client to the Manager and perform management operations for each section, execute this command as shown below.

**[Windows]**

```
C:\>cd C:\Program Files\SystemwalkerSQL\bin  
C:\Program Files\SystemwalkerSQL\bin>sqcEmSetup.exe -h hostname -s on  
Command succeeded.  
C:\Program Files\SystemwalkerSQL\bin>
```

**[UNIX]**

```
# cd /opt/FJSVssqc/bin/  
# ./sqcEmSetup.sh -h hostname -s on  
Command succeeded.  
#
```

To cancel an existing two-tier Manager operation, execute this command as shown below.

**[Windows]**

```
C:\>cd C:\Program Files\SystemwalkerSQL\bin  
C:\Program Files\SystemwalkerSQL\bin>sqcEmSetup.exe -u  
Command succeeded.  
C:\Program Files\SystemwalkerSQL\bin>
```

**[UNIX]**

```
# cd /opt/FJSVssqc/bin/  
# ./sqcEmSetup.sh -u  
Command succeeded.  
#
```

To display the Enterprise Manager that has been set up, execute this command as shown below.

**[Windows]**

```
C:\>cd C:\Program Files\SystemwalkerSQL\bin
```

```
C:\Program Files\SystemwalkerSQL\bin>sqlEmSetup.exe -d
Enterprise manager host name : XXXX
C:\Program Files\SystemwalkerSQL\bin>
```

[UNIX]

```
# cd /opt/FJSVssqc/bin/
# ./sqlEmSetup.sh -d
Enterprise Manager host name : XXXX
#
```

"XXXX" is the IP address or host name of the server that is currently specified as the Enterprise Manager. If two-tier Manager operations have not been set up, or if there is no Enterprise Manager, the "XXXX" host name section will be left blank.

## File

If this command is completed successfully, the following file will be edited:

[Windows]

```
<Variable file storage directory>\control\DSAconfiguration.txt
```

[UNIX]

```
/etc/opt/FJSVssqc/DSAconfiguration.txt
```

## EE 1.3 sqlHmSetup (Manager Setup Command for Redundant Manager Operation)

### Privileges required for execution

[Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

[UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

This command can be executed on a second Manager of the redundant Manager operations for "pull" operation.

### Before performing this procedure

If the Manager service or daemon is running, stop it by referring to "[Chapter 2 Starting and Stopping Resident Processes](#)". Also check that the relevant resident processes have stopped correctly.

### Syntax

[Windows]

```
<Installation directory>\bin\sqlHmSetup.exe [-u]
```

[UNIX]

```
/opt/FJSVssqc/bin/sqcHmSetup.exe [-u]
```

## Function

If the Manager is to be used in a redundant configuration, the redundancy setup command must be executed on the Manager and Agent/Proxy Manager.

sqcHmSetup (Manager Setup Command for Redundant Manager Operation) creates or removes the Manager environment for redundant Manager operations.

### Note

Do not execute multiple sqcHmSetup command simultaneously.

### Point

Execute this command on only the second Manager for "pull" operations as described in "Tasks to perform on the second Manager" in the *Installation Guide*.

## Options

-u

This option cancels the redundant Manager operations.

## Return values

Normal termination: 0

Abnormal termination: 1

If this command terminates normally, the following message will be output:

```
Command succeeded.
```

If this command terminates abnormally, the following messages will be output:

```
Usage : sqcHmSetup.exe [-u]
```

(The command has not been used correctly.)

```
Failed to write environment settings to dmcoll.ini.  
Command failed.
```

```
Failed to read environment settings from dmcoll.ini.  
Command failed.
```



```
Failed to read environment settings from registry.  
Command failed.
```

(This message is for Windows only.)

```
Failed to get service status.  
Command failed.
```

(Could not get the status of the Systemwalker SQC sqcschdle service/sqcschdle process.)

```
"sqcschdle" is running and so sqcHmSetup can not be run  
Please stop "sqcschdle" and retry sqcHmSetup.  
Command failed.
```

(Systemwalker SQC sqcschdle service/sqcschdle process is running.)

## Usage example

To make a Manager redundant, execute this command as follows:

### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin  
C:\Program Files\SystemwalkerSQC\bin>sqcHmSetup.exe  
Command Succeeded.  
C:\Program Files\SystemwalkerSQC\bin>
```

### [UNIX]

```
# cd /opt/FJSVssqc/bin/  
# ./sqcHmSetup.exe  
Command Succeeded.  
#
```

To cancel redundant Manager operations, execute this command as follows:

### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin  
C:\Program Files\SystemwalkerSQC\bin>sqcHmSetup.exe -u  
Command Succeeded.  
C:\Program Files\SystemwalkerSQC\bin>
```

### [UNIX]

```
# cd /opt/FJSVssqc/bin/  
# ./sqcHmSetup.exe -u  
Command Succeeded.  
#
```

## File

If this command is completed successfully, the following file will be edited:

### [Windows]

```
<Variable file storage directory>\control\data\dmcoll.ini
```

### [UNIX]

```
/etc/opt/FJSVssqc/data/dmcoll.ini
```

## EE 1.4 sqcHaSetup (Agent/Proxy Manager Setup Command for Redundant Manager Operation)

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

This command can be executed on an Agent or Proxy Manager.

### Before performing this procedure

If the service or daemon for the Agent or Proxy Manager is running, stop the service or daemon by referring to "[Chapter 2 Starting and Stopping Resident Processes](#)". Also check that the relevant resident processes have stopped correctly.

### Syntax

#### [Windows]

```
<Installation directory>\bin\sqcHaSetup.exe -h host name  
<Installation directory>\bin\sqcHaSetup.exe -u  
<Installation directory>\bin\sqcHaSetup.exe -d
```

#### [UNIX]

```
/opt/FJSVssqc/bin/sqcHaSetup.sh -h <host name>  
<Installation directory>/bin/sqcHaSetup.sh -u  
<Installation directory>/bin/sqcHaSetup.sh -d
```

### Function

If the Manager is to be used in a redundant configuration, the redundancy setup command must be executed on the Manager and Agent/Proxy Manager.

sqcHaSetup (Agent/Proxy Manager Setup Command for Redundant Manager Operation) creates or removes the Agent or the Proxy Manager environment for redundant Manager operations.

### Note

Do not execute multiple sqcHaSetup command simultaneously.

### Options

-h <host name>

Specify either the host name or the IP address of the Manager that had not been set up when the Agent was first installed. This option cannot be specified together with other options.

-u

This option cancels the redundant Manager operations. This option cannot be specified together with other options.

-d

This option displays the Manager that is currently specified as the connection destination. This option cannot be specified together with other options.

### Note

This option can only be specified with "push" operations.

### Return values

Normal termination: 0

Abnormal termination: 1

If this command terminates normally, the following message will be output:

```
Command Succeeded.
```

If this command terminates abnormally, the following messages will be output:

```
Usage : sqcHaSetup.exe -h hostname
sqcHaSetup.exe -u
sqcHaSetup.exe -d
```

(Either an option has not been specified or the command has not been used correctly.)

```
Failed to write environment settings to DSAconfiguration.txt.
Command failed.
```

```
Failed to read environment settings from DSAconfiguration.txt.
Command failed.
```

```
Failed to read environment settings from registry.  
Command failed.
```

```
Failed to create/delete directory.  
Command failed.
```

```
Failed to get service status.  
Command failed.
```

(Could not get the status of the Systemwalker SQC DCM service. This message is for Windows only.)

```
DCM is running and so sqcHaSetup can not be run.  
Please stop DCM and retry sqcHaSetup.  
Command failed.
```

Systemwalker SQC DCM service/dcmd process is running.

```
An error occurred. Cause code = XXX  
Command failed.
```

(Another error occurred. "XXX" indicates the error code.)

## Usage example

To add a second Manager, execute this command as follows:

### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin  
C:\Program Files\SystemwalkerSQC\bin>sqcHaSetup.exe -h hostname  
Command succeeded.  
C:\Program Files\SystemwalkerSQC\bin>
```

### [UNIX]

```
# cd /opt/FJSVssqc/bin/  
# ./sqcHaSetup.sh -h hostname  
Command succeeded.  
#
```

To cancel redundant Manager operations, execute this command as follows:

### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin  
C:\Program Files\SystemwalkerSQC\bin>sqcHaSetup.exe -u  
Command succeeded.
```

```
C:\Program Files\SystemwalkerSQC\bin>
```

**[UNIX]**

```
# cd /opt/FJSVssqc/bin/  
# ./sqcHaSetup.sh -u  
Command Succeeded.  
#
```

To display the Manager that is currently specified as the connection destination, execute this command as below. (For "push" operations only)

**[Windows]**

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin  
C:\Program Files\SystemwalkerSQC\bin>sqcHaSetup.exe -d  
Manager host name 1 : XXXX  
Manager host name 2 : YYYY  
C:\Program Files\SystemwalkerSQC\bin>
```

**[UNIX]**

```
# cd /opt/FJSVssqc/bin/  
# ./sqcHaSetup.sh -d  
Manager host name 1 : XXXX  
Manager host name 2 : YYYY  
#
```

"XXXX" and "YYYY" are the host names of the servers that are currently specified as the Managers to connect to. If redundant Manager operations have not been set up, then "Manager host name 2" (the "YYYY" section) will be left blank. Also, even if redundant Manager operations have set up, this section will be left blank for pull operations.

**File**

If this command is completed successfully, the following file will be edited:

**[Windows]**

```
<Variable file storage directory>\control\DSAconfiguration.txt
```

**[UNIX]**

```
/etc/opt/FJSVssqc/DSAconfiguration.txt
```



## 1.5 Cluster Setup Commands

This section explains the commands used to create and delete a cluster environment.

### 1.5.1 sqcsetupclp/sqcsetupcls(Cluster setup command)

## Privileges required for execution

### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

## Execution environment

These commands can be executed on an Enterprise Manager or Manager.

## Before performing this procedure

If the resident process of the Enterprise Manager or Manager is running, stop the service or the daemon by referring to "[Chapter 2 Starting and Stopping Resident Processes](#)". Also check that the relevant resident processes have stopped correctly.

## Syntax

### [Windows]

#### (Active node)

```
<Installation directory>\bin\sqcsetupclp -m shared disk -h logical host name
```

#### (Standby node)

```
<Installation directory>\bin\sqcsetupcls -m shared disk
```

### [UNIX]

#### (Active node)

```
/opt/FJSSVssqc/bin/>/bin/sqcsetupclp -m mount point -h logical host name
```

#### (Standby node)

```
/opt/FJSSVssqc/bin/>/bin/sqcsetupcls -m mount point
```

## Function

The Cluster Setup Command must be executed to create the cluster environment.

This section explains sqcsetupclp (the command for creating a cluster environment on the active node) and sqcsetupcls (the command for creating a cluster environment on the standby node).



Do not execute multiple sqcsetupclp/sqcsetupcls command simultaneously.

## Options

### [Windows]

**-m shared disk**

Specifies the drive for the shared disk device to be used by the cluster operation.

**-h logical host name**

Specifies the logical host name or logical IP address to be used by the cluster operation.

#### [UNIX]

**-m <mount point>**

Specifies the mount point for the shared disk device to be used by the cluster operation.

**-h *logical host name***

Specifies the logical host name or logical IP address to be used by the cluster operation.

### Return values

Normal termination: 0

Abnormal termination: 1

If this command terminates normally, the following message will be output:

```
Cluster setup succeeded
```

### Usage example

[Windows]

(Active node: sqcsetupclp)

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin
C:\Program Files\SystemwalkerSQC\bin>sqcsetupclp -m F:\ -h hostname
126 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
0 files copied.
Cluster setup succeeded
```

```
C:\Program Files\SystemwalkerSQL\bin>
```

(Standby node: sqcsetupcls)

```
C:\>cd C:\Program Files\SystemwalkerSQL\bin
C:\Program Files\SystemwalkerSQL\bin>sqcsetupcls.exe -m F:\
Cluster setup succeeded
C:\Program Files\SystemwalkerSQL\bin>
```

#### [UNIX]

(Active node: sqcsetupclp)

```
# cd /opt/FJSVssqc/bin/
# ./sqcsetupclp -m /share -h hostname
Cluster setup succeeded
#
```

(Standby node: sqcsetupcls)

```
# cd /opt/FJSVssqc/bin/
# ./sqcsetupcls -m /share
Cluster setup succeeded
#
```

## 1.5.2 sqcunsetcl (Cluster Release Command)

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

This command can be executed on a Manager or Enterprise Manager.

### Before performing this procedure

If Manager/Enterprise Manager resident processes are running, stop the service or daemon by referring to "[Chapter 2 Starting and Stopping Resident Processes](#)". Check that the resident processes have stopped correctly.

### Format

#### [Windows]

```
<Installation directory>\bin\sqcunsetcl
```

#### [UNIX]



```
/opt/FJSVssqc/bin/sqcunsetcl
```

## Function

This command cancels a Systemwalker Service Quality Coordinator cluster environment.



Do not execute multiple sqcunsetcl command simultaneously.

## Options

None

## Return values

Normal termination: 0

Abnormal termination: 1

# 1.6 Agent for Agentless Monitoring Commands

---

## 1.6.1 sqcRemoteCheck (Agent for Agentless Monitoring Management Communication Confirmation Command)

---

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

This command can be executed on Managers and Proxy Managers.

### Format

#### [Windows]

```
<Installation directory>\bin\sqcRemoteCheck.exe [-h <hostname>]
```

#### [UNIX]

```
/opt/FJSVssqc/bin/sqcRemoteCheck.sh [-h <hostname>]
```

## Function

The agent for Agentless Monitoring management communication confirmation command confirms whether communication is possible between a managed server that has been set up using agent for Agentless Monitoring management and a Manager or Proxy Manager.

The -h option can be used to specify the managed server for which communication is to be confirmed.

### Note

Do not execute multiple sqcRemoteCheck command simultaneously.

## Options

-h <host name>

Specifies the identifier of the managed server for which communication is to be confirmed.

If this option is omitted, all managed servers being managed using agent for Agentless Monitoring management will be targetted by the command.

### Point

In the identifier of the managed server, specify the HOSTNAME string in the remote monitoring configuration file (remoteAgent.txt).

## Return values

Normal termination: 0

Abnormal termination: 1

## Execution results/Output format

Normal termination

The following normal completion message will be sent to standard output.

```
(Success): sqcRemoteCheck succeeded.
```

Example of execution: communication confirmation

```
C:\Program Files\SystemwalkerSQL\bin>sqcRemoteCheck.exe
Server1 OK
Server2 OK
Server3 NG detail=*****dsa_telnet***** ===== Connect Error =====
server: TestServer3 [Server3]
SOCKET Message: The requested name is valid, but no data of the requested type was found.
State: Start connection: Resolve host address
(Success): sqcRemoteCheck.exe succeeded.
```

Abnormal termination

An error message will be sent to standard error output:

(Error error number):Message

The error numbers, content, and action corresponding to the error messages are as shown below.

Error number	Message	Content	Corrective measure
010	Parameter error.	Parameter specification error	Correct the parameter and re-execute the command.
020	invalid argument to '-h'	-h option specification error	Correct -h option's parameter and re-execute the command.
100	System error.	Other error	Collect maintenance information and contact a Fujitsu SE.

#### Example of execution

If the agent for Agentless Monitoring management communication confirmation command is performed using the following definition

#### [Identifier of the managed server]

server1  
server2  
server3

#### [Sample error]

If the sqcRemoteCheck command ends with an error

(Error 100):System error.

## Usage example

### [Windows]

```
C:\Program Files\SystemwalkerSQL\bin>sqcRemoteCheck.exe
Server1 OK
Server2 OK
Server3 NG detail=*****dsa_telnet***** ===== Connect Error =====
server: TestServer3 [Server3]
SOCKET Message: The requested name is valid, but no data of the requested type was found.
State: Start connection: Resolve host address
(Success):sqcRemoteCheck.exe succeeded.
```

### [UNIX]

```
#cd /opt/FJSVssqc/bin
#./sqcRemoteCheck.sh
Server1 OK
Server2 OK
Server3 NG detail=*****dsa_telnet***** ===== Connect Error =====
server: TestServer3 [Server3]
SOCKET Message: Temporary failure in name resolution
State: Start connection: Resolve host address
```

(Success):sqcRemoteCheck succeeded.

## 1.6.2 sqcAgentlessCleanUp (Agent for Agentless Monitoring Management Collection Script Deletion Command)

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

This command can be executed on Managers and Proxy Managers.

### Before performing this procedure

If the Manager/Proxy Manager service or daemon is running, stop it by referring to "[Chapter 2 Starting and Stopping Resident Processes](#)". Also check that the relevant resident processes have stopped correctly.



If the command is executed when Manager/Proxy Manager service or daemon is running, performance data might not be collected.

### Format

#### [Windows]

```
<Installation directory>\bin\sqcAgentlessCleanUp.exe [-h <host name>]
```

#### [UNIX]

```
/opt/FJSVssqc/bin/sqcAgentlessCleanUp.sh [-h <host name>]
```

### Function

The agent for Agentless Monitoring management collection script deletion command deletes script files for agent for Agentless Monitoring management collection that have been deployed to a managed server.

The -h option can be used to specify the managed server of the script files to be deleted.



Do not execute multiple sqcAgentlessCleanUp command simultaneously.

## Information

The agent for Agentless Monitoring management collection script is deployed by restarting the service of the Manager or Proxy Manager.

## Options

-h <host name>

Specify the identifier of the managed server that you want to delete.

If this option is omitted, all managed servers being managed using agent for Agentless Monitoring management will be targetted by the command.

## Point

In the identifier of the managed server, specify the HOSTNAME string in the remote monitoring configuration file (remoteAgent.txt).

## Return values

Normal termination: 0

Abnormal termination (delete failed): 1

## Note

The following directory is not deleted when the managed server is Windows.

- %USERPROFILE%\sql\_temp directory  
(%USERPROFILE% : user profile folder path name)

## Execution results/Output format

Normal termination

The following normal completion message will be sent to standard output.

```
(Success):sqlAgentlessCleanUp.exe succeeded.
```

Example of execution

```
C:\Program Files\SystemwalkerSQL\bin>sqlAgentlessCleanUp.exe
The script for Agent for Agentless Monitoring management collection of the following servers is deleted.
server1
server2
server3
Execute it? (Y/N) : Y
server1 : OK
server2 : OK
server3 : OK
(Success):sqlAgentlessCleanUp.exe succeeded.
```

## Abnormal termination

An error message will be sent to standard error output:

```
(Error error number):Message
```

The error numbers, content, and action corresponding to the error messages are as shown below.

Error number	Message	Content	Corrective measure
010	Parameter error.	Parameter specification error	Correct the parameter and re-execute the command.
020	invalid argument to '-h'	-h option specification error	Correct -h option's parameter and re-execute the command.
030	Failure file delete.	File deleting error	Refer to "detail" of the message displayed in advance of this message and clear it up, then re-execute the command.
100	System error.	Other error	Collect maintenance information and contact a Fujitsu SE

## Example of execution

If the agent for Agentless Monitoring management collection script deletion command is performed using the following definition

### [Identifier of the managed serve]

```
server1
server2
server3
```

### [Sample error]

If the sqcAgentlessCleanUp command fails for file deletion Server2

```
C:\Program Files\SystemwalkerSQL\bin>sqcAgentlessCleanUp.exe
The script for Agent for Agentless Monitoring management collection of the following servers is deleted.
server1
server2
server3
Execute it? (Y/N) : Y
server1 OK
server2 NG : detail=*****dsa_telnet***** ===== Connect Error =====
server: TestServer2 [Server2]
SOCKET Message: The requested name is valid, but no data of the requested type was found.
State: Start connection: Resolve host address
server3 OK
(Error 030): Failure file delete.
```

## Usage Example

### [Windows]

```
C:\Program Files\SystemwalkerSQL\bin>sqcAgentlessCleanUp.exe
```

```
The script for Agent for Agentless Monitoring management collection of the following servers is deleted.
server1
server2
server3
Execute it? (Y/N) : Y

server1 : OK
server2 : OK
server3 : OK

(Success):sqcAgentlessCleanUp.exe succeeded.
```

#### [UNIX]

```
#cd /opt/FJSVssqc/bin
#./sqcAgentlessCleanUp.sh

The script for Agent for Agentless Monitoring management collection of the following servers is deleted.
server1
server2
server3
Execute it? (Y/N) : Y

server1 : OK
server2 : OK
server3 : OK

(Success):sqcAgentlessCleanUp succeeded.
```

## 1.7 PDB Commands

---

This chapter explains the commands that are related to a PDB.

### 1.7.1 sqcPDBcout (CSV Output Command)

---

#### Privileges required for execution

##### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

##### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

#### Execution environment

This command can be executed on Managers, Enterprise Managers and operation management clients.

#### Syntax

For Managers or Enterprise Managers

##### [Windows]

```
<Installation directory>\bin\sqcPDBcout.exe -R record-id [-sys system] [-rid resource-id] [-tmbin time] [-tmfin time]
[-intval interval] [-lcltm on|off] [-h on|off]
```

```
<Installation directory>\bin\sqcPDBcout.exe -f sql-file [-h on|off]
```

[UNIX]

```
/opt/FJSVssqc/bin/sqcPDBcout.sh -R record-id [-sys system] [-rid resource-id] [-tm bin time] [-tm fin time] [-int val interval] [-lcltm on|off] [-h on|off]
```

```
/opt/FJSVssqc/bin/sqcPDBcout.sh -f sql-file [-h on|off]
```

For operation management clients

```
<Installation directory>\bin\sqcPDBcout.exe -R record-id -name manager [-sys system] [-rid resource-id] [-tm bin time] [-tm fin time] [-int val interval] [-lcltm on|off] [-h on|off]
```

```
<Installation directory>\bin\sqcPDBcout.exe -f sql-file -name manager [-h on|off]
```

## Function

This command outputs data stored in a PDB (Summary information or Report information) to CSV format. The command is executed with parameters that specify the conditions to use when extracting information.

### Note

Do not execute multiple sqcPDBcout command simultaneously.

## Options

**-R record-id**

This mode specifies data extraction conditions as options. Specify the record ID in "record-id". Refer to "[Chapter 4 Data Formats](#)" for details on record IDs.

**-f sql-file**

This mode specifies data extraction conditions in SQL. Specify the path to a file containing SQL in "sql-file".

Refer to the following usage example for details on the syntax for SQL statements. Also, refer to "[Chapter 4 Data Formats](#)" for details on table names specified with the FROM clause.

Refer to the following output results for details on field names specified with the SELECT and WHERE clauses.

### Note

- Do not include linefeed code in the middle of the SQL statements.
- Only FROM clause and WHERE clause can be used in the SELECT statement.

**-name manager**

This mode specifies a Manager. Specify in "manager" the host name of a Manager that has the PDB data to be output.

**-sys system**

Specify the name of the system for which data is to be extracted. If this option is omitted, the data of all systems will be targeted.



**-rid resource-id**

Specify the ID of the resource for which data is to be extracted. If this option is omitted, the data of all resources will be targeted.

**-tmbin time**

Specify the extraction start time using GMT (Greenwich Mean Time) or local time according to -lcltm option. If this option is omitted, all the data in the PDB, from the oldest to the newest, will be extracted.

The following format is used to specify the time:

"YYYY-MM-DD hh:mm:ss" (YYYY: year; MM: month; DD: day; hh: hour; mm: minute; ss: second)

**-tmfin time**

Specify the extraction end time using GMT (Greenwich Mean Time) or the local time according to -lcltm option. If this option is omitted, all the data in the PDB, from the newest to the oldest, will be extracted.

The following format is used to specify the time:

"YYYY-MM-DD hh:mm:ss" (YYYY: year; MM: month; DD: day; hh: hour; mm: minute; ss: second)

**-intval interval (can be specified only for Drilled-Down/Report information)**

Specify whether to display header information at the beginning of the output result. If this option is omitted, header information is not displayed.

**-lcltm on|off**

This option specifies whether the local time is to be used in the extraction start and end times specified by the -tmbin and -tmfin options, and in the time in the data that is output in CSV format. If this option is omitted, GMT (Greenwich Mean Time) will be used.

The time zone set in the machine that executes the sqcPDBcout command is set as the local time.

Note that if "86400" (data for one day) is specified in the -intval option and this option is set to "on", data dated "YYYY-MM-DD 00:00:00" Greenwich Mean Time will be converted to the local time before being displayed.

**-h on|off**

Specify whether to display header information at the beginning of the output result. If this option is omitted, header information is not displayed.

**Execution results/Output format**

When header information is attached to the beginning of output results, information such as the following will be displayed.

- For Summary information:

```
system_name,record_id,resource_id,start_date_time,end_date_time,end_time,data_num1,
data_num2,data_num3,data_num4,data_num5,data_num6,data_num7,data_text1
```

- For Drilled-Down/Report information:

```
system_name,record_id,resource_id,start_date_time,end_date_time,consol_flag,consol_interval,
coverage,data_num1,data_num2,data_num3,data_num4,data_num5,data_num6,data_num7,data_text1,
```

data\_text2,data\_text3,data\_text4,data\_text5

The items that appear in header information are explained below.

**system\_name**

The system name

**record\_id**

The record ID. Refer to "[Chapter 4 Data Formats](#)" for details.

**resource\_id**

The resource ID

**start\_date\_time**

The collection start time using GMT (Greenwich Mean Time)

**end\_date\_time**

The collection end time using GMT (Greenwich Mean Time)

**end\_time** (for Summary information only)

The time component of the collection end time

**time\_flag** (only if the -f option is specified)

Internal control information

**ime\_zone** (only if the -f option is specified)

Internal control information

**daylight\_saving** (only if the -f option is specified)

Internal control information

**cycle\_nr** (only if the -f option is specified, and for Summary information only)

Internal control information

**consol\_flag** (for Drilled-Down/Report information only)

The interval type

**consol\_interval** (for Drilled-Down/Report information only)

The interval time

**coverage** (for Drilled-Down/Report information only)

The data coverage rate. For example, a coverage rate of 1 indicates no lost data. A coverage rate of 0.9 indicates that 10% of data has been lost.

**data\_num1 to data\_num7**

The numerical value of each field. Refer to "[Chapter 4 Data Formats](#)" for details.

**data\_text1 to data\_text5**

The text of each field. Refer to "[Chapter 4 Data Formats](#)" for details.

## Return values

0 : Normal termination

> 0 : Abnormal termination (error details are as follows)

### 1. PDB lock error

This error occurs if a contention occurs between the sqcPDBcout command and another process, such as a process that writes information collected by an Agent or Proxy Manager to the PDB, or a process that performs a PDB maintenance operation at 2:00 AM every day.

If this error occurs, keep executing the sqcPDBcout command until it terminates normally. Note, however, that if the PDB lock remains in effect for a long time during the time frame that the PDB maintenance process is executed, adjust the timing of the sqcPDBcout command so that it does not coincide with the timing of the PDB maintenance process.

### 2. Manager communication error

This error occurs when communication with a Manager fails. If this error occurs, check whether the Manager is running correctly. If the Manager is stopped, start it before executing this command.

### 3. Other error

Other errors can be caused by factors such as incorrectly specified options and problems with the environment. If an error occurs, review the option details and the execution environment.

## Usage example 1

The following execution example uses the option specification (-R) as an extraction condition.

### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin
C:\Program Files\SystemwalkerSQC\bin>sqcPDBcout -R WIN_DISKSPACE -sys LABRET -rid C:\ -tmbin
"2004-07-01 10:00:00" -intval 3600 -h off
LABRET,WIN_DISKSPACE,C:\,2004-07-01 11:00:00,2004-07-01 12:00:00,2,3600,1,74857984,2113864192,,,,,,,,,
LABRET,WIN_DISKSPACE,C:\,2004-07-01 12:00:00,2004-07-01 13:00:00,2,3600,1,105043456,2113864192,,,,,,,,,
End.
```

### [UNIX]

```
# cd /opt/FJSVssqc/bin/
# ./sqcPDBcout.sh -R WIN_DISKSPACE -sys LABRET -rid C:\ -tmbin "2004-07-01 10:00:00" -intval 3600 -h off
LABRET,WIN_DISKSPACE,C:\,2004-07-01 11:00:00,2004-07-01 12:00:00,2,3600,1,74857984,2113864192,,,,,,,,,
LABRET,WIN_DISKSPACE,C:\,2004-07-01 12:00:00,2004-07-01 13:00:00,2,3600,1,105043456,2113864192,,,,,,,,,
End.
```

## Usage example 2

The following execution example uses the SQL file specification (-f) as an extraction condition.

### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin
C:\Program Files\SystemwalkerSQC\bin>sqcPDBcout -f C:\sql.txt
LABRET,WIN_DISKSPACE,C:\,2004-07-01 11:00:00,2004-07-01 12:00:00,2,3600,1,74857984,2113864192,,,,,,,,,
LABRET,WIN_DISKSPACE,C:\,2004-07-01 12:00:00,2004-07-01 13:00:00,2,3600,1,105043456,2113864192,,,,,,,,,
```

```
End.
```

#### [UNIX]

```
# cd /opt/FJSVssqc/bin/  
# ./sqcPDBcout.sh -f /tmp/sql.txt  
LABRET,WIN_DISKSPACE,C:\,2004-07-01 11:00:00,2004-07-01 12:00:00,2,3600,1,74857984,2113864192,,,,,,,,,  
LABRET,WIN_DISKSPACE,C:\,2004-07-01 12:00:00,2004-07-01 13:00:00,2,3600,1,105043456,2113864192,,,,,,,,,  
End.
```

In this case, the content of sql.txt is as follows. There is no linefeed code in the middle of the actual SQL statement.

```
select * from resource_data where record_id='WIN_DISKSPACE' AND system_name='LABRET' AND  
consol_interval=3600;
```

## 1.7.2 sqcPDBcload (User Data Input Command)

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

This command can be executed on Enterprise Managers, Managers, Proxy Managers and Agents.

### Syntax

#### [Windows]

```
<Installation directory>\bin\sqcPDBcload.exe -u udata-file -i conv-file
```

#### [UNIX]

```
/opt/FJSVssqc/bin/sqcPDBcload.sh -u udata-file -i conv-file
```

### Function

This command saves user data in the PDB.

This command should be executed after performing the definitions described in "Managing User Data" in the *User's Guide*.

### Options

-u udata-file

Specifies the user data file (CSV file) to be stored in a PDB.

## -i conv-file

Specifies the data conversion definition file (as an ini file). A data conversion file specifies rules for converting user data to the record format used in a PDB. The following is an example:

```
[USERDATA]
consol_flag=2
record_id=1
col_resource_id=2,5
col_start_date_time=6
col_data_num1=10
col_data_num2=9
col_data_text1=4
```

### Data conversion definition file (conv-file)

Refer to "[Chapter 4 Data Formats](#)" for details on the format of created records.

#### consol\_flag

Specifies the data type. The data types listed below are available. The display functions and retention period of each data type are different. Decide which data type to use by referring to "Product Architecture" of the *Technical Guide*.

- 0: Monitor data
- 1: Resource data (10 minutes)
- 2: Resource data (1 hour)
- 3: Resource data (24 hours)

If 0 is specified, record "SUM\_UDATA\_#"  
is created.

If 1, 2 or 3 is specified, record "UDATA\_#" is created.

#### record\_id

Specifies which record between "SUM\_DATA\_1" and "SUM\_DATA\_20" or between "U\_DATA\_1" and "U\_DATA\_20" is to be created.

#### col\_resource\_id

Specifies the field number of the user data file that will be set as a resource ID. A resource ID is a unique identifier for identifying a record.

In the case of process information, for example, the process name is used as the resource ID.

It is also possible to connect multiple fields and use these together as a resource ID. If "col\_resource\_id=2,5" is specified, fields 2 and 5 are used in combination as the resource ID.

#### col\_start\_date\_time

Specifies the field number that will be set as the collection start time.

Note that data is stored in the following format:

"YYYY-MM-DD [hh[:mm[:ss]]]"

'MM-DD-YYYY [hh[:mm[:ss]]]'

(YYYY: year; MM: month; DD: day; hh: hour; mm: minute; ss: second)

"col\_data\_num1" to "col\_data\_num7"

Specifies the field number of the user data file data (numerical) to be stored in field "smudndata1" to "smudndata7" or "udndata1" to "udndata7" (or to "udndata5" if the Record ID is "UDATA\_1", "UDATA\_2", "UDATA\_3", "UDATA\_6", "UDATA\_7", "UDATA\_8", "UDATA\_11", "UDATA\_12", "UDATA\_13", "UDATA\_16", "UDATA\_17", or "UDATA\_18").

"col\_data\_text1" to "col\_data\_text7"

Specifies the field number of the user data file data (text) to be stored in field "smudtxt1" or "udtxt1" to "udtxt7" (or to "udndata5" if the Record ID is "UDATA\_1", "UDATA\_2", "UDATA\_3", "UDATA\_6", "UDATA\_7", "UDATA\_8", "UDATA\_11", "UDATA\_12", "UDATA\_13", "UDATA\_16", "UDATA\_17", or "UDATA\_18").

Examples of data conversion definition files and the records that are created

Data conversion definition file specification	Created record		Remarks
	Record ID	Field Name	
consol_flag=0 record_id=1 col_data_num3=9	SUM_UDATA_1	smud1data3	If "0" is specified for consol_flag, record "SUM_DATA_n" is created.  If "1" is specified for record_id, record "SUM_DATA_1" is created.  If "9" is specified for col_data_num3, the 9th field of the CSV file is stored in field "sumud1data3".
consol_flag=1 record_id=1 col_data_num3=9	UDATA_1	ud1data3	If 1, 2 or 3 is specified for console_flag, record "UDATA_n" is created.  If "1" is specified for record_id, record "UDATA_1" is created.  If "9" is specified for col_data_num3, the 9th field of the CSV file is stored in field "ud1data3".
consol_flag=3 record_id=2 col_data_num3=9	UDATA_2	ud2data3	If 1, 2 or 3 is specified for console_flag, record "UDATA_n" is created.  If "2" is specified for record_id, record "UDATA_2" is created.  If "9" is specified for col_data_num3, the 9th field of the CSV file is stored in field "ud2data3".

### Return values

0: Normal termination

1: Abnormal termination



User data will not be stored in a PDB in the following cases:

- The data in the field number specified by col\_resource\_id is empty.
- The data in the field number specified by col\_start\_date\_time is in the wrong format.
- The format of the collection start time does not match the format used by the PDB.

## Example

### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQL\bin
C:\Program Files\SystemwalkerSQL\bin>sqlPDBload -u C:\temp\udata.csv -i C:\temp\conv.ini
sqlPDBload succeeded
```

### [UNIX]

```
# cd /opt/FJSVssqc/bin/
# ./sqlPDBload.sh -u /tmp/udata.csv -i /tmp/conv.ini
sqlPDBload succeeded.
```

In this case, the content of udata.csv is as follows:

```
2004-09-09 10:00:00,kaminaka,2,octets,data,767872,28856,22400
```

The content of conv.ini is as follows:

```
[USERDATA]
consol_flag=2
record_id=1
col_resource_id=2,3
col_start_date_time=1
col_data_num1=6
col_data_num2=7
col_data_text1=4
```

## 1.7.3 sqlPDBerase (Data Deletion Command)

---

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

This command can be executed on Managers and Enterprise Managers.

### Before executing this procedure

If the Enterprise Manager/Manager resident processes are running, then stop the service/daemon (refer to "[Chapter 2 Starting and Stopping Resident Processes](#)" for details). Additionally, make sure that the resident processes have stopped correctly.

## Syntax

### [Windows]

```
<Installation directory>\bin\sqcPDBerase.exe system [-r record_id]
```

### [UNIX]

```
/opt/FJSVssqc/bin/sqcPDBerase.sh system [-r record_id]
```

## Function

This command deletes the data in a PDB that relates to a specified system.

When this command is executed, the user will be prompted to confirm the deletion. Enter either "Y" (Yes) to delete the applicable data or "N" (No) to cancel.



Do not execute multiple sqcPDBerase (Data deletion command) simultaneously.

## Operand

system

Specifies the name of the system from which data is to be deleted.

This operand is case sensitive.

## Option

-r record\_id

Specify the ID of the record to be deleted. Refer to "[Chapter 4 Data Formats](#)" for details on record IDs.

## Return values

0: Normal termination

1: Abnormal termination

## Usage example

Example of execution when -r option is not specified:

### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQL\bin
C:\Program Files\SystemwalkerSQL\bin>sqcPDBerase TEST1
Do you erase data of system_name"TEST1"?(Y/N)
y
sqcPDBerase succeeded
```

### [UNIX]

```
# cd /opt/FJSVssqc/bin/
# ./sqcPDBerase.sh TEST1
Do you erase data of system_name"TEST1"?(Y/N)
```



```
y
sqcPDBerase succeeded.
```

Example of execution when -r option is specified:

**[Windows]**

```
C:\Program Files\SystemwalkerSQL\bin>sqcPDBerase TEST1 -r UDATA_1
#####The conditions to erase #####
Record ID : UDATA_1
#####
Do you erase data of system_name "TEST1"?(Y/N)
y
sqcPDBerase succeeded.
```

**[UNIX]**

```
# /opt/FJSVssqc/bin/sqcPDBerase TEST1 -r UDATA_1
#####The conditions to erase #####
Record ID : UDATA_1
#####
Do you erase data of system_name "TEST1"?(Y/N)
y
sqcPDBerase succeeded.
```

**Execution results/Output format**

**Normal termination**

The following normal completion message will be sent to standard output.

```
sqcPDBerase succeeded.
```

**Abnormal termination**

An error message will be sent to standard error output:

```
Parameter Error
Configuration Information of "TEST1" does not exist.
The specified system name might be incorrect.
```

**1.7.4 sqcPDBexport (Configuration Information Export Command)**

**Privileges required for execution**

**[Windows]**

The privileges of a user belonging to the "Administrators" group are required to execute this command.

**[UNIX]**

The privileges of a system administrator (superuser) are required to execute this command.

## Execution environment

This command can be executed on Managers and Enterprise Managers.

## Syntax

### [Windows]

```
<installation directory>\bin\sqcPDBexport.bat -o folder_path [-n host_name]
```

### [UNIX]

```
/opt/FJSSVssqc/bin/sqcPDBexport.sh -o folder_path [-n host_name]
```

## Function

This command outputs configuration information in a PDB to a file.

Configuration information is information that represents the Manager name, the Agent name, and the type of information collected by that Agent.

Configuration information that is output can be used in the following situations:

- When, to transfer a Manager to a separate machine, the configuration information in a PDB taken from the original Manager to a new Manager is rewritten with the name of the new Manager
- When a PDB is initialized (recreated), but the configuration information of the previous environment is used as is

## Options

-o folder\_path

Specifies the path of the folder where the configuration information data file (agententry.tmp) will be output.

-n host\_name

Specifies the host name of the Manager where the configuration information will be transferred. If this option is omitted, the actual host name will be used.

## Return values

0 : Normal termination

1 : Abnormal termination

## Usage example

### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin  
C:\Program Files\SystemwalkerSQC\bin>sqcPDBexport -o C:\temp -n HOSTNAME
```

To store the output configuration information file (agententry.tmp) in a PDB, place the file in the following directory and start the Systemwalker SQC DCM service.

```
<Variable file storage directory>\transfer\DsaPDBWriter
```

#### [UNIX]

```
# cd /opt/FJSVssqc/bin/  
# ./sqcPDBexport.sh -o /tmp -n HOSTNAME
```

To store the output configuration information file (agententry.tmp) in a PDB, place the file in the following directory and start the dcmd process.

```
/var/opt/FJSVssqc/temp/DsaPDBWriter
```

The configuration information will be stored in the PDB within approximately 60 seconds. The agententry.tmp file will then be deleted.

## 1.7.5 sqcSetPDBManage (PDB Retention Period Modification Command)

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

This command can be executed on a Manager or Enterprise Manager.

#### Note

The Systemwalker Service Quality Coordinator DCM service/dcmd process must already be started when this command is executed. Refer to "[Chapter 2 Starting and Stopping Resident Processes](#)" for information on how to check it.

### Format

#### [Windows]

#### Note

Please move current directory to <Installation directory>\bin, and then execute this command.

```
sqcSetPDBManage.bat -M <retention period> | -m <retention period> | -h <retention period> | -d <retention period> | -s
```

#### [UNIX]

```
/opt/FJSVssqc/bin/sqcSetPDBManage.sh -M <retention period> | -m <retention period> | -h <retention period> | -d <retention period> | -s
```

## Function

In Manager or Enterprise Manager environment, this command changes the retention period parameters for the summary, Drilled-Down and report data being managed.

### Note

Do not execute multiple `sqlSetPDBManage` command simultaneously.

## Options

There is no upper limit for the values specified for the `-m`, `-h` and `-d` options.

`-M <retention period>`

Specify the retention period for summary data using an integer between 1 and 31. (Unit: days)

`-m <retention period>`

Specify the retention period for resource data (10 minutes) using a positive, non-zero integer. (Unit: days)

`-h <retention period>`

Specify the retention period for resource data (one hour) using a positive, non-zero integer. (Unit: weeks)

`-d <retention period>`

Specify the retention period for resource data (one day) using a positive, non-zero integer. (Unit: months)

`-s`

Displays the current value for the retention period.

### Note

If the retention period is increased, the amount of disk space used will increase proportionately. Refer to "Estimating the size of the performance database/archive file" in the *Installation Guide* for information about how to estimate the volume of data when the retention period is changed.

## Return values

0: Normal termination

1: Parameter error

10: Other error

## Example

To change the resource data (10 minutes) retention period to 10 days:

[Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQL\bin
C:\Program Files\SystemwalkerSQL\bin\sqlSetPDBManage.bat -m 10
```

[UNIX]

```
/opt/FJSVssqc/bin/sqcSetPDBManage.sh -m 10
```

### Execution results/Output format

#### Normal termination (changing the retention period; option specification: -M/-m/-h/-d)

The following normal completion message will be sent to standard output:

```
(Success)sqcSetPDBManage succeeded.
```

#### Normal termination (displaying the current retention period; option specification: -s)

Information about the current retention period (data type, retention period) will be sent to standard output:

```
DataType, Maintenance period  
-----, -----  
Monitor, 3 days  
DrillDown, 7 days  
Reprot(1Hour), 6 weeks  
Reprot(1Day), 13 months  
(Success)sqcSetPDBManage succeeded.
```

### Point

Data types displayed are as follows

- Monitor: Summary data
- Drill Down: Resource data (10 minutes)
- Report: Resource data (one hour) and Resource data (one day)

#### Abnormal termination

The following error message will be sent to standard error output:

```
(Error) : error number, message
```

Error message output format (CSV)

Error number	Message	Content
000	sqcSetPDBManage succeeded.	Normal
010	Parameter error. (Error detail code)	Parameter specification error
100	System error. (Error detail code)	Other error



The new definitions will be used as the retention period information for the PDB maintenance processing (executed at 2:00 AM every day). In this processing, any data that has exceeded the retention period is deleted, so complete all change operations before this processing starts.

## 1.7.6 sqcSetPDBStore (PDB File Location Change Command)

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

This command can be executed on a Manager or Enterprise Manager.

### Before executing this procedure

If the Enterprise Manager/Manager resident processes are running, then stop the service/daemon (refer to "[Chapter 2 Starting and Stopping Resident Processes](#)" for details). Additionally, make sure that the resident processes have stopped correctly.

### Synopsis

- Changing the PDB file location

#### [Windows]

```
<installation directory>\bin\sqcSetPDBStore.bat -M|-m|-h|-d -S <storage location directory path name>
```

#### [UNIX]

```
/opt/FJSSVssqc/bin/sqcSetPDBStore.sh -M|-m|-h|-d -S <storage location directory path name>
```

- Displaying the PDB file location

#### [Windows]

```
<installation directory>\bin\sqcSetPDBStore.bat -M|-m|-h|-d -V
```

#### [UNIX]

```
/opt/FJSSVssqc/bin/sqcSetPDBStore.sh -M|-m|-h|-d -V
```

- Returning the PDB file location to its initial value (If the storage location of the performance database (management data) is changed by following the steps described in "Management Data" in the *Installation Guide*, following directory means destination location of the management data)

#### [Windows]

```
<installation directory>\bin\sqcSetPDBStore.bat -M|-m|-h|-d -R
```

#### [UNIX]

```
/opt/FJSVssqc/bin/sqcSetPDBStore.sh -M|-m|-h|-d -R
```

## Function

This command changes, displays and returns the PDB file (summary data and resource data (10 minutes, 1 hour and 1day) location to its initial value (If the storage location of the performance database (management data) is changed by following the steps described in "Management Data" in the *Installation Guide*, following directory means destination location of the management data) in Enterprise Manager and Manager environments.



Do not execute this command more than once at the same time.

## Options

-M

Executes summary data PDB file operations.

-m

Executes resource data (10 minutes) PDB file operations.

-h

Executes resource data (1 hour) PDB file operations.

-d

Executes resource data (1 day) PDB file operations.

-S <directory path>

Changes the PDB file location to the specified directory path.

Specify the -M, -m, -h, and -d options together to change the location of the PDB files for each option.

Specify the absolute and existing path.

-V

Displays the current PDB file location.

Specify the -M, -m, -h, and -d options together to display the location of the PDB files for each option.

-R

Returns the PDB file location to the initial value (If the storage location of the performance database (management data) is changed by following the steps described in "Management Data" in the *Installation Guide*, following directory means destination location of the management data).

Specify the -M, -m, -h, and -d options together to return the location of the PDB files for each option to the initial value. The initial value of the PDB file location is as follows.

### [Windows]

```
<Variable file storage directory>\data\
```

### [UNIX]

```
/var/opt/FJSVssqc/PDB/
```

## Return values

0 : Normal termination

1 : Parameter error

10 : Other errors

### Example

- When the summary data PDB file location is changed:

#### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQL\bin
C:\Program Files\SystemwalkerSQL\bin>sqlSetPDBStore.bat -M -S D:\PDB_summary
```

#### [UNIX]

```
# /opt/FJSVssqc/bin/sqlSetPDBStore.sh -M -S /data/PDB/PDB_summary
```

- When the resource data (10 minutes) PDB file location is displayed:

#### [Windows]

```
C:\>cd C:\Program Files\SystemwalkerSQL\bin
C:\Program Files\SystemwalkerSQL\bin>sqlSetPDBStore.bat -m -V
```

#### [UNIX]

```
# /opt/FJSVssqc/bin/sqlSetPDBStore.sh -m -V
```

### Execution result/Output format

#### Normal termination (returning the PDB file location to its initial value; option specification: -S/-R)

The following normal completion message will be sent to standard output.

```
(Success) sqlSetPDBStore succeeded.
```

#### Normal termination (displaying the PDB file location; option specification: -V)

The current file location and data type will be sent to the standard output.

```
DataType = %s
Stored directory path name = %s
(Success) sqlSetPDBStore succeeded.
```



One of the following is output for "DataType":

- Monitor: Summary data (when the -M option is specified)
- Drill Down: Resource data (10 minutes) (when the -m option is specified)
- Report(1Hour): Resource data (1 hour) (when the -h option is specified)
- Report(1Day): Resource data (1 day) (when the -d option is specified)

In "Stored directory path name", the above data type PDB file storage location (absolute path) is output.

### Other operations

When the -S and -R options are specified in this command, the following files will be updated if the command has succeeded:

#### [Windows]



```
<Variable file storage directory>\data\pdb.dat
```

[UNIX]

```
/var/opt/FJSVssqc/PDB/pdb.dat
```

This file may be changed by following the steps described in "Management Data" in the Installation Guide.

## 1.8 Manager Setting Commands

---

### 1.8.1 sqcSetMgrInfo(for Agent/Proxy Manager)

---

#### Function

This command sets and displays host name or IP address of Manager recognized by the Agent/Proxy Manager.



Do not execute multiple sqcSetMgrInfo command simultaneously.

#### Privileges required for execution

[Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

[UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

#### Execution environment

Proxy Manager/Agent

#### Before performing this procedure

If the Proxy Manager/Agent resident processes are running, then stop the service/daemon. Additionally, make sure that the resident processes have stopped correctly.

#### Format

- To change the manager recognized by the Proxy Manager/Agent:

[Windows]

```
<installation directory>\bin\sqcSetMgrInfo.bat -h <host name/IP address>
```

[UNIX]

```
/opt/FJSVssqc/bin/sqcSetMgrInfo.sh -h <host name/IP address>
```

- To display the manager recognized by the Proxy Manager/Agent:

**[Windows]**

```
<installation directory>\bin\sqcSetMgrInfo.bat -v
```

**[UNIX]**

```
/opt/FJSVssqc/bin/sqcSetMgrInfo.sh -v
```

**Options**

-h <host name/IP address>

Specify the host name or IP address of the Manager recognized by the Proxy Manager/Agent.

-v

Use this option to display the host name or the IP address of the Manager that is currently set.

**Return values**

Normal termination: 0

Abnormal termination: 1

**Usage example**

To set the manager recognized by the Proxy Manager/Agent:

**[Windows]**

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin  
C:\Program Files\SystemwalkerSQC\bin>sqcSetMgrInfo.bat -h new_manager
```

**[UNIX]**

```
/opt/FJSVssqc/bin/sqcSetMgrInfo.sh -h new_manager
```

To display the manager recognized by the Proxy Manager/Agent:

**[Windows]**

```
C:\>cd C:\Program Files\SystemwalkerSQC\bin  
C:\Program Files\SystemwalkerSQC\bin>sqcSetMgrInfo.bat -v
```

**[UNIX]**

```
/opt/FJSVssqc/bin/sqcSetMgrInfo.sh -v
```

**Execution results/Output format**

Normal termination (with -h option)

The following normal completion message will be sent to standard output.

```
(Success) sqcSetMgrInfo succeeded.
```

Normal termination (with -v option)

The following normal completion message will be sent to standard output.

```
Manager IP Address/Hostname : new_manager
(Success) sqcSetMgrInfo succeeded.
```

Abnormal termination

An error message will be sent to standard error output.

```
(Error) error number,Message
```

The error numbers, messages, and content corresponding to the error messages are as shown below.

Error number	Message	Content
010	Parameter error.( Error detail code)	Parameter specification error
100	System error.( Error detail code)	Other error

## 1.8.2 sqcSetMgrInfo(for Operation Management Client)

### Function

This command sets host name or IP address of Manager recognized by the Operation Management Client.



Do not execute multiple sqcSetMgrInfo command simultaneously.

### Privileges required for execution

The privileges of a user belonging to the "Administrators" group are required to execute this command.

### Execution environment

Operation Management Client

### Format

```
<installation directory>\bin\sqcSetMgrInfo.exe -p <host name/IP address>
```

### Options

-p <host name/IP address>

Specify the host name or IP address of the Manager recognized by the Operation Management Client..

### Return values

Normal termination: 0

Abnormal termination: 1

### Usage example

To set the manager recognized by the Operation Management Client:

```
C:\Program Files\SystemwalkerSQL-C\bin\sqcSetMgrInfo.exe -p new_manager
```

### Execution results/Output format

#### Normal termination

The following normal completion message will be sent to standard output.

```
(Success) sqcSetMgrInfo succeeded.
```

#### Abnormal termination

An error message will be sent to standard error output.

```
(Error) error number,Message
```

The error numbers, messages, and content corresponding to the error messages are as shown below.

Error number	Message	Content
010	Parameter error.( Error detail code)	Parameter specification error
100	System error.( Error detail code)	Other error

## 1.9 Scheduled Report Operation Commands

This section explains the commands that are used to create and delete scheduled reports that have been registered.

By using these commands in combination with scheduler software such as Systemwalker Operation Manager, scheduled reports can be manipulated automatically.

### 1.9.1 sqcMakeReport (Scheduled Report Creation Command)

#### Function

This command creates a scheduled report that has been registered using the **Scheduled Report View**. If this command is registered with a scheduler, the operation can be performed automatically.

Created reports can be viewed in the **Scheduled Report View**.

#### Privileges required for execution

The privileges of a user belonging to the "Administrators" group are required to execute this command.



#### Note

- To execute this command under Windows Server 2008/Windows Vista and later, execute with the administrator privilege.

**For Windows Server 2012/Windows 8**

Right-click the **Start** menu (located at the bottom-left corner of the Desktop) and select **Command Prompt (Admin)**. Run the command from the Command Prompt.

**For Windows Server 2008/Windows 7/Windows Vista**

From the **Start** menu, select **All Programs - Accessories**, then right-click **Command Prompt**, and select **Run as administrator**. Run the command from the Command Prompt.

- To execute this command by registering it with Task Scheduler for the Windows Server 2008/Windows Vista and later, select the **General** tab of the **Properties** window for the task to be registered, and then select the **Run with highest privileges** checkbox.

**Execution environment**

This command can be executed on an operation management client

**Syntax**

<Installation directory>\ bin\sqcMakeReport.exe	-c console_define [-g system_group] [-t begin_time   -w begin_day   -d begin_date] daily weekly monthly
<Installation directory>\ bin\sqcMakeReport.exe	-c console_define [-g system_group] [-s start_day -e end_day] daily weekly monthly

From here onwards, the syntax is for linkage to ServerView Resource Orchestrator.

<installation directory>\bin \sqcMakeReport.exe	-a COMMON_REPORT [-t begin_time   -w begin_day   -d begin_date] daily weekly monthly
<installation directory>\bin \sqcMakeReport.exe	-a COMMON_REPORT [-s start_day -e end_day] daily weekly monthly
<installation directory>\bin \sqcMakeReport.exe	-r tenant_name [-t begin_time   -w begin_day   -d begin_date] daily weekly monthly
<installation directory>\bin \sqcMakeReport.exe	-r tenant_name [-s start_day -e end_day] daily weekly monthly

**Options**

**-c console\_define**

Specifies the console definition name for the report to be created. If a report is being created by specifying the console definition name, this parameter cannot be omitted.

This option can not be specified simultaneously with -a and -r.

**-g system\_group**

Specifies the system group name. Only registered scheduled reports whose conditions include the specified system group will be created. If this option is omitted, all scheduled reports that have been registered will be created.



By registering the command with a scheduler with this option specified, report scheduling can be performed in system group units.

**-t begin\_time**

Specifies the time (0 to 23) in local time that a daily report will start. A daily report will be created from 24 hours of data that commences at the specified time. If this option is omitted, the starting time defaults to "0".

**-w begin\_day**

Specifies the day of the week (Su, Mo, Tu, We, Th, Fr, Sa) that a weekly report will start. A weekly report will be created from 7 days of data that commences on the specified day of the week. If this option is omitted, the starting day defaults to Sunday ("Su").

**-d begin\_date**

Specifies the date (1 to 28) that a monthly report will start. A monthly report will be created from one month of data that commences on the specified date. If this option is omitted, the starting date defaults to "1".

**-s start\_day**

This option is used to set the term of the report when executing this command manually. It specifies the starting date of the report. The format of the starting date is as follows:

YYYYMMDD

**-e end\_day**

This option is used to set the term of the report when executing this command manually. It specifies the ending date of the report. The format of the ending date is as follows:

YYYYMMDD

**-a COMMON\_REPORT**

If linking to ServerView Resource Orchestrator, create the reports that have been registered as common reports in tenant units.

This option can not be specified simultaneously with -c and -r.

**-r tenant\_name**

If linking to ServerView Resource Orchestrator, specify the tenant name or L-Platform name.

This option can not be specified simultaneously with -c and -a.

**Operand**

Specifies the report format (daily, weekly or monthly).

**Return value**

0: Normal termination

> 0: Abnormal termination



**Note**

If the console definition read fails, then the message below will be displayed:

The console definition name specified in the -c option might not be correct. Check the name and then try again.

- Failed : Policy.xml download from Manager

---

### Usage example 1

The following example shows how to generate a daily report that begins at 9:00 am. It generates only reports where Business System A is specified for the registration conditions for scheduled reports.

```
> sqcMakeReport -c DefaultConsole -g Business System A -t 9 daily
```

### Usage example 2

The following uses registered scheduled reports to generate a daily report for 01 September 2012.

```
> sqcMakeReport -c DefaultConsole -s 20120901 -e 20120901 daily
```

### Usage example 3

If linking to ServerView Resource Orchestrator, the following uses registered common reports to generate a daily report for 01 September 2012.

```
> sqcMakeReport -a COMMON_REPORT -s 20120901 -e 20120901 daily
```

### Usage example 4


The following uses reports registered in tenant A to generate a daily report for 01 September 2012.

```
> sqcMakeReport -r tenant A -s 20120901 -e 20120901 daily
```

### Note

---

When the Report Creation Command is executed, a number of pop-up messages such as the one shown below may open and then close on the Windows desktop momentarily.

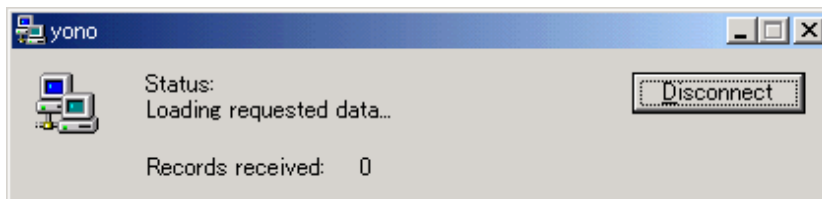

These windows are displayed when data is extracted from a PDB. They do not indicate a problem.

Exception code: If the command terminates abnormally with exception code 0xe06d7363, the desktop heap may be insufficient. Increase the size of the desktop heap by referring to "How to increase the size of the desktop heap" of the *User's Guide (Console Edition)*.

---

These pop-up windows can be prevented by specifying a different user from the usual login user in the "Run as:" option when registering the command with the scheduler.

After executing the Scheduled Report Creation Command, check the results in the **Scheduled Report View**, as explained in "Scheduled Report View" of the *User's Guide (Console Edition)*.

## 1.9.2 sqcDeleteReport (Scheduled Report Deletion Command)

### Function

This command is used to delete scheduled reports that are older than the number of days for which reports are to be stored. If this command is registered with the scheduler, it will delete scheduled reports automatically.

### Privileges required for execution

The privileges of a user belonging to the "Administrators" group are required to execute this command.



- To execute this command under Windows Server 2008/Windows Vista and later, execute with the administrator privilege.

#### For Windows Server 2012/Windows 8

Right-click the **Start** menu (located at the bottom-left corner of the Desktop) and select **Command Prompt (Admin)**. Run the command from the Command Prompt.

#### For Windows Server 2008/Windows 7/Windows Vista

From the **Start** menu, select **All Programs - Accessories**, then right-click **Command Prompt**, and select **Run as administrator**. Run the command from the Command Prompt.

- To execute this command by registering it with Task Scheduler for the Windows Server 2008/Windows Vista and later, select the **General** tab of the **Properties** window for the task to be registered, and then select the **Run with highest privileges** checkbox.

### Execution environment

This command can be run on an operation management client.

### Syntax

<Installation directory> \\bin\sqcDeleteReport.exe	-c console_define -d retention_days -w retention_days -m retention_days
<installation directory>\bin \\sqcDeleteReport.exe	-r tenant_name -d retention_days -w retention_days -m retention_days

### Options

-c console\_define

Specifies the console definition name for the report to be deleted. If a report is being deleted by specifying the console definition name, this parameter cannot be omitted.

This option can not be specified simultaneously with -r.

-d retention\_days

Specifies the number of days (0 to 1500) to store daily reports. This parameter cannot be omitted.

-w retention\_days

Specifies the number of days (0 to 1500) to store weekly reports. This parameter cannot be omitted.



-m retention\_days

Specifies the number of days (0 to 1500) to store monthly reports. This parameter cannot be omitted.

-r tenant\_name

If linking to ServerView Resource Orchestrator, specify the tenant name or L-Platform name of the report to be deleted. If a report is being deleted by specifying the tenant name or L-Platform name, this parameter cannot be omitted.

This option can not be specified simultaneously with -c.



.....  
If the number of days to store reports is set to 0, no reports in the specified report format will be deleted.

Reports that were created more than XX days before the command was executed will be deleted (where "XX" is the number of retention days).  
.....

### Return value

0: Normal termination

>0: Abnormal termination

### Usage example 1

For scheduled reports in defaultConsole, the following example shows the options used to specify a daily report storage period of 10 days, a weekly report storage period of 60 days and a monthly report storage period of 365 days.

```
> sqcDeleteReport -c DefaultConsole -d 10 -w 60 -m 365
```

### Usage example 2

For scheduled reports in tenant A, the following example shows the options used to specify a daily report storage period of 10 days, a weekly report storage period of 60 days and a monthly report storage period of 365 days.

```
> sqcDeleteReport -r tenantA -d 10 -w 60 -m 365
```

## 1.10 Console Definition Commands

---

### 1.10.1 sqcSetupConsoleDefine (Console Definition Configuration Command)

---

#### Function

Using console define files previously created, this command can perform the registration of the following items usually performed with management console.

- Console definition
- System group
- Proxy Manager

- Agent

## Note

Do not execute multiple `sqcSetupConsoleDefine` command simultaneously.

## Privileges required for execution

The privileges of a user belonging to the "Administrators" group are required to execute this command.

## Execution environment

This command can be run on an operation management client.

## Syntax

```
<Installation directory>\bin\sqcSetupConsoleDefine.bat -f <console_define_file>
```


## Options

`-f <console_define_file>`

Specifies the console definition file.

This file is created in XML format. The suffix is [xml]. Follow the formats described below.

Tag	Attribute	Content
ConsoleDefine	DisplayName	<p>Specify the console definition name.</p> <p>Only alphanumeric characters [a-z, A-Z, 0-9], hyphens ('-') and underscores ('_') can be used.</p> <p>Note '-'(hyphen) cannot be used as the first character.</p> <p>Upper and lower characters are not distinguished.</p> <p>The length must be within 64 characters.</p>
SystemGroup	DisplayName	<p>Specify the display name to identify the system group.</p> <p>This must be unique within the management configuration. However, use Agent name or ProxyManager name as the display name is allowed. The following characters of Shift-JIS code can be used.</p> <ul style="list-style-type: none"><li>- Alphanumeric characters</li><li>- Symbols (exception: \, &lt; &gt; " \$ ' [ ] = &amp; ).</li></ul> <p>Characters dependent on machines are not allowed.</p> <p>Length must be within 64 characters.</p>
ProxyManager	DisplayName	<p>Specify the display name to identify the Proxy Manager.</p> <p>This must be unique within the management configuration. However, use Agent name or system group name as display name is allowed. The following characters of Shift-JIS code can be used.</p> <ul style="list-style-type: none"><li>- Alphanumeric characters</li><li>- Symbols (exception: \, &lt; &gt; " \$ ' [ ] = &amp; ).</li></ul>

		<p>Characters dependent on machines are not allowed.</p> <p>Length must be within 64 characters.</p>
	InstanceName	<p>Specify an identify name for the Proxy Manager. The registered names must be unique within one group. However, a same host name can be registered to different groups. In case one Proxy Manager is used for multiple business, it is allowed to create a system group for every business, and register the same proxy manager to these system groups. However, the display name of the ProxyManager must be different. The identify name will be displayed by the sqcSetPolicy (policy application command). Regarding the policy application command, refer to "<a href="#">1.1.3 sqcSetPolicy (Policy Application Command)</a>".</p>
Agent	DisplayName	<p>Specify a display name to identify the Agent. This must be unique within the management configuration. However, use Agent name or ProxyManager name as display name is allowed. The following characters of Shift-JIS code can be used.</p> <ul style="list-style-type: none"> <li>- Alphanumeric characters</li> <li>- Symbols (exception: \, &lt; &gt; " \$ ' [ ] = &amp; ).</li> </ul> <p>Characters dependent on machines are not allowed.</p> <p>Length must be within 64 characters.</p>
	InstanceName	<p>Specify a identify name for the Agent. The registered names must be unique within one group. However, a same host name can be registered to different groups. In case one Agent is used for multiple business, it is allowed to create a system group for every business, and register the same agent to these system groups. However, the display name of the Agent must be different. The identify name will be displayed by the sqcSetPolicy (policy application command). Regarding the policy application command, refer to "<a href="#">1.1.3 sqcSetPolicy (Policy Application Command)</a>".</p> <p> <b>Point</b></p> <p>.....</p> <p>If the Agent is in cluster operation, specify the physical host name or physical IP address.</p> <p>.....</p>

 **Point**

.....

Prepare a definition file for every console definition. You can do this by copying the sample file (ConsoleDefine\_sample.xml) to a proper file and editing it.

Location of the sample file:

```
<installation directory>\www\control\ConsoleDefine_sample.xml
```

Define multiple SystemGroup tags (the block from <SystemGroup> to </SystemGroup>) to define multiple system groups.

Define multiple ProxyManager tags (the block from <ProxyManager> to </ProxyManager>) to define multiple ProxyManagers.

Define multiple Agent tags (the block from <Agent> to </Agent>) to define multiple Agents.

.....

## Return values

Normal termination: 0

Abnormal termination: 1

## Execution results/Output format

### Normal termination

The following normal completion message will be sent to standard output.

```
(Success):sqcSetupConsoleDefine
```

### Example of execution

```
"C:\Program Files\SystemwalkerSQC-C\bin\sqcSetupConsoleDefine.bat" -f "C:\tmp\condef1.xml"  
(Success):sqcSetupConsoleDefine
```

### Abnormal termination

An error message will be sent to standard error output:

```
(Error):Message,error number
```

The error numbers, messages, and content corresponding to the error messages are as shown below.

Error number	Message	Content	Corrective measure
010	Parameter error.(error detail code)	Parameter specification error	Modify the parameter and run again.
020	Server access error.(error detail code)	Server communication error	Confirm the connection state of the Manager and run again.
030	Definition file error.(error detail code)	Error reading the console definition file.	Confirm the console define file and run again.
100	System error.(error detail code)	Other error	Collecting the maintenance information and contact a Fujitsu SE.

### Example of execution

In case the specified console definition file not exist.

```
"C:\Program Files\SystemwalkerSQC-C\bin\sqcSetupConsoleDefine.bat" -f "C:\tmp\condef2.xml" "C:/tmp/  
condef2.xml" is not found.  
(Error):Parameter error.(11), 010
```

### Example of execution

In case the Systemwalker SQC DCM service of the Manager is not running.

```
"C:\Program Files\SystemwalkerSQC-C\bin\sqcSetupConsoleDefine.bat" -f "C:\tmp\condef1.xml" Cannot  
connect to the Manager.  
(Error):Server access error.(21), 020
```

### Example of execution

In case Agent name is not unique (mistake in console definition file)

```
"C:\Program Files\SystemwalkerSQC-C\bin\sqcSetupConsoleDefine.bat" -f "C:\tmp\condef3.xml" Specified
"DisplayName" of "Agent" already exists.
```

```
DisplayName = Agent01
```

```
(Error):Definition file error.(34), 030
```

## Usage example

Below is an example of creating a console definition under following condition.

Full path of the console definition file

```
C:\tmp\condef1.xml
```

Definition content

Console definition name

```
Console1
```

System group

```
GRP1
```

```
GRP2
```

Register content of GRP1

ProxyManager

```
Display name: SYSTEM01/System name: SYSTEM01
```

Agent

```
Display name: SYSTEM01/System name: SYSTEM01
```

Register content of GRP2

Agent

```
Display name: SYSTEM01#/System name: SYSTEM01
```

```
Display name: SYSTEM02/System name: SYSTEM02
```

### Console definition file (C:\tmp\condef1.xml)

```
<?xml version="1.0" encoding="Shift_JIS"?>
<ConsoleSettings>
  <ConsoleDefine DisplayName="Console1">
    <SystemGroup DisplayName="GRP1">
      <ProxyManager DisplayName="SYSTEM01" InstanceName="SYSTEM01"/>
      <Agent DisplayName="SYSTEM01" InstanceName="SYSTEM01"/>
    </SystemGroup>
    <SystemGroup DisplayName="GRP2">
      <Agent DisplayName="SYSTEM01#" InstanceName="SYSTEM01"/>
      <Agent DisplayName="SYSTEM02" InstanceName="SYSTEM02"/>
    </SystemGroup>
  </ConsoleDefine>
</ConsoleSettings>
```

## 1.10.2 sqcGetXMLConfig (Configuration Information Collection Command)

---

### Function

Based on registered console definitions, this command can perform the collection of the configuration information of ProxyManager/Agent which is usually performed via a define GUI.

## Note

Do not execute multiple sqcGetXMLConfig command simultaneously.

## Privileges required for execution

The privileges of a user belonging to the "Administrators" group are required to execute this command.

## Execution environment

This command can be run on an operation management client.

## Syntax

```
<Installation directory>\bin\sqcGetXMLConfig.bat -c console_define [-g system_group] [-t]
```

## Note

Specify the options in the sequence of -c console\_define [-g system\_group] [-t].

## Options

-c <console\_define>

Specify the console definition name of the target of the configuration information collection.

-g <system\_group>

Specify system group. The configuration information of the ProxyManager/Agent registered in the specified system group will be collected.

If this option is omitted, the configuration information for ProxyManager/Agent registered in all system groups will be collected.

-t

If this option is specified, the collection date time of the configuration information of the ProxyManager/Agent will be displayed.

## Return values

Normal termination: 0

Abnormal termination: 1

## Execution results/Output format

Normal termination

The following normal completion message will be sent to standard output.

```
System group name 1
<ProxyManager>
Display name 1(Host name 1), Configuration information accession date time
```

```

<Agent>
Display name 1(Host name 1), Configuration information accession date time

System group name 2
<Agent>
Display name 2(Host name 2),
Display name 3(Host name 3), Configuration information accession date time

(Success): sqcGetXMLConfig

```

\* If the configuration information could not be taken, the configuration information accession date time will be blank and this command terminates normally.

#### Example of execution

```

GRP1
<ProxyManager>
SYSTEM01(SYSTEM01), 2011-08-22 19:34:12
<Agent>
SYSTEM01(SYSTEM01), 2011-08-22 19:34:13

GRP2
<Agent>
SYSTEM01#(SYSTEM01), 2011-08-22 19:34:14
SYSTEM02(SYSTEM02), 2011-08-22 19:34:15

(Success): sqcGetXMLConfig

```

#### Abnormal termination

An error message will be sent to standard error output:

```
(Error):Message,error number
```

Error messages, corresponding error numbers, contents, and corrective measures are as follows.

Error number	Message	Content	Corrective measure
010	Parameter error.(error detail code)	Parameter specification error	Modify the parameter and try again.
020	Server access error.(error detail code)	Server communication error	Confirm the connection state of the Manager and try again.
100	System error.(error detail code)	Other error	Collecting the maintenance information and contact a Fujitsu SE.

#### Example of execution

In case the specified console definition name not exist

```

"C:\Program Files\SystemwalkerSQC-C\bin\ sqcGetXMLConfig.bat" -c Console1
Target console definition (Console1) is not found.
(Error):Parameter error.(11), 010

```

#### Example of execution

In case the Systemwalker SQC DCM service of the Manager is not running.

```

"C:\Program Files\SystemwalkerSQC-C\bin\ sqcGetXMLConfig.bat" -c Console1
Cannot connect to the Manager.
(Error):Server access error.(21), 020

```

## Usage Example

Below is an example collecting console definition under following condition.

Console definition name

Console1

```
"C:\Program Files\SystemwalkerSQC-C\bin\sqcGetXMLConfig.bat" -c Console1
```

The following is an example collecting the date time of configuration information's collection date time under following contents.

Console definition name

Console1

System group

GRP1

```
"C:\Program Files\SystemwalkerSQC-C\bin\sqcGetXMLConfig.bat" -c Console1 -g GRP1 -t
```

## 1.11 ServerView Resource Orchestrator Linkage Commands

---

### 1.11.1 sqcSetRorInfo (ServerView Resource Orchestrator Linkage Setup Command)

---

#### Function

The ServerView Resource Orchestrator linkage setup command performs setup for linking to ServerView Resource Orchestrator.



Do not execute multiple sqcSetRorInfo command simultaneously.

#### Privileges required for execution

The privileges of a user belonging to the "Administrators" group are required to execute this command.



- To execute this command under Windows Server 2008/Windows Vista and later, execute with the administrator privilege.

#### **For Windows Server 2012/Windows 8**

Right-click the **Start** menu (located at the bottom-left corner of the Desktop) and select **Command Prompt (Admin)**. Run the command from the Command Prompt.

#### **For Windows Server 2008/Windows 7/Windows Vista**

From the **Start** menu, select **All Programs - Accessories**, then right-click **Command Prompt**, and select **Run as administrator**. Run the command from the Command Prompt.



- To execute this command by registering it with Task Scheduler for the Windows Server 2008/Windows Vista and later, select the **General** tab of the **Properties** window for the task to be registered, and then select the **Run with highest privileges** checkbox.
- 

## Execution environment

This command can be executed on an operation management client

## Syntax

```
<installation directory>\bin\sqcSetRorInfo.bat -h <RORHostname> -d <SSOServerName(FQDN)> [-p  
<HTTPServerPort>]
```

```
<installation directory>\bin\sqcSetRorInfo.bat -v
```

## Options

-h <RORHostname >

Specify the host name or IP address of the ServerView Resource Orchestrator Manager.

This option can not be used with -v option.

-d <SSOServerName(FQDN)>

Specify the host name or IP address or FQDN of the ServerView SSO Authentication Server. This option can not be used with -v option.

-p <HTTPServerPort>

Specify the port number of the Interstage HTTP Server of the Server that ServerView Resource Orchestrator Manager are installed. (default: 80)This option can not be used with -v option.

-v

Use this option to confirm setting content. This option can not be used with other options.

## Return values

Normal termination: 0

Improper options: 10

Error not identified: 40

Broken setting file: 50

## Execution results/Output format

### Normal termination

- The following normal completion message will be sent to standard output.

```
(Success) sqcSetRorInfo succeeded.
```

## Usage Example

```
C:\Program Files\SystemwalkerSQC-C\bin>sqcSetRorInfo.bat -h 127.0.0.2 -d SSOServerName
```

## 1.11.2 sqcSetRorUpgrade(ServerView Resource Orchestrator Collection Items Change Command)

---

### Function

The collection items of the Systemwalker Service Quality Coordinator bundled with ServerView Resource Orchestrator is limited.

This command changes the ServerView Resource Orchestrator collection items to Systemwalker Service Quality Coordinator collection items.

Also, this command changes the ServerView Resource Orchestrator Agent collection items to Systemwalker Service Quality Coordinator Agent for Server, or Agent for Business collection items.



Do not execute multiple sqcSetRorUpgrade command simultaneously.

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

The command can be executed on a ServerView Resource Orchestrator Manager, or ServerView Resource Orchestrator Agent.

### Before performing this procedure

If the resident processes of the Systemwalker Service Quality Coordinator bundled with ServerView Resource Orchestrator are started, refer to "[Chapter 2 Starting and Stopping Resident Processes](#)" to stop the services/daemons. Also confirm that the resident processes are stopped normally.

### Syntax

In case of ServerView Resource Orchestrator Manager

#### [Windows]

```
<ServerView Resource Orchestrator installation directory >\SQCM\bin\sqcSetRorUpgrade.bat -a [sqc-m | sqc-a-sv | sqc-a-biz]
<ServerView Resource Orchestrator installation directory >\SQCM\bin\sqcSetRorUpgrade.bat -d
<ServerView Resource Orchestrator installation directory >\SQCM\bin\sqcSetRorUpgrade.bat -c
```

#### [UNIX]

```
/opt/FJSVssqc/bin/sqcSetRorUpgrade.sh -a [sqc-m | sqc-a-sv | sqc-a-biz]
/opt/FJSVssqc/bin/sqcSetRorUpgrade.sh -d
/opt/FJSVssqc/bin/sqcSetRorUpgrade.sh -c
```

In case of ServerView Resource Orchestrator Agent

[Windows]

```
<ServerView Resource Orchestrator installation directory >\RCXCTMGA\bin\sqcSetRorUpgrade.bat -a [sqc-m |
sqc-a-sv | sqc-a-biz]
<ServerView Resource Orchestrator installation directory >\RCXCTMGA\bin\sqcSetRorUpgrade.bat -d
<ServerView Resource Orchestrator installation directory >\RCXCTMGA\bin\sqcSetRorUpgrade.bat -c
```

[UNIX]

```
/opt/FJSVssqc/bin/sqcSetRorUpgrade.sh -a [sqc-m | sqc-a-sv | sqc-a-biz]
/opt/FJSVssqc/bin/sqcSetRorUpgrade.sh -d
/opt/FJSVssqc/bin/sqcSetRorUpgrade.sh -c
```

## Options

-a [sqc-m | sqc-a-sv | sqc-a-biz]

sqc-m

Changes the ServerView Resource Orchestrator Manager collection items to Systemwalker Service Quality Coordinator Manager items.

sqc-a-sv

Changes the ServerView Resource Orchestrator Agent collection items to Systemwalker Service Quality Coordinator Agent for Server items.

sqc-a-biz

Changes the ServerView Resource Orchestrator Agent collection items to Systemwalker Service Quality Coordinator Agent for Business

-d

Restores the ServerView Resource Orchestrator Manager or Agent collection items

-c

Displays the setting state of collection items.

## Return values

Normal termination: 0

Abnormal termination: Other than 0

## Usage Example 1

Changes ServerView Resource Orchestrator Manager collection items

[Windows]

```
C:\> cd C:\Fujitsu\ROR\SQCM\bin
C:\Fujitsu\ROR\SQCM\bin> sqcSetRorUpgrade.bat -a sqc-m
Command Succeeded.
C:\Fujitsu\ROR\SQCM\bin>
```

[UNIX]

```
# cd /opt/FJSVssqc/bin/
# ./sqcSetRorUpgrade.sh -a sqc-m
Command Succeeded.
#
```

Changes ServerView Resource Orchestrator Agent collection items

In case of Agent for Server

[Windows]

```
C:\> cd C:\Fujitsu\ROR\RCXCTMGA\bin
C:\Fujitsu\ROR\RCXCTMGA\bin> sqcSetRorUpgrade.bat -a sqc-a-sv
Command Succeeded.
C:\Fujitsu\ROR\RCXCTMGA\bin>
```

[UNIX]

```
# cd /opt/FJSVssqc/bin/
# ./sqcSetRorUpgrade.sh -a sqc-a-sv
Command Succeeded.
#
```

In case of Agent for Business

[Windows]

```
C:\> cd C:\Fujitsu\ROR\RCXCTMGA\bin
C:\Fujitsu\ROR\RCXCTMGA\bin> sqcSetRorUpgrade.bat -a sqc-a-biz
Command Succeeded.
C:\Fujitsu\ROR\RCXCTMGA\bin>
```

[UNIX]

```
# cd /opt/FJSVssqc/bin/
# ./sqcSetRorUpgrade.sh -a sqc-a-biz
Command Succeeded.
```

```
#
```

## Usage Example 2

Restores ServerView Resource Orchestrator Manager collection items

[Windows]

```
C:\> cd C:\Fujitsu\ROR\SQCM\bin
C:\Fujitsu\ROR\SQCM\bin> sqcSetRorUpgrade.bat -d
Command Succeeded.
C:\Fujitsu\ROR\SQCM\bin>
```

[UNIX]

```
# cd /opt/FJSVssqc/bin/
# ./sqcSetRorUpgrade.sh -d
Command Succeeded.
#
```

Restores ServerView Resource Orchestrator Agent collection items

[Windows]

```
C:\> cd C:\Fujitsu\ROR\RCXCTMGA\bin
C:\Fujitsu\ROR\RCXCTMGA\bin> sqcSetRorUpgrade.bat -d
Command Succeeded.
C:\Fujitsu\ROR\RCXCTMGA\bin>
```

[UNIX]

```
# cd /opt/FJSVssqc/bin/
# ./sqcSetRorUpgrade.sh -d
Command Succeeded.
#
```

## Usage Example 3

Displays the setting state of collection items. Following is the output in case collection items changed to Agent for Server.

[Windows]

```
C:\> cd C:\Fujitsu\ROR\RCXCTMGA\bin
C:\Fujitsu\ROR\RCXCTMGA\bin> sqcSetRorUpgrade.bat -c
License : Systemwalker Service Quality Coordinator
InstallType : Agent for Server
C:\Fujitsu\ROR\RCXCTMGA\bin>
```

[UNIX]

```
# cd /opt/FJSVssqc/bin/
# ./sqcSetRorUpgrade.sh -c
License : Systemwalker Service Quality Coordinator
InstallType : Agent for Server
#
```

License: Display current license.

- ServerView Resource Orchestrator : ServerView Resource Orchestrator
- Systemwalker Service Quality Coordinator : Systemwalker Service Quality Coordinator

InstallType: Display current install type.

- Manager : means Manager
- Agent for Usage : means Agent for Usage
- Agent for Business : means Agent for Business
- Agent for Server : means Agent for Server

**Notes**

The name of followings install types will be displayed as Agent even if this command has been executed.

[Windows]

The install type names displayed in the list of [Add or Remove Programs] or [Add or Remove Applications]

[Linux]

The name of install type displayed in [Description] of rpm command's output.

# 1.12 sqcSetSELinux (SELinux Support Setup Command)

**Function**

This command performs the setup or removal for the support of environment where SELinux (Security-Enhanced Linux) is enabled.



Do not execute multiple sqcSetSELinux command simultaneously.



If SELinux (Security-Enhanced Linux) has been enabled at the time of installation, this command will be executed automatically, the setup of support for Linux environment will be performed. So it's unnecessary to execute this command again.

Execute this command if you enable SELinux(Security-Enhanced Linux) after installation.

**Privileges required for execution**

[Linux]

The privileges of a system administrator (superuser) are required to execute this command.

## Execution environment

This command can be executed on Enterprise Manager, Manager, Proxy Manager, and Agent.

## Syntax

[Linux]

```
/opt/FJSVssqc/bin/sqcSetSELinux.sh -s  
/opt/FJSVssqc/bin/sqcSetSELinux.sh -u
```

## Options

-s

Perform setup for the support of Linux environment where SELinux is enabled.

-u

Remove the setup for the support of Linux environment where SELinux is enabled.

## Return values

Normal termination: 0

Abnormal termination: above 0

## Execution results/Output format

Normal termination

The following normal completion message will be sent to standard output.

```
Command succeeded.
```

Example of execution

```
# /opt/FJSVssqc/bin/sqcSetSELinux.sh -s  
Command succeeded.
```

Abnormal termination

An error message will be sent to standard error output:

```
ERROR: Failed to execute "/usr/sbin/semodule".  
Command failed.
```

The error numbers, content, and action corresponding to the error messages are as shown below.

Message	Content	Corrective measure
Usage : sqcSetSELinux.sh -s   -u	There is syntax error.	Try the command again with correct syntax.

Message	Content	Corrective measure
ERROR: The command can only be executed by the root.	This command can only be executed with the privileges of a system administrator.	Execute the again with the privileges of a system administrator(super user).
INFO: It is not SELinux environment.("<command name>" not found)	The necessary module for SELinux is not found.("<command>" not found).	After you have enable SELinux normally, make sure the command is present and try again.
WARNING: The operation setting of SELinux is not set.	The setting for SELinux has not been made.	The setting for SELinux has been removed or has not been made. So nothing is necessary.
ERROR: Failed to execute "<command executed>".	The execution of the command failed. "<executed command>"	Make sure the failed command can be executed and try again.
WARNING: It has already been defined.	The setup has been done.	The setup has been done. So nothing is necessary.
INFO: SELinux function is disabled.	SELinux is not enabled.	SELinux is not enabled so nothing can be done.
ERROR: Failed to compile the policy module of SELinux.	The compilation of SELinux policy module failed.	Correct the problem indicated by the message and try again.

Example of execution

```
# /opt/FJSVssqc/bin/sqcSetSELinux.sh -s
ERROR: Failed to execute "/usr/sbin/semodule".
Command failed.
```

## Usage Example

Perform the setting for the support of Linux environment where SELinux is enabled.

[Linux]

```
# /opt/FJSVssqc/bin/sqcSetSELinux.sh -s
```

Remove the setting for the support of Linux environment where SELinux is enabled.

[Linux]

```
# /opt/FJSVssqc/bin/sqcSetSELinux.sh -u
```

## 1.13 sqcCheckAlertconfig(Threshold Monitoring Definition Check Command)

### Function

This command checks whether the definition of the threshold definition (alertconfig.txt) is correct.

If you want to check because the threshold monitoring function doesn't behave as expected or if you want to check whether the setting for threshold monitoring is correct, you can use this command to check whether there are syntax errors.

Execute this command on the system where the definition is performed.





Do not execute multiple sqcCheckAlertconfig command simultaneously.

### Privileges required for execution

#### [Windows]

The privileges of a user belonging to the "Administrators" group are required to execute this command.

#### [UNIX]

The privileges of a system administrator (superuser) are required to execute this command.

### Execution environment

This command can be executed on Enterprise Manager, Manager, Proxy Manager, and Agent.

### Syntax

#### [Windows]

```
<installation directory>\bin\sqcCheckAlertconfig.bat  
<installation directory>\bin\sqcCheckAlertconfig.bat -f <full path of the threshold definition file (alertconfig.txt)>
```

#### [UNIX]

```
/opt/FJSVssqc/bin/sqcCheckAlertconfig.sh  
<installation directory>/bin/sqcCheckAlertconfig.sh -f <full path of the threshold definition file (alertconfig.txt)>
```

### Options

-f <full path of the threshold definition file (alertconfig.txt)>

Specify the threshold definition file you want to check by full path. If this option is not specified, the currently set threshold definition file (alertconfig.txt) will be checked. Refer to the [Threshold Monitoring Definition] of Users Guide for the location of currently set threshold monitoring definition.

### Return values

Normal termination (including the case there is error in threshold definition): 0

Abnormal termination (failed to check the threshold monitoring definition.): 1

### Execution results/Output format

#### Normal termination

The following normal completion message will be sent to standard output.

```
C:\> "C:\Program Files\SystemwalkerSQL\bin\sqcCheckAlertconfig.bat"  
Check alertconfig file.  
-----  
The definition of alertconfig file is correct.
```

-----  
 Command succeeded.

### Abnormal termination

An error message will be sent to standard error output: The message indicates the place of the error first encountered.

Message	Content	Corrective measure
ERROR: <conffilename>:( detailed message)	Because of "detailed messages", failed to open <conffilename>	Correct the problem indicated by "detailed message" and try again.
ERROR: <conffilename>, line <N>, col <C>, value = <value>:(wrong definition content)	There is a mistake indicated by "wrong definition content" in file <conffilename> line <N> item <C> definition <value>	Modify the definition indicated by "wrong definition content" and try again.
ERROR: <conffilename>, line <N>, col <C>:(wrong definition content)	There is a mistake indicated by "wrong definition content" in file <conffilename> line <N> item <C>	Modify the definition indicated by "wrong definition content" and try again.
ERROR: <conffilename>, line <N>: ( wrong definition content)	There is a mistake indicated by "wrong definition content" in file <conffilename> line <N>	Modify the definition indicated by "wrong definition content" and try again.
"<conffilename>" is not exist or file.	The specified <conffilename> is not found, or is not a file.	Confirm whether the file name specified is correct or is full path, correct it and try again.
(Error) : Parameter error. Usage : sqcCheckAlertconfig.bat [-f <alertconfig>]	There is mistake in the parameter specified.	Confirm and modify the parameter specified and try again.

<conffilename>, <N>, <C>, <value>, (wrong definition content) are variable.

### Example of execution 1

```
C:\>"C:\Program Files\SystemwalkerSQL\bin\sqcCheckAlertconfig.bat" -f c:\alerconfig.txt
"c:/alertconfig.txt" is not exist or file.
(Error) : Parameter error.
Usage : sqcCheckAlertconfig.bat [-f <alertconfig>]
```

### Example of execution 2

```
C:\> "C:\Program Files\SystemwalkerSQL\bin\sqcCheckAlertconfig.bat"
Check alertconfig file.
-----
ERROR: alertconfig.txt, line 82, col 1, value = AlertId1: Alert Id is not unique.
-----
Command succeeded.
```

## Usage Example 1

The setting for threshold monitoring was made however no messages were noticed at expected timing. Execute the command as follows. At the example below, the [AlertId1] at item 1, line 82 in currently set threshold definition is not unique. Make sure the Alert Id is unique.

[Windows]

```
C:\> "C:\Program Files\SystemwalkerSQL\bin\sqcCheckAlertconfig.bat"
Check alertconfig file.
-----
ERROR: alertconfig.txt, line 82, col 1, value = AlertId1: Alert Id is not unique.
-----
Command succeeded.
```

[UNIX]

```
#!/opt/FJSVssqc/bin/sqcCheckAlertconfig.sh
Check alertconfig file.
-----
ERROR: alertconfig.txt, line 82, col 1, value = AlertId1: Alert Id is not unique.
-----
Command succeeded.
```

### Usage Example 2

In case you want to check the threshold monitoring definition that will be used later, execute the command as follows. At the example below, the [01:00:00] of item 7, line 84 of the threshold monitoring definition is before start time (Start time). Make sure end time (End time) must be after the start time (Start time).

[Windows]

```
C:\> "C:\Program Files\SystemwalkerSQL\bin\sqcCheckAlertconfig.bat"-f c:\alertconfig.txt
Check alertconfig file.
-----
ERROR: c:\alertconfig.txt, line 84, col 7, value = 01:00:00: End time must be >= Start time.
-----
Command succeeded.
```

[UNIX]

```
#!/opt/FJSVssqc/bin/sqcCheckAlertconfig.sh -f /tmp/alertconfig.txt
Check alertconfig file.
-----
ERROR: /tmp/alertconfig.txt, line 84, col 7, value = 01:00:00: End time must be >= Start time.
-----
Command succeeded.
```

## 1.14 genpwd (password encryption command)

---

### Function

Generates encrypted passwords.

It is necessary to execute this command to generate encrypted passwords to add to the password parameter definition for connection in the following two cases; Connection Account configuration file (remoteAccount.txt) for agent for Agentless Monitoring and Configuration information file (ecoAgentInfo.txt) of the SNMP agent (if the SNMP agent is version 3) for ECO information.

### Note

Do not execute multiple genpwd command simultaneously.

## Required privileges

### [Windows]

The Administrators group user privileges are required.

### [UNIX]

System administrator (superuser) privileges are required.

## Execution environment

This command can be executed on Enterprise Manager, Manager, Proxy Manager, and Agent.

## Syntax

### [Windows]

```
<Installation directory>\bin\genpwd.exe
```

### [UNIX]

```
/opt/FJSVssqc/bin/genpwd.sh
```

## Options

None.

## Termination status

Normal termination: 1

Abnormal termination: Other than 1

## Usage example

Execute as follows to generate encrypted passwords.

After executing the command, a dialog appears asking for the password and confirmation of the password. Enter the password to be encrypted.

Copy the generated text and paste it into the password parameter in the definition file.

### [Windows]

```
C:\> cd C:\Program Files\SystemwalkerSQL\bin
C:\Program Files\SystemwalkerSQL\bin>genpwd.exe
Password:
Confirm password:

bpmM2i65/s+k5YhGb15JKw==
C:\Program Files\SystemwalkerSQL\bin>
```

### [UNIX]

```
# cd /opt/FJSVssqc/bin
# ./genpwd.sh
Password:
Confirm password:

bpmM2i65/s+k5YhGb15JKw==
#
```

## 1.15 swSilentSetup(Silent Installation Command)

---

### Function

This command performs the silent installation.

By reading from previously created file which containing necessary information for installation, this command can perform the installation automatically.



Do not execute multiple swSilentSetup command simultaneously.

### Required privileges

#### [Windows]

The Administrators group user privileges are required.

#### [UNIX]

System administrator (superuser) privileges are required.

### Syntax

#### [Windows]

```
DVD-ROM drive:\swSilentSetup.bat -t < installation type> -f < path of the installation information file>
```

#### [UNIX]

```
DVD-ROM drive/ swSilentSetup.sh -t < installation type> -f < path of the installation information file>
```

### Options

```
-t <sqc-em | sqc-m | sqc-pm | sqc-a-sv | sqc-a-biz | sqc-cl>
```

Specify the installation type for silent installation:

- sqc-em: perform silent installation for Enterprise Manager.
- sqc-m: perform silent installation for Manager.
- sqc-pm: perform silent installation for ProxyManager.
- sqc-a-sv: perform silent installation for Agent for Server.
- sqc-a-biz: perform silent installation for Agent for Business.
- sqc-cl: perform silent installation for Operation Management Client.

-f <Install information file path >

Specify the absolute path of the installation information file for silent installation.

Refer to "Create an installation information file" in the *Installation Guide* for more information about installation information file.

## Return values

0: Normal termination

2: Error in parameter specification.

4: Error in installation information file specification.

34: Installer was executed doubly.

35: Install failed because inconsistent installation exists.

36: There is a mistake in the value of installation parameter, or prerequisite condition is not matched.

Other: Other error

## Usage example

[Windows]

```
D:\swSilentSetup.bat -t sqc-a-sv -f D:\tools\Sample\SilentInstall\sqc_ag_pm_win.csv
```

[UNIX]

```
/mnt/swSilentSetup.sh -t sqc-a-biz -f /mnt/tools/Sample/SilentInstall/sqc_ag_pm_ux.csv
```

## Execution results/Output format

Normal termination

Check the return value to determine normal termination.

Abnormal termination

Check the return value to determine abnormal termination.

Corrective measures

The return values and their content and actions are as shown below.

Return value	Content	Corrective measure
2	Command parameter specification error	Modify the command parameter and try again.
4	Installation information file specification error	Modify the format of the installation information file and try again.
34	Doubly execution error	If <b>Uninstallation and Management (middleware)</b> is running, terminate and try again. Also, make sure the following process is not running. [Windows] run.exe [UNIX] run.sh

Return value	Content	Corrective measure
		If the process mentioned above is running, installation or uninstallation of the product is running. Wait until the termination of the process, then try again.
35	Inconsistent installation error	Start the <b>Uninstallation and Management (middleware)</b> , solve the inconsistent problem and try again.
36	Silent installation error	Make sure the installation condition in "Installation Conditions and Resource Estimation", Installation Guide, is matched. Also confirm the installation parameter in installation informatin and try again.
Other	Other error	Contact a Fujitsu SE.

## 1.16 sqcMigrationReports.bat(Registered Reports Migration Command)

---

### Function

The registered reports before V13.5.0 (V13.3 or before: Instant report, V13.4/V13.5: Analysis) can be migrated. After migration, these reports will be displayed as "Migration report" category in "My category" in Analysis/Planning.



Do not execute multiple sqcMigrationReports.bat simultaneously.

### Required privileges

The Administrators group user privileges are required.

### Execution environment

This command can be executed on Operation Management Client.

### Syntax

```
<installation directory>\bin\sqcMigrationReports.bat -c console_define -l en
```

### Options

-c console\_define

Specify the console definition name for which the registered reports will be migrated.

-l en

Fixed for English version.

## Return values

Normal termination: 0

Abnormal termination: 1

## Execution results/Output format

Normal termination

The normal completion message will be sent to standard output.

```
(Success):sqcMigrationReports
```

Abnormal termination

An error message will be sent to standard error output:

```
(Error):Message, error number
```

The error numbers, content, and action corresponding to the error messages are as shown below.

Error number	Message	Content	Corrective measure
010	Parameter error.(error detail code)	Parameter specification error	Modify the parameter and try again.
020	Setting error.(error detailcode)	Error of settings	Confirm the message output to the standard output and try again.
100	System error.(error detailcode)	Other error	Collect the maintenance information and contact a Fujitsu SE.

## Usage example

```
C:\Program Files\SystemwalkerSQL-C\bin>sqcMigrationReports.bat -c DefaultConsole  
(Success):sqcMigrationReports
```




# Chapter 2 Starting and Stopping Resident Processes

This chapter explains the resident processes used by Systemwalker Service Quality Coordinator, as well as the methods used to start and stop them.



## 2.1 Manager

### [Windows]

Process	Start and stop methods	Usage
dcm.exe dsa_pdb_writer3.exe dsa_pdb_reader3.exe dsa_listener2.exe dsa_file.exe dsa_tis.exe dsa_cmd.exe dsa_spacemon.exe dsa_logfile.exe dsa_execute.exe dsa_forwarder.exe dsa_telnet.exe dsa_snmp.exe	Start/stop the following service: Systemwalker SQC DCM   <b>Note</b> ..... - When restarting the [Systemwalker SQC DCM] service, do not execute "Restart the service" from the Windows Services window. First execute "Stop the service", then, after waiting a while, execute "Start the service".  - Please start/stop from the cluster environment when registering to the cluster system. .....	The main process is "dcm.exe". Use this process to check whether the other processes are running.  Resident processes that begin with "dsa_" vary according to the operating conditions.
sqcschdle.exe	Start/stop the following service: Systemwalker SQC sqcschdle	This process is started when using "Pull" method communications provided by this product.
tthttpd.exe	Start/stop the following service: Systemwalker SQC tthttpd	This process is started when the policy distribution function is used.  Refer to " <a href="#">2.5 Starting the tthttpd Service/Daemon Automatically</a> " for the method used to start the Systemwalker SQC tthttpd service automatically.

### [UNIX]

Process	Start and stop methods	Usage
dcmd dsa_pdb_writer3 dsa_pdb_reader3 dsa_listener2 dsa_file dsa_tis dsa_cmd	Use the following scripts to start and stop the processes.  To start the processes: /etc/rc2.d/S99ssqcdcm start  To stop the processes: /etc/rc0.d/K00ssqcdcm stop  To stop the processes completely:	The main process is "dcmd". Use this process to check whether the other processes are running.  Resident processes that begin with "dsa_" vary according to the operating conditions.

Process	Start and stop methods	Usage
dsa_spacemon dsa_logfile dsa_execute dsa_forwarder dsa_telnet dsa_snmp	<p>/etc/rc0.d/K00ssqcdcm stop_wait</p> <p> <b>Point</b></p> <p>.....</p> <p>If the stop option (stop) is selected, this command completes without waiting for ending of the process.</p> <p>If the complete stop (stop_wait) is selected, this command sends a finish signal, and completes after ending of running process.</p> <p>When restarting the process, stop the process by using the complete stop option (stop_wait), and after command completion, start option (start) to start the process.</p> <p>.....</p> <p> <b>Note</b></p> <p>.....</p> <p>Please start/stop from the cluster environment when registering to the cluster system.</p> <p>.....</p>	
sqcschdle	<p>Use the following scripts to start and stop the processes.</p> <p>To start the processes:</p> <p>/etc/rc2.d/S99ssqcsch start</p> <p>To stop the process:</p> <p>/etc/rc0.d/K00ssqcsch stop</p>	<p>This process is started when using "Pull" method communications provided by this product.</p>
thttpd	<p>Use the following scripts to start and stop the processes.</p> <p>To start the processes:</p> <p>/opt/FJSVssqc/bin/ssqchttp start</p> <p>To stop the processes:</p> <p>/opt/FJSVssqc/bin/ssqchttp stop</p>	<p>This process is started when the policy distribution function is used.</p> <p>Refer to "<a href="#">2.5 Starting the thttpd Service/Daemon Automatically</a>" for the method used to start the thttpd daemon automatically.</p>

 **Point**

.....

When the operand of start/stop/stop\_wait of the above-mentioned script is omitted and executed, the state of Systemwalker Service Quality Coordinator is displayed.

.....

 **Note**

.....


The defunct process may appear temporarily, but it will disappear automatically and require no user action.

.....


## 2.2 Proxy Manager

---

[Windows]

Process	Start and stop methods	Usage
dcm.exe dsa_forwarder.exe dsa_listener2.exe dsa_file.exe dsa_tis.exe dsa_cmd.exe dsa_spacemon.exe dsa_logfile.exe dsa_execute.exe dsa_telnet.exe dsa_snmp.exe	Start/stop the following service: Systemwalker SQC DCM   <b>Note</b> ..... When restarting the [Systemwalker SQC DCM] service, do not execute "Restart the service" from the Windows Services window.  First execute "Stop the service", then, after waiting a while, execute "Start the service". .....	The main process is "dcm.exe". Use this process to check whether the other processes are running.  Resident processes that begin with "dsa_" vary according to the operating conditions.
thttpd.exe	Start/stop the following service: Systemwalker SQC thttpd	This process is started when Pull mode communications and the policy distribution function are used.  Refer to " <a href="#">2.5 Starting the thttpd Service/Daemon Automatically</a> " for the method used to start the Systemwalker SQC thttpd service automatically.

**[UNIX]**

Process	Start and stop methods	Usage
dcmd dsa_forwarder dsa_listener2 dsa_file dsa_tis dsa_cmd dsa_spacemon dsa_logfile dsa_execute dsa_telnet dsa_snmp	Use the following scripts to start and stop the processes.  To start the processes: /etc/rc2.d/S99ssqcdcm start  To stop the processes: /etc/rc0.d/K00ssqcdcm stop  To stop the processes completely: /etc/rc0.d/K00ssqcdcm stop_wait   <b>Point</b> ..... If the stop option (stop) is selected, this command completes without waiting for ending of the process.  If the complete stop (stop_wait) is selected, this command sends a finish signal, and completes after ending of running process.  When restarting the process, stop the process by using the complete stop option (stop_wait), and after command completion, start option (start) to start the process. .....	The main process is "dcmd". Use this process to check whether the other processes are running.  Resident processes that begin with "dsa_" vary according to the operating conditions.

Process	Start and stop methods	Usage
tthttpd	<p>Use the following scripts to start and stop the processes.</p> <p>To start the processes:</p> <pre>/opt/FJSVssqc/bin/ssqchttp start</pre> <p>To stop the processes:</p> <pre>/opt/FJSVssqc/bin/ssqchttp stop</pre>	<p>This process is started when Pull mode communications and the policy distribution function are used.</p> <p>Refer to "<a href="#">2.5 Starting the tthttpd Service/Daemon Automatically</a>" for the method used to start the tthttpd daemon automatically.</p>

 **Point**


When the operand of start/stop/stop\_wait of the above-mentioned script is omitted and executed, the state of Systemwalker Service Quality Coordinator is displayed.

 **Note**


The defunct process may appear temporarily, but it will disappear automatically and require no user action.

## 2.3 Agent

### [Windows]

Process	Start and stop methods	Usage
dcm.exe dsa_forwarder.exe dsa_file.exe dsa_tis.exe dsa_cmd.exe dsa_spacemon.exe dsa_logfile.exe dsa_reg3.exe dsa_openreg.exe dsa_execute.exe	<p>Start/stop the following service: Systemwalker SQC DCM</p> <p> <b>Note</b></p> <p>When restarting the [Systemwalker SQC DCM] service, do not execute "Restart the service" from the Windows Services window.</p> <p>First execute "Stop the service", then, after waiting a while, execute "Start the service".</p>	<p>The main process is "dcm.exe". Use this process to check whether the other processes are running.</p> <p>Processes that begin with "dsa_" may not remain resident under certain operating conditions.</p>
tthttpd.exe	<p>Start/stop the following service: Systemwalker SQC tthttpd</p>	<p>This process is started when Pull mode communications and the policy distribution function are used.</p> <p>Refer to "<a href="#">2.5 Starting the tthttpd Service/Daemon Automatically</a>" for the method used to start the Systemwalker SQC tthttpd service automatically.</p>

### [UNIX]

Process	Start and stop methods	Usage
dcmd dsa_forwarder dsa_file dsa_tis dsa_cmd dsa_spacemon dsa_logfile dsa_execute	<p>Use the following scripts to start and stop the processes.</p> <p>To start the processes:  <code>/etc/rc2.d/S99ssqcdcm start</code></p> <p>To stop the processes:  <code>/etc/rc0.d/K00ssqcdcm stop</code></p> <p>To stop the processes completely:  <code>/etc/rc0.d/K00ssqcdcm stop_wait</code></p> <p> <b>Point</b></p> <p>.....</p> <p>If the stop option (stop) is selected, this command completes without waiting for ending of the process.</p> <p>If the complete stop (stop_wait) is selected, this command sends a finish signal, and completes after ending of running process.</p> <p>When restarting the process, stop the process by using the complete stop option (stop_wait), and after command completion, start option (start) to start the process.</p> <p>.....</p>	<p>The main process is "dcmd". Use this process to check whether the other processes are running.</p> <p>Resident processes that begin with "dsa_" vary according to the operating conditions.</p>
thttpd	<p>Use the following scripts to start and stop the processes.</p> <p>To start the processes:  <code>/opt/FJSVssqc/bin/ssqchttp start</code></p> <p>To stop the processes:  <code>/opt/FJSVssqc/bin/ssqchttp stop</code></p>	<p>This process is started when Pull mode communications and the policy distribution function are used.</p> <p>Refer to "<a href="#">2.5 Starting the thttpd Service/Daemon Automatically</a>" for the method used to start the thttpd daemon automatically.</p>

 **Point**

.....

When the operand of start/stop/stop\_wait of the above-mentioned script is omitted and executed, the state of Systemwalker Service Quality Coordinator is displayed.

.....

 **Note**

.....


The defunct process may appear temporarily, but it will disappear automatically and require no user action.

.....


## 2.4 Enterprise Manager


---

[Windows]

Process	Start and stop methods	Usage
dcm.exe dsa_pdb_writer3.exe dsa_pdb_reader3.exe dsa_listener2.exe dsa_file.exe dsa_tis.exe dsa_cmd.exe dsa_spacemon.exe dsa_logfile.exe dsa_execute.exe	<p>Start/stop the following service: Systemwalker SQC DCM</p> <p> <b>Note</b></p> <p>.....</p> <ul style="list-style-type: none"> <li>- When restarting the [Systemwalker SQC DCM] service, do not execute "Restart the service" from the Windows Services window. First execute "Stop the service", then, after waiting a while, execute "Start the service".</li> <li>- Please start/stop from the cluster environment when registering to the cluster system.</li> </ul> <p>.....</p>	<p>The main process is "dcm.exe". Use this process to check whether the other processes are running.</p> <p>Resident processes that begin with "dsa_" vary according to the operating conditions.</p>
thttpd.exe	<p>Start/stop the following service: Systemwalker SQC thttpd</p>	<p>This process is started when the policy distribution function is used.</p> <p>Refer to "<a href="#">2.5 Starting the thttpd Service/Daemon Automatically</a>" for the method used to start the Systemwalker SQC thttpd service automatically.</p>

**[UNIX]**

Process	Start and stop methods	Usage
dcmd dsa_pdb_writer3 dsa_pdb_reader3 dsa_listener2 dsa_file dsa_tis dsa_cmd dsa_spacemon dsa_logfile dsa_execute	<p>Use the following scripts to start and stop the processes.</p> <p>To start the processes: /etc/rc2.d/S99ssqcdcm start</p> <p>To stop the processes: /etc/rc0.d/K00ssqcdcm stop</p> <p>To stop the processes completely: /etc/rc0.d/K00ssqcdcm stop_wait</p> <p> <b>Point</b></p> <p>.....</p> <p>If the stop option (stop) is selected, this command completes without waiting for ending of the process.</p> <p>If the complete stop (stop_wait) is selected, this command sends a finish signal, and completes after ending of running process.</p> <p>When restarting the process, stop the process by using the complete stop option (stop_wait), and after</p>	<p>The main process is "dcmd". Use this process to check whether the other processes are running.</p> <p>Resident processes that begin with "dsa_" vary according to the operating conditions.</p>

Process	Start and stop methods	Usage
	command completion, start option (start) to start the process. .....  <b>Note</b> ..... Please start/stop from the cluster environment when registering to the cluster system. .....	
thttpd	Use the following scripts to start and stop the processes. To start the processes: /opt/FJSVssqc/bin/ssqchttp start To stop the processes: /opt/FJSVssqc/bin/ssqchttp stop	This process is started when the policy distribution function is used. Refer to " <a href="#">2.5 Starting the thttpd Service/Daemon Automatically</a> " for the method used to start the thttpd daemon automatically.

 **Point**

.....  
 When the operand of start/stop/stop\_wait of the above-mentioned script is omitted and executed, the state of Systemwalker Service Quality Coordinator is displayed.  
 .....

 **Note**

.....  
 The defunct process may appear temporarily, but it will disappear automatically and require no user action.  
 .....

## 2.5 Starting the thttpd Service/Daemon Automatically

This section explains the procedure for starting the thttpd service/daemon when both the policy distribution function and communications using the "Pull" method are to be used.

### Required privileges

**[Windows]**

The user must have the privileges of a member of the Administrators group

**[UNIX]**

The user must have system administrator (superuser) privileges.

### Procedure

**[Windows]**

1. Select [Administrative Tools] and then [Services] from the Control Panel.
2. Select [Systemwalker SQC thttpd], and then open the [Properties] window.
3. In the [General] tab, change the [Startup type] to [Automatic].

**[UNIX]**

Set up a startup script by executing the following commands:

```
# cd /etc/rc2.d  
# ln -s /opt/FJSVssqc/bin/ssqhttp S99ssqhttp
```

Set up a stop script by executing the following commands:

```
# cd /etc/rc0.d  
# ln -s /opt/FJSVssqc/bin/ssqhttp K00ssqhttp
```



# Chapter 3 Resource Configuration Information(MiddlewareConf.xml)

The resource configuration information file is in XML format.

This file is created automatically when the sqcRPolicy command or the sqcCtrlPolicy.exe -e RP command is executed. For details on these commands, refer to "1.1.1 sqcRPolicy (Server Resource Information Collection Policy Creation Command)" or "1.1.7 sqcCtrlPolicy (Remote Policy Operation Command)".

However, after the resource configuration information file has been created with this command, it is possible to delete managed objects by editing the contents of the file. Edit the file when it is necessary to do so.

The file can be easily edited with the XML editor that can be found in the following directory of the Systemwalker Service Quality Coordinator DVD-ROM:

## Storage location

```
<DVD-ROM>
|
+-tools
|
+-xml
|
+-OpeneXeed.exe
```



Before attempting to edit the configuration information file, always make a backup of the original file by renaming it. The original file will be needed to restore managed objects that have been deleted.

The method used to edit MiddlewareConf.xml is explained below.

## 3.1 Storage Location

The storage location of the configuration information file is as follows:

[Windows]

```
<Variable file storage directory>\control\MiddlewareConf.xml
```

[UNIX]

```
/etc/opt/FJSVssqc/MiddlewareConf.xml
```

## 3.2 Editing MiddlewareConf.xml

### Definition details

This file is created automatically when the sqcRPolicy command or the sqcCtrlPolicy.exe -e RP command is executed. For details on these commands, refer to "1.1.1 sqcRPolicy (Server Resource Information Collection Policy Creation Command)" or "1.1.7 sqcCtrlPolicy (Remote Policy Operation Command)".

The contents of the file are defined in XML format according to the operating system and middleware products that are detected automatically when this command is executed.

The following table lists the tag information that is defined in MiddlewareConf.xml.


Tag name	Management target
cpNetwork	Systemwalker Resource Coordinator(Network) information
Interstage	Interstage Application Server information
Interstage_Txn	Interstage transaction breakdown analysis information
TxnAnalysisSync	Transaction breakdown analysis (Synchronous)
TxnAnalysisAsync	Transaction breakdown analysis (Asynchronous)
TxnAnalysisOssJava	Open Java Framework performance information
Symfoware	Symfoware Server information
SRC_Storage	Systemwalker Resource Coordinator(Storage)/ETERNUS SF Storage Cruiser information
OperationMgr	Systemwalker Operation Manager information
SAP	SAP NetWeaver information

### Edit method

Edit this file to remove any of the managed objects defined in it. To remove a managed object, delete all the resource information enclosed by the tags relating to the relevant middleware.

The key steps in using the XML editor on the Service Quality Coordinator CD-ROM to edit the configuration information file are as follows:

- Check each tag in the tree of the XML editor (View:XML Structure).
- To define an attribute, select the tag to be edited on the tree and then double-click the attribute name to be defined in its displayed location (View:XML Data). Alternatively, an attribute can also be defined by using the **Edit Attributes** window displayed, clicking the right mouse button, and selecting **Edit** from the context menu that appears.
- Individual tags can be added easily by using **Copy** and **Paste** from the **Edit** menu or by using **Duplicate** or **Copy/Paste** from the right-click context menu.

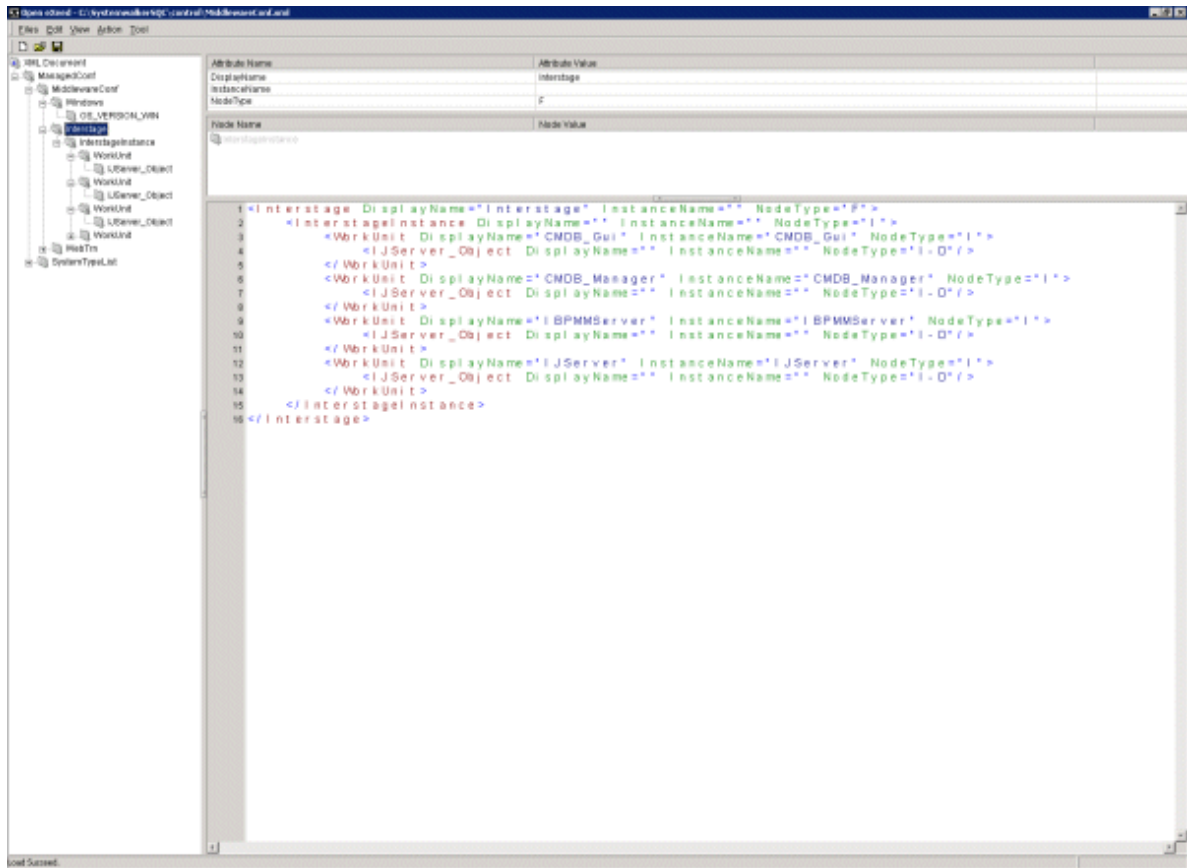

### Note

With regard to Systemwalker Resource Coordinator information, all information will be collected as long as each tag is present. Even if part of the information enclosed by tags is deleted, the change will not be applied to the managed object.

### Point

To restore management of a middleware product that has been deleted, copy the relevant section from the backup of the original configuration information file to the current configuration information file.

# Chapter 4 Data Formats

This section lists the configuration information that is stored in the PDB.

## Note

A minus value might be displayed for items that fluctuate.

For example, if an item that described as "pages freed" in the "description" column has minus value, that means "pages allocated".

## 4.1 Summary Information

This is the information that is displayed in the **Summary** view of the **Console** window.

## Point

- The record numbers and field names used in threshold monitoring are shown in the "Record No." and "Field Name" columns, respectively, in the following tables.
- Monitor information is collected at the different intervals depending on information.
- In the following explanation, the fields where <Windows>, <Solaris>, etc appears in the "Description" column are specific to the operating system or CPU enclosed in <>.

## Note

- It is not possible to display text information.
- In the monitor display of the console, it is not because all information shown here is displayed. There might be information not used for the display of the calculation result of two or more information, and the display.

Explains at each monitor.

### 4.1.1 UserResponseMonitor

Collection interval is 10 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_USERRES	F1004	wElapsedTime	BrowserAgent	seconds	The time taken to display a Web page
			wAgent	BrowserAgent		Agent name

### 4.1.2 ServiceAvailMonitor

Either 1, 2, 5, or 10 (minutes) can be specified for collection interval.

Refer to "Service Operation Management" in the *User's Guide* for setting procedure.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_SERVICERES	F1005	HTTPResponse	swmprototyping	mseconds	Operational status of HTTP/DNS/SMTP services and ports. <ul style="list-style-type: none"> <li>- HTTP/DNS/SMTP services 0 or greater: Operating (response time)</li> <li>-1: Stopped</li> <li>- Port 0: Operating</li> <li>-1: Stopped</li> </ul>

### 4.1.3 WebTrnMonitor

#### Note

- When s-elapsed is not set by the Format sentence of the transaction log definition file, the data of field "selapse" is not collected.
- When s-bytes is not set by the Format sentence of the transaction log definition file, the data of field "traffic" is not collected.

Collection interval is 10 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_TLA	F1020	hitserver	tlawatch	times	Number of server hits (total)
			hitclient	tlawatch	times	Number of client hits (total)
			hitremote	tlawatch	times	Number of remote hits (total)
			selapse	tlawatch	seconds	Required time (max)
			traffic	tlawatch	Kbytes	Traffic volume (total)
			serror	tlawatch	times	Number of errors (total)
			serrorfmt	tlawatch	times	Number of format errors (total)

### 4.1.4 ServerMonitor

Collection interval for agents for Agent-based Monitoring is 1 minute, and for agents for Agentless Monitoring is 5 minutes.


#### Note

- Data of the [SUM\_MEM] record might have fields without values when the command result is not returned because of the temporary high system load, however, this is not a problem if it does not occur too frequently.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_PROC	1052	usrproc	OS	percent	CPU usage in user mode
			sysproc	OS	percent	CPU usage in system mode
			intproc	OS	percent	Unix: Percentage of the time spent waiting for I/O to complete within the unit time <AIX, HP-UX, Linux sysstat-5, Solaris>  Windows: Percentage of the time spent waiting for I/O to be interrupted within the unit time
			totproc	OS	percent	Total CPU usage
summary_data	SUM_MEM	1053	freemem	OS	bytes	Available memory
			pagins	OS	pages	The number of pages that have been paged-in <Solaris>
					Kbytes	The size of pages that have been paged-in <Linux>
			pagflts	OS	faults	Page fault count <HP-UX, Solaris, Windows>
			swapped	OS	percent	The percentage of swap or page files currently in use
			pagouts	OS	pages	The number of pages that have been paged out <Solaris>
Kbytes	The size of pages that have been paged out <Linux>					
summary_data	SUM_DISK	1054	dskreads	OS	reads	Number of disk reads <Linux, Solaris, Windows>  Number of disk reads + writes <AIX, HP-UX>
			dskwrits	OS	writes	Number of disk writes <Linux, Solaris, Windows>
			kbread	OS	Kbytes	The number of disk reads per kilobyte <AIX, Linux, Solaris, Windows>  The number of disk reads per kilobyte + writes per kilobyte <HP-UX>
					Kbytes	The number of disk writes per kilobyte <AIX, Linux, Solaris, Windows>
			dsksrvtim	OS	milliseconds	Read/write service time
			dskwaittim	OS	milliseconds	Time spent waiting for read/write operations

#### 4.1.5 ZoneMonitor/ZoneStackMonitor/ZoneStackMonitor(All)

Collection interval is 1 minute.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_ZONE	1088	zsummem	prstat - Z	percent	Zone % memory used <Solaris 10>
			zsumcpu	prstat - Z	percent	Zone % CPU used <Solaris 10>   <b>Point</b> ..... Information on the process that ended between interval is not included. Therefore, it is likely to become a value that is lower than an actual CPU use rate.  When bind is done to the processor set and the Solaris zone is used, CPU use rate becomes the unit of the processor set with 100%. .....
			zsumname	prstat - Z	text	Zone name <Solaris 10>

#### 4.1.6 Interstage(EJB)Monitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_I_SPEJB APL	F1007	eMaxReqTime	ispreport -k EJBAPL	mseconds	Maximum processing time (during the sampling interval) for monitored methods in the thread
			eMaxWaitTime	ispreport -k EJBAPL	mseconds	Maximum time (during the sampling interval) that a request spent waiting from the time it was received from the client application until the method started processing
			eReqNum	ispreport -k EJBAPL	number	Number of processes for the EJB application that accumulated during the sampling interval
			eWaitNum	ispreport -k EJBAPL	number	Maximum number of requests (during the sampling interval) to the EJB application that had to wait to be processed. For "Message-drive Bean" EJB applications, this is always "0".

#### 4.1.7 Interstage(TD)Monitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_ISPTDOBJ	F1006	tMaxReqTime	ispreport-kTDOBJ	mseconds	Maximum time (during the sampling interval) taken for the process to process an operation
			tMaxWaitTime	ispreport-kTDOBJ	mseconds	Maximum time (during the sampling interval) that a request spent waiting from the time it was received from the client application until the processing by the server application started
			tReqNum	ispreport-kTDOBJ	number	Number of processes for the object that have been accumulated since performance monitoring started
			tWaitNum	ispreport-kTDOBJ	number	Maximum number of requests (during the sampling interval) to the object that had to wait to be processed

#### 4.1.8 Interstage(CORBA)Monitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_ISPIMPLID	F1008	iMaxReqTime	ispreport-kIMPLID	mseconds	Maximum time (during the sampling interval) taken for an operation in the thread to be processed
			iMaxWaitTime	ispreport-kIMPLID	mseconds	Maximum time (during the sampling interval) spent waiting from the time that a request was received from the client application until the object started processing
			iReqNum	ispreport-kIMPLID	number	Number of processes for the object that accumulated during the sampling interval
			iWaitNum	ispreport-kIMPLID	number	Maximum number of requests (during the sampling interval) to the object that had to wait to be processed

#### 4.1.9 Interstage(IJServer)Monitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_ISJMXJVM	F1029	isjmxjheapavg	jmxif	number	Average current heap usage (per Work Unit)
			isjmxjheapmax	jmxif	number	Maximum current heap usage (per Work Unit)



## 4.1.10 Interstage(IJServer Cluster)Monitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_IS_JM X_JA VAEE _JVM	F1058	isjmxjheapavg	isjmx	number	Average current heap usage (per Server Instance)
			isjmxjvmprm	isjmx	number	Current value of heap usage of current Perm area (per Server Instance)
			isjmxgbcnt	isjmx	number	Number of garbage collections (per Server Instance)

## 4.1.11 TxnSyncMonitor

Collection interval is 10 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_TDAS YNC	F1030	trxsync	Log	number	transaction num
			avgtimsync	Log	second	transaction average execution time
			maxtimsync	Log	second	transaction max execution time

## 4.1.12 TxnAsyncMonitor

Collection interval is 10 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_TDAA SYNC	F1031	trxasync	Log	number	transaction num
			avgtimasync	Log	second	transaction average execution time
			maxtimasync	Log	second	transaction max execution time

## 4.1.13 TxnOssJavaMonitor

Collection interval is 10 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_TDAO SSJAV A	F1057	trxossjava	Log	number	transaction num
			avgtimossjava	Log	second	transaction average execution time
			maxtimossjava	Log	second	transaction max execution time

## 4.1.14 WebLogicServerMonitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_WL_JMX_AVAE_E_JVM	F1059	wljsxjheapavg	wljsx	byte	Average current heap usage (per management server or managed server)
			wljsxgbcnt	wljsx	number	Number of garbage collections (per management server or managed server)

#### 4.1.15 MS-.NET\_Monitor

Collection interval is 1 minute.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_ASP_NET	1106	reqqd	MS.NET	number	The number of requests waiting to be processed
			apprst	MS.NET	number	Number of times the application has been restarted
			wprestrt	MS.NET	number	Number of times a worker process has restarted on the machine
			errtot	MS.NET	number	Total number of errors occurred
			reqsec	MS.NET	number	The number of requests executed during the collection period

#### 4.1.16 SymfowareMonitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_RDBSAR	F1009	ebHitRate	rdbsar - e -b		The percentage of times that the page accessed has been in the buffer
			Alarm	rdbsar - e -b		Number of times that a critical rate has been reached
			DryUp	rdbsar - e -b		Number of times that the buffer has been used up
summary_data	SUM_RDBPS	F1010	TOTALEXEC	rdbps - s/sp	number	Number of times SQL statements have been executed
			rDeadLock	rdbps -r	number	Number of times the process has deadlocked
			rLockWait	rdbps -r	number	Number of times the process has had to wait for exclusive use of resources

#### 4.1.17 OracleMonitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_ORAIO	F1011	blkget	Oracle		Number of database blocks allocated
			phyread	Oracle	number	Number of physical reads
			congets	Oracle	number	Consistent gets (consistent reads)
summary_data	SUM_ORAQUE	F1012	enqwt	Oracle	number	Number of enqueue waits
			enqddlks	Oracle	number	Number of enqueue deadlocks

#### 4.1.18 MS-SQL\_Monitor

Collection interval is 1 minute.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_SQLS	1107	bmbch	MSSQL	percent	Buffer Cache Hits
			dbtra	MSSQL	transactions	Transactions
			lolws	MSSQL	waits	Lock Waits
			lodlk	MSSQL	deadlocks	Number of Deadlocks
			accfss	MSSQL	scans	Full Scans

#### 4.1.19 OperationMgrMonitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_JLA	F1021	maxjobsum	dsajla	jobs	Number of concurrent jobs
			maxothjobsum	dsajla	jobs	Number of concurrent network/load distribution jobs (that were received)
			maxwjobsum	dsajla	jobs	Number of jobs awaiting execution
summary_data	SUM_JLA2	F1056	jobnumsum	dsajla	jobs	Number of completed jobs
			errorjobnumsum	dsajla	jobs	Number of error jobs

#### 4.1.20 TcpNetworkMonitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_NET1	F1002	Opkts	Tcpstat	number	Number of packets sent
			Osize	Tcpstat	number	Size of packets sent
			Ipkts	Tcpstat	number	Number of packets received

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			Isize	Tcpstat	Number	Size of packets received
			Odup	Tcpstat	Percent	Resend rate (percentage of connections in which an error has been detected)
			Idup	Tcpstat	Percent	Duplicated reception rate (percentage of connections in which an error has been detected)
			Ilost	Tcpstat	Percent	Packet loss rate (percentage of connections in which an error has been detected)
summary_data	SUM_NET2	F1003	Town	Tcpstat	Number	Number of times a problem with the local node has been recognized and output to syslog
			Tnei	Tcpstat	Number	Number of times a problem with the network (including the adjacent network) has been recognized and output to syslog
			Tnet	Tcpstat	Number	Number of times a problem with the (non-adjacent) network has been recognized and output to syslog
			Trem	Tcpstat	Number	Number of times a problem with the other node (or the network connected to it) has been recognized and output to syslog

#### 4.1.21 StorageMonitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_SSCRG_READ	F1022	riops	sc_per_f_stat	IO/s	Highest read I/O count in LV in RAIDGroup
			rthruput	sc_per_f_stat	MB/s	Highest read throughput value in LV in RAIDGroup
			rrestime	sc_per_f_stat	Msec	Highest read response time in LV in RAIDGroup
			rcrate	sc_per_f_stat	Percent	Lowest read cache hit rate in LV in RAIDGroup
			rpricrate	sc_per_f_stat	Percent	Value whose READ Prifetticasshuhit rate is the largest in LV in RAIDGroup.
summary_data	SUM_SSCRG_WRITE	F1023	wiops	sc_per_f_stat	IO/s	Highest write I/O count in LV in RAIDGroup
			wthruput	sc_per_f_stat	MB/s	Highest write throughput value in LV in RAIDGroup
			wrestime	sc_per_f_stat	Msec	Highest write response time in LV in RAIDGroup
			wcrate	sc_per_f_stat	Percent	Lowest write cache hit rate in LV in RAIDGroup
			puserate	sc_per_f_stat	Percent	Average disk usage rate in disks in RAIDGroup

## 4.1.22 SAP Monitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_R3ENQ	F1034	R3sumenqreq	SAPCCMS	Request/sec	Number of enqueue requests (enqueue operations)
			R3sumdeqreq	SAPCCMS	Request/sec	Number of dequeue requests
			R3sumquelen	SAPCCMS	Percent	Percentage of queue length
summary_data	SUM_R3DIALOG	F1035	R3sumdiareasp	SAPCCMS	Msec	Dialog response time
			R3sumdiastep	SAPCCMS	Steps/min	Number of dialog steps
summary_data	SUM_R3BACKGROUND	F1036	R3sumbgutil	SAPCCMS	Percent	Background process load rate
summary_data	SUM_R3RFC	F1037	R3sumrfctcall	SAPCCMS	Calls/sec	Number of received tRFC/qRFC calls waiting to be executed on local system

## 4.1.23 ROR(VMPool)Monitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_VMPOOLCPU	F1061	vmppoolprocpcent	ROR	percent	CPU usage rate for VM pool
			vmppoolproc	ROR	GHz	CPU usage for VM pool
			vmppoolproctenant	ROR	name	Name of tenant to which VM pool belongs
summary_data	SUM_VMPOOLMEM	F1062	vmppoolmempcent	ROR	percent	Memory usage rate for VM pool
			vmppoolmem	ROR	GByte	Memory usage for VM pool
			vmppoolmemtenant	ROR	name	Name of tenant to which VM pool belongs

## 4.1.24 ROR(StoragePool)Monitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_STORAGEPOOL	F1063	storagepoolpercent	ROR	percent	Usage rate for storage pool
			storagepoolusage	ROR	GByte	Usage for storage pool
			storagepooltenant	ROR	name	Name of tenant to which storage pool belongs

#### 4.1.25 ROR(NetworkPool)Monitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_NETWORKPOOL	F1064	networkpoolpercent	ROR	percent	Usage rate for network pool
			networkpoolusage	ROR	number	Number of used network pool addresses
			networkpooltenant	ROR	name	Name of tenant to which network pool belongs

#### 4.1.26 ROR(ServerPool)Monitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_SERVERPOOL	F1065	serverpoolpercent	ROR	percent	Usage rate for server pool
			serverpoolusage	ROR	number	Number of used server pools
			serverpooltenant	ROR	name	Name of tenant to which server pool belongs

#### 4.1.27 ROR(AddressPool)Monitor

Collection interval is 5 minutes.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_ADDRESSPOOL	F1066	addresspoolpercent	ROR	percent	Usage rate for address pool
			addresspoolusage	ROR	number	Number of used address pools
			addresspooltenant	ROR	name	Name of tenant to which address pool belongs

#### 4.1.28 VMware(Virtual)StackMonitor

Collection interval is 5 minutes.

This is performance information for VMware ESX and VMware ESXi.

The data format is the same for https and ssh, but the collected items are different. Information with <ssh> in the "Description" column is only collected in ssh, and is not collected in https.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_VMWVPRO	1209	usrproc	(*)	percent	Percentage of the physical CPU used by each virtual machine
			vsysproc	(*)	percent	Percentage of the time that CPU of each virtual machine was consumed in ESX/ESXi Vmkernel.
			ready	(*)	percent	Percentage of the time of waiting for CPU allocation of each virtual machine
			run	(*)	percent	Percentage of the scheduled time of each virtual machine
			vmw_proc_name	(*)	name	Virtual machine name
summary_data	SUM_VMWVMEM	1207	activemem	(*)	Mbytes	Memory usage of each virtual machine
			pagcins	(*)	pages	Commit pages of each virtual machine <ssh>
			swread	(*)	Mbytes	Memory size swapped in of each virtual machine
			swritn	(*)	Mbytes	Memory size swapped out of each virtual machine
			vswapused	(*)	percent	Memory size swapped of each virtual machine
			vmw_mem_name	(*)	name	Virtual machine name
summary_data	SUM_VMWVDISK	1208	vdskreads	(*)	reads	Number of disk reads of each virtual machine
			vdskwrits	(*)	writes	Number of disk writes of each virtual machine
			mbread	(*)	Mbytes	Size of reading disk of each virtual machine
			mbwritn	(*)	Mbytes	Size of writing disk of each virtual machine
			vdsksrvtim	(*)	millisec	Average waiting time of ESX Server Vmkernel of each virtual machine <ssh>
			vdskwaittim	(*)	millisec	Average waiting time of virtual machine operating system of each virtual machine <ssh>
			vmw_dsk_name	(*)	name	Virtual machine name

(\*)

For https: SOAP API

For ssh : esxtop

## 4.1.29 VMware(Physical)Monitor

Collection interval is 5 minutes.

This is performance information for VMware ESX and VMware ESXi.

The data format is the same for https and ssh, but the collected items are different. Information with <ssh> in the "Description" column is only collected in ssh, and is not collected in https.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_VMWP_PROC	1220	pcuser	(*)	percent	Percentage of CPU user time reported with service console <ssh>
			pcsystemtime	(*)	percent	Percentage of CPU system time reported with service console <ssh>
			pconwait	(*)	percent	Percentage of CPU waiting time reported with service console <ssh>
			pctottime	(*)	percent	Average CPU usage rate of physical CPU
summary_data	SUM_VMWP_MEM	1221	pmfree	(*)	Mbytes	Free memory size of physical server
			pmused	(*)	Mbytes	Physical memory size of physical server
			pmswused	(*)	Mbytes	Swap size of physical server
			pmswact	(*)	Mbytes	Total memory size of Swap in and swap out of physical server
summary_data	SUM_VMWP_DISK	1222	pdskreads	(*)	reads	Number of disk reads
			pdskwrits	(*)	writes	Number of disk writes
			pmbread	(*)	Mbytes	Size of disk reads
			pmbwritn	(*)	Mbytes	Size of disk writes
			pdsksrvtim	(*)	millisec	Average waiting time of read/write of ESX/ESXi Server Vmkernel
			pdskwaittim	(*)	millisec	Average waiting time of read/write of virtual machine operating system
			pname_disk	(*)	name	Device name (It will be a blank column for this field because the data of this field is not collected.)

(\*)

For https: SOAP API

For ssh : esxtop

## 4.1.30 VMware(Cluster)Monitor

Collection interval is 5 minutes.

This is performance information for VMware vCenter.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_VMW_CLUST	1236	clcpuusage	SOAP API	MHz	Usage of CPUs actively used by all virtual machines in the cluster (MHz)



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
	ERCPU		clusecpupcentage	SOAP API	percent	Usage rate of CPUs actively used by all virtual machines in the cluster (%)
			cltotalcpu	SOAP API	MHz	Amount of CPU allocated in the cluster
summary_data	SUM_VMWCLUSTERMEM	1237	clconsumedmem	SOAP API	MBytes	Memory usage of the power-on hosts in the cluster
			cloverheadmem	SOAP API	MBytes	Amount of overhead memory in the cluster
			clusemempcent	SOAP API	percent	Memory usage rate (%) in the cluster
			cltotalmemory	SOAP API	MBytes	Amount of memory allocation in the cluster

### 4.1.31 VMware(ResourcePool)Monitor

Collection interval is 5 minutes.

This is performance information for VMware vCenter.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_VMWPOOLCPU	1238	rscpuusage	SOAP API	MHz	CPU usage for Resource pool
			rscpulimit	SOAP API	MHz	CPU limit of resource pool The value of -1 means no limitation.
			rscpuresv	SOAP API	MHz	CPU reservation of resource pool
summary_data	SUM_VMWPOOLMEM	1239	rsmemusage	SOAP API	MBytes	Memory usage for resource pool
			rsmemswapped	SOAP API	MBytes	Amount of swapped memory in resource pool. Not collected in case of VMware vCenter 5.0 and later
			rsmemlimit	SOAP API	MBytes	Memory limit of resource pool. -1 means no limitation.
			rsmemresv	SOAP API	MBytes	Amount of memory reservation of resource pool

### 4.1.32 HyperV(Virtual)StackMonitor

Collection interval is 5 minutes for agents of Agentless Monitoring Agent. Collection interval is 1 minute for other kind agents.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_HVVPROC	1219	pgrts	registry	percent	Usage rate at total processor time consumed by parent OS of virtual machine and guest code of virtual machine

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			phrts	reg typeper f	percent	Usage rate at total processor time consumed by parent OS of virtual machine and Hypervisor code of virtual machine
			ptrts	reg typeper f	percent	Usage rate at total processor time consumed by parent OS of virtual machine and guest code and Hypervisor code of virtual machine
summary_data	SUM_HVVMEM	1252	ppmdmvms	reg typeper f	Mbytes	Current memory capacity of virtual machine <Windows Server 2008 R2 SP1 or later>
			pgvpmdivms	reg typeper f	Mbytes	Memory capacity displayed by virtual machine <Windows Server 2008 R2 SP1 or later>

### 4.1.33 HyperV(Physical)Monitor

Collection interval is 5 minutes for agents of Agentless Monitoring Agent. Collection interval is 1 minute for other kind agents.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_HVPPROC	1223	pgrtsp	typeper f	percent	Usage rate at total processor time consumed by guest code of physical computer
			phrtsp	typeper f	percent	Usage rate at total processor time consumed by Hypervisor code of physical computer
			ptrtsp	typeper f	percent	Usage rate at total processor time consumed by guest code and Hypervisor code of physical computer

### 4.1.34 KVM(Virtual)StackMonitor

Collection interval is 5 minutes for agents of Agentless Monitoring Agent. Collection interval is 1 minute for other kind agents.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_KVMVPROC	1267	kvmcpupcent	virt-top	percent	CPU utilization of domain
			kvmcpudomainname	virt-top	name	Domain name
summary_data	SUM_KVMVMEM	1268	kvmmemused	virt-top	MBytes	Memory utilization of domain
			kvmmemmax	virt-top	MBytes	Amount of memory allocation of domain
			kvmmempercent	virt-top	percent	Rate of use of memory of domain

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			kvmmemdomainname	virt-top	name	Domain name
summary_data	SUM_KVM_VDISK	1269	kvmdiskblockrby	virt-top	bytes	Amount of reads of virtual block device of domain
			kvmdiskblockwby	virt-top	bytes	Amount of writes of virtual block device of domain
			kvmdiskdomainname	virt-top	name	Domain name

### 4.1.35 Xen(Virtual)StackMonitor

Collection interval is 5 minutes for agents of Agentless Monitoring Agent. Collection interval is 1 minute for other kind agents.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_XENV_PROC	1226	cpubusy	xentop	percent	CPU utilization of domain
			xen_proc_name	xentop	name	Domain name
summary_data	SUM_XENV_MEM	1227	memav	xentop	Mbytes	Memory utilization of domain
			memavp	xentop	percent	Rate of use of memory of domain
			xen_mem_name	xentop	name	Domain name
summary_data	SUM_XENV_DISK	1228	ooc	xentop	number	Demand frequency to virtual block device of domain except read/wite.
			vdrds	xentop	number	Reading frequency of virtual block device of domain
			vdwrts	xentop	number	Writing frequency of virtual block device of domain
			xen_dsk_name	xentop	name	Domain name

### 4.1.36 ZoneMonitor

Collection interval is 5 minutes for agent of Agentless Monitoring Agent. Collection interval is 1 minute for other king agents.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_ZONE_PROC	1230	zonecpuused	zonestat	second	Solaris zone CPU time <Solaris 11>
			zonecpupct	zonestat	percent	Solaris zone % CPU used <Solaris 11>
			zonecpuzonename	zonestat	name	Zone name <Solaris 11>
summary_data	SUM_ZONE_MEM	1231	zonepmemused	zonestat	Kbytes	Solaris zone physical memory used <Solaris 11>

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			zonepmpct	zonestat	percent	Solaris zone % physical memory used <Solaris 11>
			zonememzonename	zonestat	name	Zone name <Solaris 11>

### 4.1.37 UserDataMonitor

Collection interval is vary depending on the setting.

Refer to Chapter 8, "Managing User Data" in the *User's Guide* for setting procedure.

There is 20 kinds of user data that can be defined.

Record ID exists from SUM\_UDATA\_1 to SUM\_UDATA\_20.

In the following table, the Record ID is expressed as SUM\_UDATA\_n where n is from 1 to 20.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
summary_data	SUM_UDATA_n	(Note)	smudndata1	sqcPDBload	number	Data specified for col_data_num1 in sqcPDBload data conversion definition file
			smudndata2	sqcPDBload	number	Data specified for col_data_num2 in sqcPDBload data conversion definition file
			smudndata3	sqcPDBload	number	Data specified for col_data_num3 in sqcPDBload data conversion definition file
			smudndata4	sqcPDBload	number	Data specified for col_data_num4 in sqcPDBload data conversion definition file
			smudndata5	sqcPDBload	number	Data specified for col_data_num5 in sqcPDBload data conversion definition file
			smudndata6	sqcPDBload	number	Data specified for col_data_num6 in sqcPDBload data conversion definition file
			smudndata7	sqcPDBload	number	Data specified for col_data_num7 in sqcPDBload data conversion definition file
			smudntxt1	sqcPDBload	text	Data specified for col_data_txt1 in sqcPDBload data conversion definition file

#### Note

Defining the Record No. is necessary when setting the threshold monitoring.

Record ID and corresponding Record No. are as follows.

Record ID	Record No.
SUM_UDATA_1	F1024
SUM_UDATA_2	F1025
SUM_UDATA_3	F1026
SUM_UDATA_4	F1027
SUM_UDATA_5	F1028
SUM_UDATA_6	F1038
SUM_UDATA_7	F1039

Record ID	Record No.
SUM_UDATA_8	F1040
SUM_UDATA_9	F1041
SUM_UDATA_10	F1042
SUM_UDATA_11	F1043
SUM_UDATA_12	F1044
SUM_UDATA_13	F1045
SUM_UDATA_14	F1046
SUM_UDATA_15	F1047
SUM_UDATA_16	F1048
SUM_UDATA_17	F1049
SUM_UDATA_18	F1050
SUM_UDATA_19	F1051
SUM_UDATA_20	F1052

## 4.2 Drilled-Down/Report Information

This information is displayed in the **Drilled-Down** and **Report** views of the **Console** window.

### Point

- The record numbers and field names used in threshold monitoring are shown in the "Record No." and "Field Name" columns, respectively, in the following tables. Note, however, that the Systemwalker Centric Manager performance information (traffic information) shown in "4.2.16 No data/CentricManager reports" and the Systemwalker Network Manager information shown in "4.2.18 No data/Systemwalker Network Manager reports" cannot be used in threshold monitoring.
- Information that is updated at 10-minute intervals is displayed in the **Drilled-Down** and **Report** views, and information that is updated at 60-minute/1,440-minute intervals is displayed in the **Report** view.
- Text information cannot be displayed.
- In the following explanation, the fields where <Windows>, <Solaris>, etc appears in the "Description" column are specific to the operating system or CPU enclosed in <>.

#### [Solaris]

- The performance value of each CPU is collected by the mpstat command and the total CPU performance value is collected by the sar -u command.
- The average performance value of each CPU may not match the total performance value.

There are separate explanations for each of the detailed display tree folders and each type of report. The format of the following headings is "Detailed display tree folder name/report type name":

### 4.2.1 The ResponseCondition folder/End user response reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_twide	WEBSLM_WWW	FJ1024	wPageRef	BrowserAgent		Web page record identifier
			wElapsedTime	BrowserAgent	seconds	The time taken to display a Web page
			wInterruptFlag	BrowserAgent		Display interrupt flag. One of the following: 0 ->Not interrupted  1 ->Interrupted. The end user has either closed the browser or clicked the <b>Stop</b> button or another hyperlink.  2 ->Interrupted. The session has been interrupted by either the proxy server or the network.
			ThinkTime	BrowserAgent	seconds	Reading time. (The time from when the page finished downloading until the user either moved to the next page or closed the browser.)
			wAgent	BrowserAgent		Agent name
			wEndUserID	BrowserAgent		End user identifier
			wBrowser	BrowserAgent		Browser type. "iexplore" -> Microsoft Internet Explorer
			wBrowserID	BrowserAgent		Identifier for the browser instance
			wPageURL	BrowserAgent	URL	URL for the Web page
			wReferringURL	BrowserAgent	URL	If this page was displayed by clicking on a hyperlink in a referring page, then this is the URL for the referring page. This value is not set if this page was specified from the address bar.
			Protocol	BrowserAgent		Protocol used to download the page. One of the following: "HTTP", "HTTPS"
resource_data_twide	WEBSLM_URL	FJ1025	uPageRef	BrowserAgent		This is the Web page record identifier.
			uElapsedTime	BrowserAgent	seconds	This is the time that it took to download the URL, not including the time taken for DNS resolution.
			uSocket	BrowserAgent		The local socket for TCP connections
			uInterruptFlag	BrowserAgent		Download interrupt flag. One of the following: "0" : Not interrupted

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
						"1" : Interrupted. The end user has either closed the browser or clicked the <b>Stop</b> button or another hyperlink.  "2" : Interrupted. The session has been interrupted by either the proxy server or the network.
			ResponseCode	BrowserAgent		The status code for the HTTP response
			RequestSize	BrowserAgent	bytes	Size (in bytes) of the HTTP request
			RespHeaderSize	BrowserAgent	bytes	Size (in bytes) of the HTTP response header
			URLsize	BrowserAgent	bytes	URL size in bytes
			uAgent	BrowserAgent		Agent name
			uEndUserID	BrowserAgent		End user identifier
			uBrowser	BrowserAgent		Browser type. "iexplore" -> Microsoft Internet Explorer
			uBrowserID	BrowserAgent		Identifier for the browser instance
			uPageURL	BrowserAgent	URL	URL for the Web page
			uReferringURL	BrowserAgent	URL	URL for the link source
resource_data_twide	WEBSLM_TCP	FJ1026	tPageRef	BrowserAgent		Web page record identifier
			tElapsedTime	BrowserAgent	seconds	Time taken for connection
			tStatus	BrowserAgent		Connection success or failure. One of the following: "0" -> Successful "1" -> Failed
			tSocket	BrowserAgent		The local socket number for TCP connections
			tAgent	BrowserAgent		Agent name
			tEndUserID	BrowserAgent		End user identifier
			tBrowser	BrowserAgent		Browser type. "iexplore" -> Microsoft Internet Explorer
			tBrowserID	BrowserAgent		Identifier for the browser instance


Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			IP	BrowserAgent		IP address of the connection destination
resource_data_twide	WEBSLM_DNS	FJ1027	dPageRef	BrowserAgent		Web page record identifier
			dElapsedTime	BrowserAgent	seconds	Time taken for DNS resolution
			dStatus	BrowserAgent		Connection success or failure. One of the following: "0" -> Successful "1" -> Failed
			dAgent	BrowserAgent		Agent name
			dEndUserID	BrowserAgent		End user identifier
			dBrowser	BrowserAgent		Browser type. "iexplore" -> Microsoft Internet Explorer
			dBrowserID	BrowserAgent		Identifier for the browser instance
			dURL	BrowserAgent		URL requested

#### 4.2.2 The ServiceCondition folder/HTTP/DNS/SMTP/PORT service reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	PROPING_HTTP	FJ1029	HTTPResponse	swmprotoping	milliseconds	Response time of HTTP service - 0 or greater: Response time - -1: Stopped
			HTTPMax	swmprotoping	milliseconds	Maximum response time of HTTP service Maximum value within data integration interval (10 min/1 hour/24 hours)
			HTTPMin	swmprotoping	milliseconds	Minimum response time of HTTP service Minimum value within data integration interval (10 min/1 hour/24 hours)
			HTTPAvailability	swmprotoping	number	Availability of HTTP service Availability within data integration interval (10 min/1 hour/24 hours) is represented as a value between 0 and 1. Example: - 0: 0 % operating



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
						<ul style="list-style-type: none"> <li>- 0.5: 50 % operating</li> <li>- 1: 100% operating</li> </ul>
resource_data	PROPING_DNS	FJ1030	DNSResponse	swmprotoping	milliseconds	Response time of DNS service <ul style="list-style-type: none"> <li>- 0 or greater: Response time</li> <li>- -1: Stopped</li> </ul>
			DNSMax	swmprotoping	milliseconds	Maximum response time of DNS service  Maximum value within data integration interval (10 min/1 hour/24 hours)
			DNSMin	swmprotoping	milliseconds	Minimum response time of DNS service  Minimum value within data integration interval (10 min/1 hour/24 hours)
			DNSAvailability	swmprotoping	number	Availability of DNS service  Availability within data integration interval (10 min/1 hour/24 hours) is represented as a value between 0 and 1.  Example: <ul style="list-style-type: none"> <li>- 0: 0 % operating</li> <li>- 0.5: 50 % operating</li> <li>- 1: 100 % operating</li> </ul>
resource_data	PROPING_SMTP	FJ1031	SMTPResponse	swmprotoping	milliseconds	Response time of SMTP service <ul style="list-style-type: none"> <li>- 0 or greater: Response time</li> <li>- -1: Stopped</li> </ul>
			SMTPMax	swmprotoping	milliseconds	Maximum response time of SMTP service  Maximum value within data integration interval (10 min/1 hour/24 hours)
			SMTPMin	swmprotoping	milliseconds	Minimum response time of SMTP service  Minimum value within data integration interval (10 min/1 hour/24 hours)
			SMTPAvailability	swmprotoping	number	Availability of SMTP service  Availability within data integration interval (10 min/1 hour/24 hours) is represented as a value between 0 and 1.  Example: <ul style="list-style-type: none"> <li>- 0: 0 % operating</li> <li>- 0.5: 50 % operating</li> <li>- 1: 100 % operating</li> </ul>

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	PROPING_PORT	FJ1032	PORT Availability	swmprototyping	number	Port operating status - 0: Operating - -1: Stopped  <b>Point</b> ..... Because Drilled-Down information takes the average of ten minutes and is processed, it is likely to be displayed by information (information on the decimal point) other than the above-mentioned. .....
			PORT Availability2	swmprototyping	number	Availability of the port Availability within data integration interval (10 min/1 hour/24 hours) is represented as a value between 0 and 1. Example: - 0: 0 % operating - 0.5: 50 % operating - 1: 100 % operating

## 4.2.3 The WebTrn folder/Web transaction reports

### Note

- When s-elapsed is not set by the Format sentence of the transaction log definition file, the data of field "relapse" is not collected.
- When s-bytes is not set by the Format sentence of the transaction log definition file, the data of field "rtraffic" is not collected.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	TLA_REQ	FJ1051	rrequest	tlawatch	times	Number of requests (total)
			relapse	tlawatch	seconds	Required time (max)
			rtraffic	tlawatch	Kbytes	Traffic volume (total)
			rerror	tlawatch	times	Number of errors (total)
			rhitserv	tlawatch	times	Server hit count (total)
			rhitclient	tlawatch	times	Client hit count (total)
			rhitremote	tlawatch	time	remote hit count (total)

## 4.2.4 The Windows folder/Windows reports



- Data for the "WIN\_PROCESS" record is not collected if the value of the "ptotcpu" field is 0.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	WIN_DISKS PACE	1018	free	GetDiskFreeSpace()	bytes	Free disk capacity (bytes)
			total	GetDiskFreeSpace()	bytes	Total disk capacity (bytes)
			freepc	GetDiskFreeSpace()	percent	Free space % on disk (average for interval)
conres_data	WIN_PROCESS	1019	psyscpu	reg	seconds	Time (seconds) that the process has spent running in privileged mode
			ptotcpu	reg	seconds	CPU time (seconds) that has elapsed for the process
			pusrcpu	reg	seconds	Elapsed time that the process has spent in user mode
			pthrdcnt	reg	threads	Number of threads for the process
			pnpgpool	reg	bytes	Number of pool nonpaged bytes for the process
			ppool	reg	bytes	Number of pool paged bytes for the process
			pvirtual	reg	bytes	Amount of virtual memory used by the process (bytes)
			ppagflt	reg	faults	Number of page faults that have occurred for the process
			ppagsiz	reg	bytes	Size of page files for the process (bytes)
			ppagpsiz	reg	bytes	Maximum number of page files for the process
			pprivate	reg	bytes	Number of private bytes for the process
			pvrtpk	reg	bytes	Maximum amount of virtual memory for the process
resource_data_wide	WIN_LOGDISK BUSY	1020	lreadsec	reg	reads	Number of logical disk read operations
			lwritsec	reg	writes	Number of logical disk write operations
			lqueue	reg	requests	Length of the queue for the logical disk
			lreadbyt	reg	bytes	Number of bytes read from the logical disk
			lwritbyt	reg	bytes	Number of bytes written to the logical disk
			lreadtim	reg	seconds	Time (seconds) that the logical disk was in read busy state

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			lwrittim	reg	seconds	Time (seconds) that the logical disk was in write busy state
			ldisktim	reg	seconds	Time that the logical disk was in busy state
			lidletim	reg	seconds	Time that the logical disk was in idle state
resource_data_wide	WIN_P HYDIS KBUS Y	1021	preadsec	reg	reads	Number of physical disk read operations
			pwritsec	reg	writes	Number of physical disk write operations
			pqueue	reg	requests	Length of the queue for the physical disk
			preadbyt	reg	bytes	Number of bytes read from the physical disk
			pwritbyt	reg	bytes	Number of bytes written to the physical disk
			preadtim	reg	seconds	Time (seconds) that the physical disk was in read busy state
			pwrittim	reg	seconds	Time (seconds) that the physical disk was in write busy state
			psecread	reg	seconds	Time (seconds) spent reading from physical disks
			psecwrit	reg	seconds	Time (seconds) spent writing to physical disks
			psectran	reg	seconds	Time (seconds) spent in physical disk transfers
			psplitio	reg	I/Os	Number of times that physical disk I/O requests have been split
			pdisktim	reg	seconds	Time that the physical disk was in busy state
pidletim	reg	seconds	Time that the physical disk was in idle state			
resource_data_vwide	WIN_ MEMO RY	1022	freemem	reg	bytes	Amount of available memory (Free, Zeroed and Standby)
			cachtotl	reg	bytes	Amount of system cache used
			cachpeak	reg	bytes	Maximum amount of system cache used
			cachflts	reg	faults	Number of cache faults
			comlim	reg	bytes	Number of times the commit limit was reached
			comtot	reg	bytes	Total number of bytes committed
			pagflts	reg	faults	Number of page faults
			pagins	reg	ins	Page-in count
			sycchres	reg	bytes	Number of bytes resident in the system cache
			sycodres	reg	bytes	Number of bytes resident in the system code
			sycodtot	reg	bytes	System code total
			sydrvres	reg	bytes	Number of bytes resident in the system driver
			sydrvtot	reg	bytes	System driver total
			tranflt	reg	faults	Number of page transition faults
			writcopy	reg	copies	Number of page write faults that have been resolved
			nopagalc	reg	allocs	Number of pool nonpaged allocations
			nopagtot	reg	bytes	Number of pool nonpaged bytes
pagalloc	reg	allocs	Number of pool page allocation calls			

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			pagtot	reg	bytes	Number of pool paged bytes
			pgrestot	reg	bytes	Number of pool paged resident bytes
			pagouts	reg	outs	Page-out count
resource_data	WIN_P AGEFI LE	1045	pfusage	reg	percent	Paging file usage rate
			pfusagepk	reg	percent	Peak paging file usage rate
resource_data	WIN_C PUBU SY	1023	cpudcp	reg	seconds	Processor deferred procedure call time
			cpuint	reg	seconds	Processor hardware interrupt time
			syscpu	reg	seconds	Time that the processor has spent running in system mode
			usrcpu	reg	seconds	Time that the processor has spent running in user mode
			totcpu	reg	seconds	Total busy time for the processor
			cpupcent	reg	percent	% cpu usage
resource_data	WIN_ NET_I NTERF ACE	1024	ifbytin	reg	bytes	Number of bytes received
			ifbytot	reg	bytes	Number of bytes sent
			ifqlen	reg	packets	Queue length
			ifpktin	reg	packets	Number of packets received
			ifpktot	reg	packets	Number of packets sent
resource_data	WIN_ NET_S YSTE M	1050	tcpconns	netstat	connections	Active TCP connections
resource_data_wide	WIN_S YSTE M	1025	tprocs	reg	processes	Total number of processes in the system
			tthrds	reg	threads	Total number of threads in the system
			fctlbyte	reg	bytes	Number of file control bytes
			fctlops	reg	operations	Number of file control operations
			freadbyt	reg	bytes	Number of file bytes read
			freadops	reg	operations	Number of file read operations
			fwritbyt	reg	bytes	Number of file bytes written
			fwritops	reg	operations	Number of file write operations
			thrwchs	reg	switches	Number of thread switches
			flems	reg	emulations	Number of floating point emulations
			cpuqueue	reg	threads	CPU queue length
			syscalls	reg	calls	Number of system calls
resource_data	WIN_S YSTE MINF O	FJ1385	tsystemem	wmi	Mbytes	Total size of physical memory (actually available bytes)
			corenum	wmi	number	Number of cores

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
						<Not collected under Windows Server 2003>
			cpunum	wmi	number	Number of logical CPUs
			processor	wmi	MHz	CPU performance

## 4.2.5 The Solaris & Linux folder/UNIX reports



- Data for the "UX\_DISKBUSY" record is not collected if the value of the "iotrserv" field is 0.
- Data for the "UX\_PROCESS" record is not collected if the value of the "rcputim" field is 0.
- The fields where <Solaris>, <Linux>, <AIX>, or <HP-UX> appears in the "Description" column are specific to the operating system enclosed in <>.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_wide	UX_DISKSPACE	1002	dtotfiles	statvfs( )	files	Total files in the filesystem by mount point [df]<snapshot>
			duseblks	statvfs( )	blocks	Used blocks in the filesystem by mount point [df]<snapshot>
			dfrefils	statvfs( )	files	Free files in the filesystem by mount point [df]<snapshot>
			davlblks	statvfs( )	blocks	Free user blocks in the filesystem by mount point [df]<snapshot>
			dblksiz	statvfs( )	number	Block size of the filesystem by mount point
			dtotblk	statvfs( )	blocks	Total blocks in the filesystem by mount point [df]<snapshot>
			dusebyts	statvfs( )	bytes	Used bytes in the filesystem by mount point
			dusembs	statvfs( )	MB	Used megabytes in the filesystem by mount point [df]<snapshot>
			davlbyts	statvfs( )	bytes	Free user bytes in the filesystem by mount point [df]<snapshot>
			davlmbms	statvfs( )	MB	Free user megabytes in the filesystem by mount point [df]<snapshot>
			dtotbyts	statvfs( )	bytes	total bytes in the filesystem by mount point [df]<snapshot>
			dtotmbs	statvfs( )	MB	total megabytes in the filesystem by mount point [df]<snapshot>
			dfreepc	statvfs( )	percent	Free space % in the filesystem by mount point [df]<snapshot>
			fsname	statvfs( )		Name of file system

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description	
resource_data	UX_S YSCA LLS	1003	syscalls	sar	number	System calls (of all types) executed [sar c]<total> <AIX, HP-UX, Solaris>	
			sysreads	sar	number	System read [sar c]<total> < AIX, HP-UX, Solaris>	
			syswrits	sar	number	System write [sar c]<total> < AIX, HP-UX, Solaris>	
			forks	sar	number	Fork calls executed [sar c]<total>	
			execs	sar	number	Exec calls executed [sar c]<total> < AIX, HP-UX, Solaris>	
			chrsread	sar	number	Characters transferred by read system call [sar c]<total>< AIX, HP-UX, Solaris>	
			chrswrit	sar	number	Characters transferred by write system call [sar c]<total>< AIX, HP-UX, Solaris>	
resource_data	UX_FI LEIO	1004	iget	sar	inodes	Inodes taken off the free list [sar a]<total> < AIX, HP-UX, Solaris>	
			namei	sar	number	Calls to the directory search routine that finds the address of a i-node given a path name.[sar a]<total> < AIX, HP-UX, Solaris>	
			dirbk	sar	number	Number of 512-byte blocks read by the directory search routine to locate a directory entry for a specific file.[sar a]<total> < AIX, HP-UX, Solaris>	
resource_data	UX_M QSEM A	1005	messages	sar	number	Message activities [sar m]<total> <Solaris>	
			semaphrs	sar	number	Semaphore activity [sar m]<total> < AIX, HP-UX, Solaris>	
resource_data_wide	UX_P AGIN G	1006	attachs	sar	number	Page faults satisfied by reclaiming a page currently in memory [sar p]<total> < AIX, HP-UX, Solaris>	
			pginreqs	sar	number	Page in requests [sar p]<total> <Solaris>	
			pginpags	sar	pages	pages	Pages paged in [sar p/B vmstat]<Solaris>
					Kbytes	Kbytes	The size of the pages that have been paged in. <Linux>
			proftlts	sar	number	Page faults due to protection error [sar p]<total> <Solaris>	
			addrflts	sar	number	Virtual page address faults: requests for pages not in memory [sar p/vmstat]<total> < AIX, HP-UX, Solaris>	
			pgotpags	sar	pages	pages	Pages paged out [sar g/B vmstat]<Solaris>
					Kbytes	Kbytes	The size of the pages that have been paged out. <Linux>
			pagfrees	sar	pages	Pages placed on the free list [sar g/vmstat]<total> < AIX, HP-UX, Solaris>	
			pagscans	sar	pages	Pages scanned by the page stealing daemon [sar g/vmstat]<total> < AIX, HP-UX, Solaris>	
pgotreqs	sar	number	Page out requests [sar g]<total> <Solaris>				

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			slocks	sar	number	Faults caused by software lock [sar p]<total><Solaris>
			lpgscank	sar	pages	Pages scanned by the kswadpd daemon <Red Hat Enterprise Linux 6>
			lpgscand	sar	pages	Pages scanned directly <Red Hat Enterprise Linux 6>
			lpgsteal	sar	pages	Pages to be corrected <Red Hat Enterprise Linux 6>
			llvmeff	sar	percent	Percentage of the pages to be corrected <Red Hat Enterprise Linux 6>
resource_data	UX_CPUQUEUE	1007	dspqwait	sar	seconds	Dispatch wait queue existence time [sar q] (seconds)<total>
			dspqexst	sar	seconds	Dispatch queue existence time [sar q] (seconds)<total> < AIX, HP-UX, Solaris>
resource_data	UX_MEMFREE	1008	freememp	vmstat - p	bytes	Available bytes for user processing [sar r] (average)<snapshot>
			freeswap	vmstat - p	bytes	Available bytes of swapping disk space [sar r] (average)<snapshot>
			memuse	vmstat - p	percent	% memory used [sar/vmstat] (average)<snapshot><Linux,Solaris>
			kbcommit	sar	Kbytes	Necessary bytes for current workload <Red Hat Enterprise Linux 6>
			commit	sar	percent	Percentage of memory necessary for current workload <Red Hat Enterprise Linux 6>
			swapcad	sar	percent	Percentage of swapping memory used for cache associated with the swapping space which is currently used <Red Hat Enterprise Linux 6>
resource_data_wide	UX_SYSTBL S	1009	prtblent	sar	number	Process table entries [sar v] (average)<snapshot> < AIX, HP-UX, Solaris>
			prtblsiz	sar	number	Process table size [sar v](average)<snapshot> < AIX, HP-UX, Solaris>
			prtblovf	sar	number	Process table overflows [sar v] (average)<total><HP-UX, Solaris>
			intbent	sar	number	Inode table entries [sar v](average)<snapshot>
			intbsiz	sar	number	Inode table size [sar v](average)<snapshot> < AIX, HP-UX, Solaris>
			intblovf	sar	number	Inode table overflows [sar v](average)<total> < AIX, HP-UX, Solaris>
			fltblent	sar	number	File table entries [sar v](average)<snapshot>
			fltblsiz	sar	number	File table size or %used for Linux [sar v] (average)<snapshot> < AIX, HP-UX, Linux sysstat-4, Solaris>
			fltblovf	sar	number	File table overflows [sar v](average)<total> <HP-UX, Solaris>



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			lktblent	sar	number	Lock table entries [sar v](average)<snapshot><Solaris>
			lktblsiz	sar	number	Lock table size [sar v](average)<snapshot><Solaris>
			thtblent	sar	number	Thread table entries [sar v] (average)<snapshot><AIX>
			thtblsiz	sar	number	Thread table size [sar v] (average)<snapshot><AIX>
			ptynr	sar	number	Number of pseudo-terminal <Red Hat Enterprise Linux 6>
resource_data	UX_SWAPO	1010	swpins	sar	number	Swap ins [sar w]<total> <HP-UX, Solaris>
			bkswpins	sar	number	Swap in transfers [sar w]<total> <HP-UX, Linux, Solaris>
			swpouts	sar	number	Swap outs [sar w]<total> <HP-UX, Solaris>
			bkswpots	sar	number	Swap out transfers [sar w]<total><HP-UX, Linux, Solaris>
			prswchs	sar	number	Process switches that have occurred [sar w]<total>
conres_data	UX_PROCESS	1011	rcnetime	ps -o	seconds	Elapsed time
			rputim	ps -o	seconds	CPU time
			rcnvsz	ps -o	Kbytes	Virtual memory size
			rcnnwlp	ps -o	number	Light weight process count <Solaris> Thread count <AIX>
			rcnpmem	ps -o	percentage	Resident set size percentage of real memory <AIX, Linux, Solaris>
			rcnrss	ps -o	Kbytes	Resident set size <Linux, Solaris>
			state	ps -o		State of the process. This is a code for the state of the process that displays in the "S" column of the header in the output format of the ps command. Refer to the manuals of operation systems for detailed descriptions about ps command. <HP-UX, Linux, Solaris>
resource_data	UX_NETWORK_INTERFACE	1012	ipkts	netstat	packets	Packets input through the TCP/IP interface [net]<total>
			ierrs	netstat	packets	Packet input errors for the TCP/IP interface [net]<total>
			opkts	netstat	packets	Packets output through the TCP/IP interface [net]<total>
			oerrs	netstat	packets	Packet output errors for the TCP/IP interface [net]<total>
			collis	netstat	packets	Number of collisions [net]<total> <Solaris>
resource_data_wide	UX_NETWORK_INTERFACE2	1118	inbytes	Linux:sar -n DEV -n EDEV	Bytes	Number of bytes received

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
				Solaris: netstat - k/ dladm show- dev		
			outbytes	Linux:s ar -n DEV -n EDEV  Solaris: netstat - k/ dladm show- dev	Bytes	Number of bytes sent
			indroppkt	Linux:s ar -n DEV -n EDEV  Solaris: (None)	number	Number of drops in receiving  (Not collected under Solaris.)
			outdroppkt	Linux:s ar -n DEV -n EDEV  Solaris: (None)	number	Number of drops in sending  (Not collected under Solaris.)
			infifo	Linux:s ar -n DEV -n EDEV  Solaris: (None)	number	Number of times FIFO overrun has occurred while packets were being received  (Not collected under Solaris.)
			outfifo	Linux:s ar -n DEV -n EDEV  Solaris: (None)	number	Number of times FIFO overrun has occurred while packets were being sent  (Not collected under Solaris.)
resource_data	UX_N ET_SY STEM	1049	tcpconns	netstat	connections	Active TCP connections [net]<total>
resource_data_wide	UX_DI SKBU SY	1013	ioreads	iostat	number	Disk reads [iostat/sar d]<total> <Linux, Solaris>  Disk reads + writes<total> <AIX, HP-UX>
			iowrite	iostat	number	Disk writes [iostat/sar d]<total> <Linux, Solaris>

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			iokreads	iostat	Kbyte	Amount of data read from disk. <AIX, Linux sysstat-4, sysstat-5, Solaris>
					number	Disk kilobytes read + written <total> <HP-UX>
			iokwrite	iostat	number	Amount of data written to disk. <AIX, Linux sysstat-4, sysstat-5, Solaris>
			iotrwct	iostat	number	Transactions waiting for service [iostat/sar d]<snapshot> <HP-UX, Linux, Solaris>
			iotractv	iostat	number	Transactions being serviced [iostat/sar d]<snapshot>
			iotrwait	iostat	secs	Transaction service wait time for all I/O [iostat/sar d](secs)<total>
			iotrserv	iostat	secs	Transaction service time for all I/O [iostat/sar d](secs)<total>
			iowait	iostat	seconds	The number of seconds there were transactions waiting (queue not empty) [iostat/sar d] (seconds)<total>
			iotrbusy	iostat	seconds	Transaction disk busy time [iostat/sar d] (seconds)<total>
resource_data	UX_CPY	1014	mpucpu	mpstat	seconds	Individual CPU time for user requests [mpstat] (seconds)<total>
			mpscpu	mpstat	seconds	Individual CPU time system requests [mpstat] (seconds)<total>
			mpwcpu	mpstat	seconds	Individual CPU time for IO requests [mpstat] (seconds)<total> <AIX, HP-UX, Linux, sysstat-5, Solaris>
			mptcpu	mpstat	seconds	Individual total CPU time [mpstat] (seconds)<total>
			mpminf	mpstat	faults	Minor faults [mpstat]<total> <Solaris>
			mpmjf	mpstat	faults	Major faults [mpstat]<total> <Solaris>
			cpupcent	mpstat	percentage	CPU use rate
resource_data	UX_SWAPS	1015	swalloc	swap -s	Kbytes	Swap space in kilobytes currently allocated for use as backing store. [swap] (Kbytes)<snapshot>
			swresrv	swap -s	Kbytes	Swap space in kilobytes not currently allocated but claimed by memory mappings for possible future use. [swap](Kbytes)<snapshot> <Solaris>
			swused	swap -s	Kbytes	Swap space in kilobytes that is either allocated or reserved. [swap](Kbytes)<snapshot>
			swavail	swap -s	Kbytes	Swap space in kilobytes that is currently available. [swap](Kbytes)<snapshot>
resource_data	UX_SWAPU	1097	swaplsz	swap -l	Kbytes	Swap space <AIX, HP-UX, Solaris>
			swaplused	swap -l	Kbytes	Swap used <AIX, HP-UX, Solaris>

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			swaplused	swap -l	percentage	Swap use rate <AIX, HP-UX, Solaris>
resource_data_wide	UXSYS_PAGING_DETAIL	1016	vmsre	vmstat -p	number	Page reclaims [vmstat p]<total> <Solaris>
			vmsmf	vmstat -p	number	Minor faults [vmstat p]<total> <Solaris>
			vmsfr	vmstat -p	Kbytes	Freed [vmstat p](KB)<total> <Solaris>
			vmsde	vmstat -p	Kbytes	Anticipated shortterm memory shortfall [vmstat p](KB)<total> <Solaris>
			vmssr	vmstat -p	number	Pages scanned by clock algorithm [vmstat p]<total> <Solaris>
			vmsepi	vmstat -p	number	Executable page ins [vmstat p]<total> <Solaris>
			vmsepo	vmstat -p	number	Executable page outs [vmstat p]<total> <Solaris>
			vmsepf	vmstat -p	number	Executable page frees [vmstat p]<total> <Solaris>
			vmsapi	vmstat -p	number	Anonymous page ins [vmstat p]<total> <Solaris>
			vmsapo	vmstat -p	number	Anonymous page outs [vmstat p]<total> <Solaris>
			vmsapf	vmstat -p	number	Anonymous page frees [vmstat p]<total> <Solaris>
			vmsfpi	vmstat -p	number	File system page ins [vmstat p]<total> <Solaris>
			vmsfpo	vmstat -p	number	File system page outs [vmstat p]<total> <Solaris>
vmsfpf	vmstat -p	number	File system page frees [vmstat p]<total> <Solaris>			
resource_data_wide	UX_KMA	1046	smemrqs	sar	bytes	Available small memory pool [sar k] (average)<snapshot> <Solaris>
			smemals	sar	bytea	Allocated small memory pool [sar k] (average)<snapshot> <Solaris>
			smemflrq	sar	requests	Failed small memory requests [sar k]<total> <Solaris>
			lmemrqs	sar	bytes	Available large memory pool [sar k] (average)<snapshot> <Solaris>
			lmemals	sar	bytes	Allocated large memory pool [sar k] (average)<snapshot> <Solaris>
			lmemflrq	sar	requests	Failed large memory requests [sar k]<total> <Solaris>
			omemals	sar	bytes	Allocated oversize memory [sar k] (average)<snapshot> <Solaris>
			omemflrq	sar	requests	Failed oversize memory requests [sar k]<total> <Solaris>

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	UX_IP_CSMQ	1094	mqbytes	ipcs	bytes	Queued message bytes used (CBYTE) [ipcs]<average>
			mqqnum	ipcs	number	Queue depth (QNUM) [ipcs]<average> <AIX, HP-UX, Solaris>
			mqmaxbytes	ipcs	bytes	Maximum queue bytes (QBYTE) [ipcs]<maximum> <AIX, HP-UX, Solaris>
			mqdpercent	ipcs	percentage	% of maximum queue depth [ipcs]<maximum> <HP-UX, Solaris (Except Solaris 10 and after)>
			mqkey	ipcs	name	Key to msgget function call [ipcs]
			mqstime	ipcs	time	Last message sent [ipcs]<time> <AIX, HP-UX, Solaris>
			mqrtime	ipcs	time	Last message received [ipcs]<time> <AIX, HP-UX, Solaris>
resource_data	UX_IP_CSMQ_SUM	1103	mqused	ipcs	count	Used message queue identifiers [ipcs]<maximum>
			mqippercent	ipcs	percentage	% of available message identifiers used [ipcs]<maximum> <HP-UX, Linux, Solaris (Except for Solaris 10 and after)>
resource_data	UX_IP_CSSM	1095	smbytes	ipcs	bytes	Shared memory size (Maximum of SEGSZ) [ipcs]<maximum>
			smpercent	ipcs	percentage	% of available shared memory used [ipcs]<maximum> <HP-UX, Linux, Solaris (Except for Solaris 10 and after)>
			smnatch	ipcs	number	Shared memory processes attached (NATTCH) [ipcs]<average>
			smkey	ipcs	name	Key to shmget function call [ipcs]
resource_data	UX_IP_CSSM_SUM	1104	smsegsused	ipcs	count	Used shared memory identifiers [ipcs]<maximum>
			smsegpercent	ipcs	percentage	% of available shared memory identifiers used [ipcs]<maximum> <HP-UX, Linux, Solaris (Except for Solaris 10 and after)>
resource_data	UX_IP_CSSEM	1096	semnsem	ipcs	number	Number of semaphores (NSEM) [ipcs]<maximum>
			semppercent	ipcs	percentage	% of maximum number of semaphores [ipcs]<maximum> <HP-UX, Linux, Solaris (Except for Solaris 10 and after)>
			semkey	ipcs	name	Key to semget function call [ipcs]
			semotime	ipcs	time	Time last semaphore was complete (OTIME) [ipcs] <AIX,Solaris>
resource_data	UX_IP_CSSEM_SUM	1105	semsused	ipcs	count	Used semaphore identifiers [ipcs]<maximum>
			semippercent	ipcs	percentage	% of maximum semaphore identifiers used [ipcs]<maximum> <HP-UX, Linux, Solaris (Except for Solaris 10 and after)>

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	UX_ZONE	1087	zonenproc	prstat - Z	number	Zone processes running [prstat - Z]<average><Solaris 10>
			zonesize	prstat - Z	Kbytes	Zone virtual memory used [prstat - Z]<average><Solaris 10>
			zonerss	prstat - Z	Kbytes	Zone real memory used [prstat - Z]<average><Solaris 10>
			zonemem	prstat - Z	percent	Zone % memory used [prstat - Z]<average><Solaris 10>
			zonetime	prstat - Z	second	Zone accumulated CPU time for running processes [prstat -Z]<average><Solaris 10> Total of accumulation CPU time of process that operates in Solaris zone.
			zonecpu	prstat - Z	percent	Zone % CPU used [prstat - Z]<average><Solaris 10>  Information on the process that ended between interval is not included. Therefore, it is likely to become a value that is lower than an actual CPU use rate.  When bind is done to the processor set and the Solaris zone is used, CPU use rate becomes the unit of the processor set with 100%.
resource_data	UX_CPUSTA_CORE	1113	coreusrsec	cpustat	seconds	Core CPU time (usr) <Solaris UltraSPARC T1/T2>  Note: UltraSPARC T2 is the CPU time of each execution unit in each core.
			coresyssec	cpustat	seconds	Core CPU time (sys) <Solaris UltraSPARC T1/T2>  Note: UltraSPARC T2 is the CPU time of each execution unit in each core.
			coretotsec	cpustat	seconds	Core CPU time (total) <Solaris UltraSPARC T1/T2, SPARC64 VI/VII/VII+>  Note: UltraSPARC T2 is the CPU time of each execution unit in each core.
			coreusrpc	cpustat pgstat	percent	Usage rate of core CPU time (usr) <Solaris UltraSPARC T1/T2, SPARC T3/T4, SPARC64 X>  Note: UltraSPARC T2, SPARC T3/T4, SPARC64 X is the CPU usage rate of each execution unit in each core.
			coresyspc	cpustat pgstat	percent	Usage rate of core CPU time (sys) <Solaris UltraSPARC T1/T2, SPARC T3/T4, SPARC64 X>  Note: UltraSPARC T2, SPARC T3/T4, SPARC64 X is the CPU usage rate of each execution unit in each core.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			coretotprc	cpustat pgstat	percent	Usage rate of core CPU time (total) <Solaris UltraSPARC T1/T2, SPARC T3/T4, SPARC64 VI/VII/VII+/X>  Note: UltraSPARC T2, SPARC T3/T4, SPARC64 VI/VII/VII+/X is the CPU usage rate of each execution unit in each core.
resource_data	UX_SYSTE MINF O	FJ1386	tsystemem	prtconf/ free	Mbytes	Total size of physical memory (actually available bytes)
			corenum	-	-	Number of cores <Not collected under Solaris and Linux>
			cpunum	psrinfo/ cpuinfo	number	Number of logical CPUs
			processor	uname/ cpuinfo	MHz	CPU performance
resource_data	LX_DI SKBU SY	1055	lrrmrg	iostat	number	Read requests merged [iostat x]<total> <Linux>
			lwrnrg	iostat	number	Write requests merged [iostat x]<total> <Linux>
			liorscts	iostat	number	Disk sector reads [iostat x]<total> <Linux>
			liowscts	iostat	number	Disk sector writes [iostat x]<total> <Linux>
			lavrqs	iostat	number	Size of requests (sectors) issued to device [iostat x]<average> <Linux>
			lutilcpu	iostat	seconds	I CPU time during which I/O requests were issued [iostat x]<total> <Linux>
resource_data	LX_M EMFR EE	1056	lusemem	sar -r	Kbytes	Used KB memory <Linux>
			lshrmem	sar -r	Kbytes	Shared KB memory <Linux sysstat-4>
			lbuffer	sar -r	Kbytes	Buffer KB memory <Linux>
			lcchmem	sar -r	Kbytes	Cache KB memory <Linux>
			lswpuse	sar -r	Kbytes	Used KB swap space <Linux (Red Hat Enterprise Linux 5)>
				sar-S	Kbytes	Used KB swap space <Linux (Red Hat Enterprise Linux 6)>
			lswpcad	sar -r	Kbytes	Cached swap KB memory <Linux (Red Hat Enterprise Linux 5),sysstat-5>
				sar-S	Kbytes	Cached swap KB memory <Linux (Red Hat Enterprise Linux 6)>
			lmemuse	sar -r	percent	% memory used <Linux,sysstat-5>
resource_data	LX_SY STBLS	1057	ldirfre	sar	number	Unused entries in directory cache <Linux>
			lusesbh	sar	number	Superblock handles allocated by kernel <Linux>







Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
						 <b>Note</b> ..... This information not collected by Red Hat Enterprise Linux 6 due to a function incompatibility .....
			lpercsbh	sar	percent	% use of total superblock handles [sar v]<snapshot> <Linux>   <b>Note</b> ..... This information not collected by Red Hat Enterprise Linux 6 due to a function incompatibility .....
			lusedqe	sar	number	Disk quota entries [sar v]<snapshot> <Linux>   <b>Note</b> ..... This information not collected by Red Hat Enterprise Linux 6 due to a function incompatibility .....
			lpercdqe	sar	percent	% of total quota entries [sar v]<snapshot> <Linux>   <b>Note</b> ..... This information not collected by Red Hat Enterprise Linux 6 due to a function incompatibility .....
			lquerts	sar	number	Queued RT signals [sar v]<snapshot> <Linux>   <b>Note</b> ..... This information not collected by Red Hat Enterprise Linux 6 due to a function incompatibility .....
			lpercrts	sar	percent	% use of total RT signals [sar v]<snapshot> <Linux>   <b>Note</b> ..... This information not collected by Red Hat Enterprise Linux 6 due to a function incompatibility .....
resource_data	LX_PAGING	1058	lactpg	sar	pages	Active pages in memory [sar B]<snapshot> <Linux sysstat-4>



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			lindtpg	sar	pages	Inactive dirty pages in memory [sar B]<snapshot> <Linux sysstat-4>
			linclpg	sar	pages	Inactive clean pages in memory [sar B]<snapshot> <Linux sysstat-4>
			lintgpg	sar	number	Inactive target 1 min floating avg of pages system steals to meet memory demands [sar B]<snapshot> <Linux sysstat-4>
			lfault	sar	number	Page faults (major + minor)<Linux sysstat-5>
			lmajflt	sar	number	Major page faults <Linux sysstat-5>
resource_data	LX_CPUQUEUE	1059	lplist	sar	number	Used KB memory [sar r]<snapshot> <Linux>
			lldavg	sar	number	Shared KB memory [sar r]<snapshot> <Linux>
resource_data	LX_MEMORY	1060	lfrmpgs	sar	pages	Pages freed [sar R]<total> <Linux>
			lshmpgs	sar	pages	Additional pages shared [sar R]<total> <Linux sysstat-4>
			lbufpgs	sar	pages	Additional pages used [sar R]<total><Linux>
			lcampgs	sar	pages	Additional pages cached [sar R]<total> <Linux>
resource_data	AX_DISKBUSY	1064	aiotrbusy	sar	seconds	Transaction busy time [sar d]<total><AIX>
			aiotrwct	sar	number	Transactions waiting for service [sar d]<snapshot> <AIX>
			areadwrite	sar	number	Disk reads + writes [sar d]<total> <AIX>
			ablocks	sar	number	Blocks transferred [sar d]<total> <AIX>
resource_data	AX_KERNELPROC	1065	aksched	sar	number	Kernel processes assigned to tasks [sar k]<total> <AIX>
			akprocov	sar	number	Kernel processes not created because of process threshold limit [sar k]<snapshot> <AIX>
			akexits	sar	number	Kernel processes terminating [sar k]<total> <AIX>
resource_data	AX_PAGEING	1066	ausedmem	vmstat	Kbytes	Virtual memory kilobytes used [vmstat]<snapshot> <AIX>
			apgcy	vmstat	number	Clock cycles by page-replacement algorithm [vmstat]<total> <AIX>
resource_data	HP_PAGEING	1067	husedmem	vmstat	Kbytes	Virtual memory kilobytes used [vmstat]<snapshot> <HP-UX>
			hshortfall	vmstat	number	Expected short-term memory shortage <HP-UX>

\*1: In a non-global zone, UX\_CPUSTAT\_CORE information will not be collected.

## 4.2.6 The Interstage folder/Interstage reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_wide	ISPREPORT_TDOBJ	FJ1006	tProcessID	ispreport -k TDOBJ	number	The process ID of the business application for which performance information is being measured
			tMaxReqTime	ispreport -k TDOBJ	milliseconds	Maximum time (during the sampling interval) taken for the process to process an operation
			tMinReqTime	ispreport -k TDOBJ	milliseconds	Minimum time (during the sampling interval) taken for the process to process an operation
			tAvgReqTime	ispreport -k TDOBJ	milliseconds	Average time (during the sampling interval) taken for the process to process an operation
			tMaxWaitTime	ispreport -k TDOBJ	milliseconds	Maximum time (during the sampling interval) that a request spent waiting from the time it was received from the client application until the processing by the server application started
			tMinWaitTime	ispreport -k TDOBJ	milliseconds	Minimum time (during the sampling interval) that a request spent waiting from the time it was received from the client application until the processing by the server application started
			tAvgWaitTime	ispreport -k TDOBJ	milliseconds	Average time (during the sampling interval) that a request spent waiting from the time it was received from the client application until the processing by the server application started
			tProcNum	ispreport -k TDOBJ	number	Number of times the operation has been executed by the process during the sampling interval
			tReqNum	ispreport -k TDOBJ	number	Number of processes for the object that have been accumulated since performance monitoring started
			tWaitNum	ispreport -k TDOBJ	number	Maximum number of requests (during the sampling interval) to the object that had to wait to be processed
			tOPName	ispreport -k TDOBJ	name	The operation name of the business application for which performance information is being measured
resource_data_vwide	ISPREPORT_EJBAPL	FJ1007	eProcessID	ispreport -k EJBAPL	number	The process ID of the EJB application for which performance information is being measured
			eThreadID	ispreport -k EJBAPL		The thread ID for the thread where the monitored method is running
			eMaxReqTime	ispreport -k EJBAPL	milliseconds	Maximum processing time (during the sampling interval) for monitored methods in the thread

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			eMinReqTime	isreport -k EJBAPL	milliseconds	Minimum processing time (during the sampling interval) for monitored methods in the thread
			eAvgReqTime	isreport -k EJBAPL	milliseconds	Average processing time (during the sampling interval) for monitored methods in the thread
			eMaxWaitTime	isreport -k EJBAPL	milliseconds	Maximum time (during the sampling interval) that a request spent waiting from the time it was received from the client application until the method started processing
			eMinWaitTime	isreport -k EJBAPL	milliseconds	Minimum time (during the sampling interval) that a request spent waiting from the time it was received from the client application until the method started processing
			eAvgWaitTime	isreport -k EJBAPL	milliseconds	Average time (during the sampling interval) that a request spent waiting from the time it was received from the client application until the method started processing
			eProcNum	isreport -k EJBAPL		Number of times the monitored method in the thread has been processed during the sampling interval
			eReqNum	isreport -k EJBAPL		Number of EJB application processes that accumulated during the sampling interval
			eWaitNum	isreport -k EJBAPL		Maximum number of requests (during the sampling interval) to the EJB application that had to wait to be processed. For "Message-drive Bean" EJB applications, this is always "0".
			ObjNum	isreport -k EJBAPL		Number of current EJB objects (the difference between the number of times that the create() method has been executed and the number of times that the remove() method has been executed)
			MaxPassivate	isreport -k EJBAPL		Maximum number of times that instances of the EJB application (process) have been pooled during the sampling interval
			MaxVMMem	isreport -k EJBAPL	Kbytes	The maximum amount of memory used by the VM for the EJB application. This will be "0" if the method has not been processed during the sampling interval.
			AvgVMMem	isreport -k EJBAPL	Kbytes	The average amount of memory used by the VM for the EJB application. This will be "0" if the method has not been processed during the sampling interval.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			MethodName	ispreport -k EJBAPL		The name and signature of the method being monitored (the types of method argument and return value)
resource_data_wide	ISPREPORT_IMPLID	FJ1008	iProcessID	ispreport -k IMPLID		The process ID of the CORBA application being monitored
			iThreadID	ispreport -k IMPLID		The thread ID of the CORBA application being monitored
			iMaxReqTime	ispreport -k IMPLID	milliseconds	The maximum processing time for the operation in the thread during the sampling interval
			iMinReqTime	ispreport -k IMPLID	milliseconds	The minimum processing time for the operation in the thread during the sampling interval
			iAvgReqTime	ispreport -k IMPLID	milliseconds	The average processing time for the operation in the thread during the sampling interval
			iMaxWaitTime	ispreport -k IMPLID	milliseconds	Maximum time (during the sampling interval) spent waiting from the time that a request was received from the client application until the object started processing
			iMinWaitTime	ispreport -k IMPLID	milliseconds	Minimum time (during the sampling interval) spent waiting from the time that a request was received from the client application until the object started processing
			iAvgWaitTime	ispreport -k IMPLID	milliseconds	Average time (during the sampling interval) spent waiting from the time that a request was received from the client application until the object started processing
			MaxDataLen	ispreport -k IMPLID	bytes	The maximum data length sent from the client application
			MinDataLen	ispreport -k IMPLID	bytes	The minimum data length sent from the client application
AvgDataLen	ispreport -k IMPLID	bytes	The average data length sent from the client application			

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			iProcNum	ispreport -k IMPLID		Number of times that the operation has been processed in the thread during the sampling interval
			iReqNum	ispreport -k IMPLID		Number of processes for the object that accumulated during the sampling interval
			iWaitNum	ispreport -k IMPLID		Maximum number of requests (during the sampling interval) to the object that had to wait to be processed
			ObjectName	ispreport -k IMPLID		The name of the object that is included in the implementation repository
			iOPName	ispreport -k IMPLID		The operation name within the object that is included in the implementation repository
resource_data_wide	IS_JMX_JVM	FJ1088	ijjvhpcur	jmxif	bytes	Current heap size
			ijjvhpmin	jmxif	bytes	Minimum heap size
			ijjvhpmax	jmxif	bytes	Maximum heap size
			ijjvhpulim	jmxif	bytes	Heap size upper limit
			ijpermcure	jmxif	bytes	Current Perm
			ijpermmine	jmxif	bytes	Minimum Perm
			ijpermmaxe	jmxif	bytes	Maximum Perm
			ijpermulim	jmxif	bytes	Perm upper limit
			ijgcocnum	jmxif	number	Number of garbage collections
			ijgcoctim	jmxif	milliseconds	Total time spent on garbage collections
ijgcocavg	jmxif	milliseconds	Average interval between garbage collections			
resource_data	IS_JMX_SERVLET	FJ1089	ijsvltmcal	jmxif	number	Method call count
			ijsvlptavg	jmxif	microsec	Average processing time
			ijsvlptmax	jmxif	microsec	Maximum processing time
			ijsvlptmin	jmxif	microsec	Minimum processing time
resource_data	IS_JMX_ENTITYBEAN_METHOD	FJ1090	ijentmcal	jmxif	number	Method call count
			ijentptavg	jmxif	microsec	Average processing time
			ijentptmax	jmxif	microsec	Maximum processing time
			ijentptmin	jmxif	microsec	Minimum processing time
resource_data_wide	IS_JMX_BEAN	FJ1091	ijenticur	jmxif	number	Current number of ready instances
			ijentimax	jmxif	number	Maximum number of ready instances

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
	_POOL _AND_ PASSI VATE		ijentimin	jmxif	number	Minimum number of ready instances
			ijentpicur	jmxif	number	Current number of instances in pool
			ijentpimax	jmxif	number	Maximum number of instances in pool
			ijentpimin	jmxif	number	Minimum number of instances in pool
			ijentricur	jmxif	number	Average number of instances used in a single transaction
			ijentrimax	jmxif	number	Maximum number of instances used in a single transaction
			ijentrimin	jmxif	number	Minimum number of instances used in a single transaction
			ijentpvcur	jmxif	number	Average number of passivated instances
			ijentpvmax	jmxif	number	Maximum number of passivated instances
			ijentpvmin	jmxif	number	Minimum number of passivated instances
			ijentpvnum	jmxif	number	Number of transactions in which passivation occurred
	ijenttrnum	jmxif	number	Method call count		
resource_data	IS_JM X_STF BEAN _MET HOD	FJ1092	ijstfmcals	jmxif	number	Average processing time
			ijstfmptavg	jmxif	microsec	Maximum processing time
			ijstfmptmax	jmxif	microsec	Minimum processing time
			ijstfmptmin	jmxif	microsec	Current number of ready instances
resource_data	IS_JM X_STF BEAN _INS_ _AND_I DLE	FJ1093	ijstfiicur	jmxif	number	Current number of instances that can invoke a method
			ijstfiimax	jmxif	number	Maximum number of instances that can invoke a method
			ijstfiimin	jmxif	number	Minimum number of instances that can invoke a method
			ijstfitime	jmxif	seconds	Timeout time
			ijstfinum	jmxif	number	Timeout count
resource_data	IS_JM X_STL SBEA N_ME THOD	FJ1094	ijstlmcal	jmxif	number	Method call count
			ijstlmptavg	jmxif	microsec	Average processing time
			ijstlmptmax	jmxif	microsec	Maximum processing time
			ijstlmptmin	jmxif	microsec	Minimum processing time
resource_data	IS_JM X_ME SSBEA N_ME THOD	FJ1095	ijmesmcals	jmxif	number	Method call count
			ijmesptmax	jmxif	microsec	Maximum processing time
			ijmesptmin	jmxif	microsec	Minimum processing time
resource_data	IS_JM X_ME SSBEA N_INF O	FJ1096	ijmesprnum	jmxif	number	Number of processed messages
			ijmesvnum	jmxif	number	Number of saved messages
resource_data_wide	IS_JM X_JTA	FJ1097	ijtaexnum	jmxif	number	Total number of executed transactions

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
	RESOURCE		ij tactnum	jmxif	number	Number of committed transactions
			ij tarbnum	jmxif	number	Number of transactions rolled back
			ij tatravg	jmxif	microsec	Average transaction processing time
			ij tatrmax	jmxif	microsec	Maximum transaction processing time
			ij tatrmin	jmxif	microsec	Minimum transaction processing time
			ij tatpavg	jmxif	number	Current number of transactions being executed
			ij tatpmax	jmxif	number	Maximum number of transactions being executed
resource_data_uwide	IS_JMX_JDBCRESOURCE	FJ1098	ijdbcpcur	jmxif	number	Number of physical connections - Current value (*1)
			ijdbcpulim	jmxif	number	Number of physical connections - Upper limit (*1)
			ijdbcfree	jmxif	number	Number of free connections (*1)
			ijdbcused	jmxif	number	Number of used connections (*1)
			ijdbcwtnum	jmxif	number	Connection wait count (*2)
			ijdbcwtavg	jmxif	microsec	Connection wait time - Average (*2)
			ijdbcwtmax	jmxif	microsec	Connection wait time - Maximum (*2)
			ijdbcwtmin	jmxif	microsec	Connection wait time - Minimum (*2)
			ijdbctcur	jmxif	number	Number of threads waiting for a connection - Current value (*2)
			ijdbcthmax	jmxif	number	Number of threads waiting for a connection - Maximum value (*2)
			ijdbcthout	jmxif	number	Number of connection wait timeouts (*2)
			ijdbpcnum	jmxif	number	Number of physical connections established (*2)
			ijdbpcavg	jmxif	microsec	Physical connection establishment time - Average (*2)
			ijdbpcmax	jmxif	microsec	Physical connection establishment time - Maximum (*2)
			ijdbpcmin	jmxif	microsec	Physical connection establishment time - Minimum (*2)
			ijdbcidlecl	jmxif	number	Number of closures caused by idle timeouts (*2)
			ijdbcexcl	jmxif	number	Number of closures caused by exceptions (*2)
			ijdbcget	jmxif	number	Connection allocation count
			ijdbccls	jmxif	number	Connection closure count
			ijdbccavg	jmxif	microsec	Connection time - Average
ijdbccmax	jmxif	microsec	Connection time - Maximum			
ijdbccmin	jmxif	microsec	Connection time - Minimum			

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	IS_JM X_EVE NTSER VICE	FJ1306	ijevntcntsum	jmxif	number	Number of accumulation event data
			ijevntnum	jmxif	number	connected consumers
			ijevntsprnum	jmxif	number	connected suppliers
resource_data	IS_JM X_SER VLET CONT AINER	FJ1305	ijsvcntnum	jmxif	number	Number of threads processing now
			ijsvcnttotal	jmxif	number	Total number of threads
resource_data	IS_JM X_WE BAPPS ESSIO N	FJ1304	ijwebapnum	jmxif	number	sessions
resource_data_wide	IS_JM X_JAV AEE_J VM	FJ1367	isjmxjvmhptim	isjmx	millisec onds	Operation time of Java VM
			isjmxjvmhplwbnd	isjmx	byte	Lower limit of Java VM heap size
			isjmxjvmhpupbnd	isjmx	byte	Upper limit of Java VM heap size
			isjmxjvmhpcrt	isjmx	byte	Current usage of Java VM heap
			isjmxjvmhplwwtmk	isjmx	byte	Minimum usage of Java VM heap within the measured time
			isjmxjvmhp hiwtmk	isjmx	byte	Maximum usage of Java VM heap within the measured time
			isjmxjvmprmmax	isjmx	byte	Upper limit of Perm area
			isjmxjvmprmlwwtmk	isjmx	byte	Minimum usage of Perm area within the measured time
			isjmxjvmpr mhiwtmk	isjmx	byte	Maximum usage of Perm area within the measured time
			isjmxjvmprm	isjmx	byte	Current usage of Perm area
			isjmxjvmgcnt	isjmx	number	Number of garbage collections
			isjmxjvmgctim	isjmx	millisec onds	Time spent on garbage collection
resource_data_vwide	IS_JM X_JAV AEE_J DBC_P OOL	FJ1368	isjmxjdbcwavg	isjmx	millisec onds	Average wait time of connection requests
			isjmxjdbcwmin	isjmx	millisec onds	Minimum wait time of connection requests
			isjmxjdbcwmax	isjmx	millisec onds	Maximum wait time of connection requests



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			isjmxjdbcwttm	isjmx	milliseconds	Wait time of the most recently received connection request
			isjmxjdbcgctnum	isjmx	number	Number of logical connections claimed from the pool
			isjmxjdbcmkcnum	isjmx	number	Number of created physical connections
			isjmxjdbcdstcnum	isjmx	number	Number of discarded physical connections
			isjmxjdbcfailcnum	isjmx	number	Number of physical connections that failed verification
			isjmxjdbcfrcnummin	isjmx	number	Minimum number of physical connections not being used
			isjmxjdbcfrcnummax	isjmx	number	Maximum number of physical connections not being used
			isjmxjdbccnum	isjmx	number	Current number of physical connections not being used
			isjmxjdbcdnycnum	isjmx	number	Number of physical connections that failed in authentication information matching
			isjmxjdbcbkcnum	isjmx	number	Number of logical connections returned to the pool
			isjmxjdbcagrcnum	isjmx	number	Number of physical connections that succeeded in authentication information matching
			isjmxjdbctmotcnum	isjmx	number	Number of timed out physical connections
			isjmxjdbcdmcdmin	isjmx	number	Minimum number of physical connections being used
			isjmxjdbcdmcdmax	isjmx	number	Maximum number of physical connections being used
			isjmxjdbcdmcdsecnum	isjmx	number	Current number of physical connections being used
			isjmxjdbcrqwtcnum	isjmx	number	Number of connection requests waiting in queue
			isjmxjdbclkcnum	isjmx	number	Number of connections with leaks
			isjmxjdbcplnm	isjmx	string	JDBC connection pool name
resource_data	IS_JMX_JAV_AEE_MSGDRIVEN_BEAN	FJ1369	isjmxmbnmsgnum	isjmx	number	Number of received messages for message-driven bean
			isjmxmbncrtmtcnt	isjmx	number	Number of times create method invoked for message-driven bean
			isjmxmbnrmtcnt	isjmx	number	Number of times remove method invoked for message-driven bean
			isjmxmbnapnm	isjmx	string	Application name

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			isjmxmbnmm	isjmx	string	MessageDrivenBean name
			isjmxmbnejbnm	isjmx	string	EJB module name
resource_data_vwide	IS_JMX_JAV_AEE_THREAD_POOL	FJ1370	isjmxtdwtmmin	isjmx	milliseconds	Minimum wait time until requests in queue are processed
			isjmxtdwtmmax	isjmx	milliseconds	Maximum wait time until requests in queue are processed
			isjmxtdwtmavg	isjmx	milliseconds	Average wait time until requests in queue are processed
			isjmxtdactmmin	isjmx	milliseconds	Minimum average completion time for one job
			isjmxtdactmmax	isjmx	milliseconds	Maximum average completion time for one job
			isjmxtdactmavg	isjmx	milliseconds	Average completion time for one job
			isjmxtdrqnmwlmt	isjmx	number	Lower limit of number of request processing threads
			isjmxtdrqnmuplmt	isjmx	number	Upper limit of number of request processing threads
			isjmxtdrqnmmin	isjmx	number	Minimum number of request processing threads
			isjmxtdrqnmmax	isjmx	number	Maximum number of request processing threads
			isjmxtdrqnm	isjmx	number	Current number of request processing threads
			isjmxtdusenm	isjmx	number	Number of usable threads
			isjmxtdactnm	isjmx	number	Number of threads with active status
			isjmxtdqueadd	isjmx	number	Number of job items added to job queue
			isjmxtdquelwlmt	isjmx	number	Lower limit of number of job items in queue
			isjmxtdquemin	isjmx	number	Minimum number of job items in queue (The data is output to the field of data_num17 when generated by sqcPDBcout (CSV Output Command).)
			isjmxtdquemax	isjmx	number	Maximum number of job items in queue (The data is output to the field of data_num18 when generated by sqcPDBcout (CSV Output Command).)
			isjmxtdquenm	isjmx	number	Current number of job items in queue (The data is output to the field of data_num19 when generated by sqcPDBcout (CSV Output Command).)

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			isjmxtdplnm	isjmx	string	Thread pool name
resource_data	IS_JMX_JAV_AEE_ORB_CONNECTION	FJ1371	isjmxorbidlum	isjmx	number	Number of connections to ORB in idle state
			isjmxorbuse num	isjmx	number	Number of connections to ORB being used
			isjmxorbcnl wlmnt	isjmx	number	Lower limit of number of connections to ORB
			isjmxorbenu plmt	isjmx	number	Upper limit of number of connections to ORB
			isjmxorbcn min	isjmx	number	Minimum number of connections to ORB
			isjmxorbcn max	isjmx	number	Maximum number of connections to ORB
			isjmxorbenn um	isjmx	number	Number of connections to ORB
			isjmxorbmg nm	isjmx	string	Connection manager name
resource_data	IS_JMX_JAV_AEE_CONNECTION_QUEUE	FJ1372	isjmxthpucn cnt	isjmx	number	Number of times HTTP requests could not be stored because queue was full
			isjmxhtpexc nnm	isjmx	number	Number of HTTP requests currently in queue
			isjmxhttp15 minavcnt	isjmx	number	Average number of connections in queue in last 15 minutes
			isjmxhttp1mi navcnt	isjmx	number	Average number of connections in queue in last 1 minute
			isjmxhttp5mi navcnt	isjmx	number	Average number of connections in queue in last 5 minutes
			isjmxhtpacc nnm	isjmx	number	Total number of HTTP requests stored in queue
			isjmxhtppte nnm	isjmx	number	Total number of HTTP requests received
			isjmxhtpque maxsz	isjmx	number	Maximum queue size
			isjmxhtpma xcnnm	isjmx	number	Maximum number of HTTP requests in queue simultaneously
resource_data_v wide	IS_JMX_JAV_AEE_CONNECTION_POOL	FJ1373	isjmxclpwt mavg	isjmx	milliseconds	Average wait time of connection request
			isjmxclpwt mmin	isjmx	milliseconds	Minimum wait time of connection request
			isjmxclpwt mmax	isjmx	milliseconds	Maximum wait time of connection request
			isjmxclpwt mnew	isjmx	milliseconds	Wait time of the most recently received connection request
			isjmxcp llgc nnum	isjmx	number	Number of logical connections claimed from the pool

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			isjmxcpplphcnum	isjmx	number	Number of created physical connections
			isjmxcpldlp hcnum	isjmx	number	Number of discarded physical connections
			isjmxcpclnflnum	isjmx	number	Number of physical connections that failed verification
			isjmxcpfrnummin	isjmx	number	Minimum number of physical connections not being used
			isjmxcpfrnummax	isjmx	number	Maximum number of physical connections not being used
			isjmxcpfrnum	isjmx	number	Current number of physical connections not being used
			isjmxcpfailcnum	isjmx	number	Number of physical connections that succeeded in authentication information matching
			isjmxcpfrlcnum	isjmx	number	Number of logical connections returned to the pool
			isjmxcpsucnum	isjmx	number	Number of physical connections that succeeded in authentication information matching
			isjmxcppltmctnum	isjmx	number	Number of timed out physical connections
			isjmxcpplusecmin	isjmx	number	Minimum number of physical connections being used
			isjmxcpplusecmax	isjmx	number	Maximum number of physical connections being used
			isjmxcpplusecnow	isjmx	number	Current number of physical connections being used
			isjmxcpplrqwtctnum	isjmx	number	Number of physical connections waiting in queue
			isjmxcpplplnm	isjmx	string	Connector connection pool name
resource_data_wide	IS_JMX_JAVAAE_HTTP_LISTENER	FJ1374	isjmxhlsnrcvtl	isjmx	byte	Value of bytes received by each request processor
			isjmxhlsnsndttl	isjmx	byte	Value of bytes sent by each request processor
			isjmxhlsnrcnum	isjmx	number	Number of HTTP requests being received by the current HTTP listener
			isjmxhlsnrpnnum	isjmx	number	Total number of responses including other response codes
			isjmxhlsnnexthnum	isjmx	number	Number of request processing threads currently within HTTP listener
			isjmxhlsnusetnum	isjmx	number	Number of request processing threads currently being used
			isjmxhlsnerrcnt	isjmx	number	Error count

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			isjmxhlsnsm cmax	isjmx	number	Maximum number of HTTP requests that the HTTP listener can receive simultaneously
			isjmxhlsnun rpthmax	isjmx	number	Maximum number of unused request processing threads that can exist
			isjmxhlsnm krqthmax	isjmx	number	Maximum number of request processing threads created by the listener
			isjmxhlsnpr ctmmax	isjmx	millisecon ds	Maximum value of thread processing time
			isjmxhlsnun rpthmin	isjmx	number	Minimum number of unused request processing threads that can exist
			isjmxhlsnrqt mttl	isjmx	millisecon ds	Time required to process each request
			isjmxhlsnrq num	isjmx	number	Total number of requests processed
			isjmxhlsn m	isjmx	string	HTTP listener name
			isjmxhlsnvs vnm	isjmx	string	Virtual server name
resource_data	IS_JM X_JAV AEE_ENTI TITY_BE AN	FJ1375	isjmxetbnist min	isjmx	number	Minimum number of instances within pool
			isjmxetbnist max	isjmx	number	Maximum number of instances within pool
			isjmxetbnist now	isjmx	number	Current number of instances within pool
			isjmxetbnidl min	isjmx	number	Minimum number of Bean instances within cache in idle state
			isjmxetbnidl max	isjmx	number	Maximum number of Bean instances within cache in idle state
			isjmxetbnidl now	isjmx	number	Current number of Bean instances within cache in idle state
			isjmxetbnap pnm	isjmx	string	Application name
			isjmxetbnn m	isjmx	string	EntityBean name
			isjmxetbnej bnm	isjmx	string	EJB module name
resource_data_w ide	IS_JM X_JAV AEE_S TATEFU L_SE SSION	FJ1376	isjmxsfsbps vmin	isjmx	number	Minimum number of passivated instances
			isjmxsfsbps vmax	isjmx	number	Maximum number of passivated instances
			isjmxsfsbps vnow	isjmx	number	Current number of passivated instances
			isjmxsfsbidl min	isjmx	number	Minimum number of Bean instances within cache in idle state
			isjmxsfsbidl max	isjmx	number	Maximum number of Bean instances within cache in idle state

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			isjmxsfsbidlnow	isjmx	number	Current number of Bean instances within cache in idle state
			isjmxsfsbcrmtcnt	isjmx	number	Number of times EJB create method invoked
			isjmxsfsbrmvmtcnt	isjmx	number	Number of times EJB remove method invoked
			isjmxsfsbapnm	isjmx	string	Application name
			isjmxsfsbnm	isjmx	string	StatefulSessionBean name
			isjmxsfsbejbnm	isjmx	string	EJB module name
resource_data	IS_JMX_JAV_AEE_S_TATEL ESS_S ESSION	FJ1377	isjmxslsbistmin	isjmx	number	Minimum number of instances within pool
			isjmxslsbistmax	isjmx	number	Maximum number of instances within pool
			isjmxslsbistnow	isjmx	number	Current number of instances within pool
			isjmxslsbcrmtcnt	isjmx	number	Number of times EJB create method invoked
			isjmxslsbrmvmtcnt	isjmx	number	Number of times EJB remove method invoked
			isjmxslsbapl nm	isjmx	string	Application name
			isjmxslsbnm	isjmx	string	StatelessSessionBean name
			isjmxslsbejbnm	isjmx	string	EJB module name
resource_data	IS_JMX_JAV_AEE_TRANSACTION	FJ1378	isjmxtrnrbknum	isjmx	number	Number of rolled back transactions
			isjmxtrncmt num	isjmx	number	Number of committed transactions
			isjmxtrnactn um	isjmx	number	Current number of active transactions

\*1: Collected only if JDBC connections are pooled under Interstage, or if the database is Oracle10g or later and the JDBC drivers pool JDBC connections. Otherwise, not collected.

\*2: Collected only if JDBC connections are pooled under Interstage. Not collected when the JDBC drivers pool JDBC connections.

#### 4.2.7 The Interstage(TxnAnalysis)JavaEE & The Interstage(TxnAnalysis) folder/No data

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_twide	IS_TXN_RES P	FJ1103	resptime	Interstage	msec	The response time between the start and termination of a component of a Java EE application running on IJServer cluster or a

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
				ARM API		J2EE application component running on IIServer.
			blocktim	Interstage ARM API	msec	The time from when one component invokes another component until control returns to the first component (block time).
			txnstatus	Interstage ARM API	status code	The status of each component when processing has terminated. <ul style="list-style-type: none"> <li>- 0: Success <ul style="list-style-type: none"> <li>- The tasks completed normally as expected.</li> </ul> </li> <li>- 1: Abort <ul style="list-style-type: none"> <li>- A basic problem occurred in the system.</li> </ul> </li> <li>- 2: Failure <ul style="list-style-type: none"> <li>- There were no processing-related problems in the application, but the desired result was not obtained.</li> </ul> </li> </ul>
			armwname	Interstage ARM API	string	Server Instance name (Java EE environment) Work Unit name (J2EE environment)
			armtxnid	Interstage ARM API	string	Transaction ID
			armcomptype	Interstage ARM API	string	Component type
			armapname	Interstage ARM API	string	Application name
			armkname	Interstage ARM API	string	Operation type Differs according to the component type: <ul style="list-style-type: none"> <li>- For ServletContainer: Client IP address</li> <li>- For Servlet or JSP: Servlet name</li> <li>- Other: Method name</li> </ul>
			armuri	Interstage ARM API	string	URI
			armpid	Interstage	string	Process ID

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
				ARM API		
			armportno	Interstage ARM API	string	Port number

#### 4.2.8 The TxnAnalysis(Sync) folder/No data

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_twide	TDAS YNC	FJ1301	contid	Log	ID	context id
			trxnamsync	Log	name	transaction name
			starttimsync	Log	time	transaction start time"
			endtimsync	Log	time	transaction end time
			exetimsync	Log	time	transaction execute time
			effectimsync	Log	time	transaction effect time

#### 4.2.9 The TxnAnalysis(Async) folder/No data

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_twide	TDAA SYNC	FJ1302	actstotal	Log	number	activity total number
			corid	Log	ID	coriration id
			trxnamasync	Log	name	transaction name
			starttimasync	Log	time	transaction start time"
			endtimasync	Log	time	transaction end time
			exetimasync	Log	time	transaction execute time
			comtim	Log	time	Communication time
resource_data_twide	TDAA CTIVITY	FJ1303	coridact	Log	ID	coriration id
			trxnamact	Log	name	transaction name
			actnam	Log	name	activity name
			starttimact	Log	time	transaction start time
			endtimact	Log	time	transaction end time
			exetimact	Log	time	transaction execute time

#### 4.2.10 The TxnAnalysis(OssJava) folder/No data

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_twide	TDAO SSJAVA	FJ1365	actstotalossjava	Log	number	activity total number
			contidossjava	Log	ID	context id



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			trxnamosjava	Log	name	transaction name
			starttimosjava	Log	time	transaction start time"
			endtimosjava	Log	time	transaction end time
			exetimosjava	Log	time	transaction execute time
			effectimossjava	Log	time	transaction effect time
resource_data_twide	TDAOSSJAVAACT	FJ1366	contidojact	Log	ID	context id
			trxnamojact	Log	name	transaction name
			acttypeojact	Log	name	activity type
			actnamojact	Log	name	activity name
			starttimojact	Log	time	transaction start time
			endtimojact	Log	time	transaction end time
			effectimojact	Log	time	transaction effect time

#### 4.2.11 The WebLogicServer folder/WebLogicServer reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_twide	WL_JMX_JAVAAE_JVM	FJ1390	wljsxjvmhptim	wljsx	milliseconds	Operation time of Java VM
			wljsxjvmhpu_pwnd	wljsx	byte	Upper restriction of Java VM heap size
			wljsxjvmhpcrt	wljsx	byte	Current size of Java VM heap
			wljsxjvmhpsize	wljsx	byte	Current usage of Java VM heap
			wljsxjvmhpfree	wljsx	byte	Amount of free Java VM heap
			wljsxjvmhpuse	wljsx	percent	Usage rate of Java VM heap
			wljsxjvmjgc_cnt	wljsx	number	Number of occurrence of garbage collection
			wljsxjvmjgctim	wljsx	milliseconds	Time spent on garbage collection
resource_data_twide	WL_JMX_JAVAAE_JDBC_POOL	FJ1391	wljsxjdplacnav	wljsx	number	Average number of active connections
			wljsxjdplcnuse	wljsx	number	Number of connections active now
			wljsxjdplacnmx	wljsx	number	Maximum active connections

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			wljmxjdpncntm	wljmx	milliseconds	Connection delay time
			wljmxjdpncntl	wljmx	number	Number of connections
			wljmxjdpncnt	wljmx	number	Current capacity
			wljmxjdpncnsmx	wljmx	number	Current maximum capacity
			wljmxjdpnrqcnt	wljmx	number	Number of requests failed to reserve
			wljmxjdpnrflcnt	wljmx	number	Number of failures of reconnection
			wljmxjdpnractnmx	wljmx	number	Maximum numbers usable
			wljmxjdpnrkcnt	wljmx	number	Number of leaked connections
			wljmxjdpnrncnt	wljmx	number	Number of usable
			wljmxjdpnrncnt	wljmx	number	Number of unusable
			wljmxjdpnrstacnt	wljmx	number	Access number of prepared statement cache
			wljmxjdpnrstacnt	wljmx	number	Addition number of prepared statement cache
			wljmxjdpnrstalcnt	wljmx	number	Current size of prepared statement cache
			wljmxjdpnrststdcnt	wljmx	number	Deletion number of prepared statement cache
			wljmxjdpnrstuscnt	wljmx	number	Hit number of prepared statement cache
			wljmxjdpnrstnrqcnt	wljmx	number	Failure number of prepared statement cache
			wljmxjdpnrqrqcnt	wljmx	number	Number of reserved requests
			wljmxjdpnrwtrqcnt	wljmx	number	Current number of waiting connections
			wljmxjdpnrwtrqcnt	wljmx	number	Failure number of waiting connections
			wljmxjdpnrwtrqmx	wljmx	number	Maximum number of waiting connections
			wljmxjdpnrwtrqcnt	wljmx	number	Success number of waiting connections
			wljmxjdpnrwtrqtl	wljmx	number	Number of waiting connections
			wljmxjdpnrwtrqtm	wljmx	second	Maximum waiting time(second)

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			wljmxjdpnlm	wljmx	string	JDBC data source name
resource_data_vwide	WL_JMX_JA_VAEE_THRE AD_POOL	FJ1393	wljmxtpacthdcnt	wljmx	number	Number of active threads of execution
			wljmxtpexethdcnt	wljmx	number	Total number of execution threads
			wljmxtpidlthdcnt	wljmx	number	Number of idling execution threads
			wljmxtpquelngh	wljmx	number	Queue length
			wljmxtpwtreqcnt	wljmx	number	Number of pending user requests
			wljmxtpwkmgcmsz	wljmx	number	Share capacity of work manager
			wljmxtpcmprqcnt	wljmx	number	Number of requests done
			wljmxtpcothdcnt	wljmx	number	Number of possessed threads
			wljmxtpstbthdcnt	wljmx	number	Number of standby threads
			wljmxtppscmaprcent	wljmx	number	Throughput
			wljmxtpsvminlim	wljmx	number	Pending of minimum thread constraint
			wljmxtpfinminlim	wljmx	number	Number of minimum thread constraint done
			wljmxtpnm	string	number	Thread pool name
resource_data	WL_JMX_JA_VAEE_TRANSACTION	FJ1398	wljmxtsexecnt	wljmx	number	Number of transactions
			wljmxtscomtcnt	wljmx	number	Number of transactions committed
			wljmxtsrbcnt	wljmx	number	Number of transactions rolledback
			wljmxtssturbcnt	wljmx	number	Number of timeout error transactions rolledback
			wljmxtsrerrbcnt	wljmx	number	Number of resource error transactions rolledback
			wljmxtsaperrbcnt	wljmx	number	Number of application error transactions rolledback
			wljmxtserrbcnt	wljmx	number	Number of system error transactions rolledback
			wljmxtsshrmpcnt	wljmx	number	Number of heuristic decisions
			wljmxtsdstcnt	wljmx	number	Number of aborted transactions
			wljmxtsnorscnt	wljmx	number	Number of no resource committed transactions

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			wljmxtsonephscnt	wljmx	number	Number of 1 resource 1 phase committed transactions
			wljmxtsrdolycnt	wljmx	number	Number of read only 1 phase committed transactions
			wljmxtstwophscnt	wljmx	number	Number of 2 phase committed transactions
			wljmxtsllrcnt	wljmx	number	Number of LLR committed transactions
			wljmxtsactcnt	wljmx	number	Total number of active transactions

#### 4.2.12 The MS-.NET folder/MS-.NET reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_wide	ASP.NET	1100	Preqqd	MS.NET	requests	The number of requests waiting to be processed <snapshot>
			preqrej	MS.NET	requests	The number of requests rejected because the request queue was full <total>
			Pappr	MS.NET	requests	Number of times the application has been restarted <total>
			preqextm	MS.NET	milliseconds	The time that it took to execute the most recent request <snapshot>
			preqwtm	MS.NET	milliseconds	The number of milliseconds the most recent request was waiting in the queue <snapshot>
			preqdis	MS.NET	requests	The number of requests disconnected due to communication errors or user terminated <total>
			pwprestrt	MS.NET	restarts	Number of times a worker process has restarted on the machine <total>
			pwprun	MS.NET	applications	Number of currently running web applications. <snapshot>
resource_data_wide	ASP.NET_APP	1101	perrtot	MS.NET	errors	Total number of errors occurred <total>
			perrdp	MS.NET	errors	Number of errors that have occurred during parsing and configuration <total>
			perrdc	MS.NET	errors	Number of errors that have occurred during compilation <total>
			perrde	MS.NET	errors	Number of errors that have occurred during the processing of a request <total>
			preqsec	MS.NET	requests	The number of requests executed during the collection period<total>
			preqbit	MS.NET	bytes	The total size, in bytes, of all requests <total>
			preqbot	MS.NET	bytes	The total size, in bytes, of responses sent to a client. This does not include standard HTTP response headers <total>

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			preqex	MS.NET	requests	The number of requests currently executing <snapshot>
			preqfail	MS.NET	requests	Total number of failed requests <total>
			preqto	MS.NET	requests	The number of requests that timed out <total>
			psesact	MS.NET	sessions	The current number of sessions currently active <snapshot>
resource_data	NET_CLR	1102	ptotrc	MS.NET	RPCs	he current number of sessions currently active <snapshot>

## 4.2.13 The Symfoware folder/Symfoware reports



- Field name sCLInfo of record name RDBPS\_S and field names sCLInfo of record name RDBPS\_R are information collected when the security audit evidence function is effective between Interstage Application Server and Symfoware Server. "----:---" is displayed in case of invalidity.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	RDBS_AR_EM	FJ1010	Used	rdbsar - e -m	Kbytes	The amount of memory being used
			Free	rdbsar - e -m	Kbytes	The amount of unused memory
			Total	rdbsar - e -m	Kbytes	The amount of memory that has been allocated
			emType	rdbsar - e -m		Memory type
resource_data_uwide	RDBS_AR_EL	FJ1011	BiBlock	rdbsar - e -l (-g)		Number of blocks written to the BI log area
			AiBlock	rdbsar - e -l (-g)		Number of blocks written to the AI log area
			BiWrite	rdbsar - e -l (-g)		Number of writes to the BI log area
			AiWrite	rdbsar - e -l (-g)		Number of writes to the AI log area
			IxWrite	rdbsar - e -l (-g)		Number of writes to the index section
			RcpOver	rdbsar - e -l (-g)		Number of times that the recovery log has overflowed
			TrnOver	rdbsar - e -l (-g)		Number of times that the transaction entry has been detected as being in danger of used up
			BiOver	rdbsar - e -l (-g)		Number of times that the BI log area has been detected as being in danger of used up

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			LongTrn	rdbsar - e -l (-g)		Number of times that long transactions have been detected
			BufReq	rdbsar - e -l (-g)		Number of requests sent to buffer control
			ArcReq	rdbsar - e -l (-g)		Number of requests sent to archive control
			DirReq	rdbsar - e -l (-g)		Number of RDB directory update requests made in order to reduce the size of the effective AI log
			IxReq	rdbsar - e -l (-g)		Number of log index section rewrites made in order to reduce the size of the effective AI log
			StqReq	rdbsar - e -l (-g)		Number of write requests sent from buffer control to the BI log
			EmpBI	rdbsar - e -l (-g)	Kbytes	Current amount of free BI logs
			EmpAI	rdbsar - e -l (-g)	Kbytes	Current amount of free AI logs
			EmpEntry	rdbsar - e -l (-g)		Current number of free transaction entries
			PostBI	rdbsar - e -l (-g)		Number of BI log write completion synchronization requests from transactions
			PostAI	rdbsar - e -l (-g)		Number of AI log write completion synchronization requests from transactions
			DryBI	rdbsar - e -l (-g)		Number of times that the entire area of a cyclic BI log buffer cycles without anything having been written to it
			DryAI	rdbsar - e -l (-g)		Number of times that the entire area of a cyclic AI log buffer cycles without anything having been written to it
			DryAIArc	rdbsar - e -l (-g)		Number of times that the entire area of a cyclic AI log buffer cycles without anything having been written to the archive log
			elLogGroupName	rdbsar - e -l (-g)		The log group name for the temporary log file or archive log file where performance data has been collected
resource_data_wide	RDBS AR_EB	FJ1012	ebPgSize	rdbsar - e -b	bytes	Page size
			ebBufNum	rdbsar - e -b	Page	Total number of buffers
			ebUseNum	rdbsar - e -b	Page	Number of buffers used
			ebWpPage	rdbsar - e -b	Page	Number of pages written to the database
			ebTbPage	rdbsar - e -b	Page	Number of pages flushed from the database

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			Alarm	rdbsar - e -b		Number of times that buffer usage reached the critical rate for the buffer pool
			ebHitRate	rdbsar - e -b	%	Percentage of times that the page accessed was in the buffer
			DryUp	rdbsar - e -b		Number of times that there were no free buffers in the buffer pool
			MinFree	rdbsar - e -b	Page	Recent minimum number of free buffers
			ebBpName	rdbsar - e -b		Buffer pool name
resource_data_wide	RDBS AR_ED	FJ1014	RTimes	rdbsar - e -d		Number of reads from pages
			WTimes	rdbsar - e -d		Number of writes to pages
			Rpage	rdbsar - e -d	Page	Number of pages read
			Wpage	rdbsar - e -d	Page	Number of pages written
			SystemRead	rdbsar - e -d	milliseconds	Time taken from when a read processing request was made to the reader until processing completed
			ServiceRead	rdbsar - e -d	milliseconds	Time taken from when the reader started read processing until processing completed
			SystemWrite	rdbsar - e -d	milliseconds	Time taken from when a write processing request was made to the writer until processing completed
			ServiceWrite	rdbsar - e -d	milliseconds	Time taken from when the writer started write processing until processing completed
			edDBName	rdbsar - e -d		Database name
			edDBSpaceName	rdbsar - e -d		Database space name
			DeviceName	rdbsar - e -d		Device name
resource_data	RDBS AR_AGE	FJ1015	Write	rdbsar - a		Number of blocks written from the archive log buffer to the archive log file
			IONUM	rdbsar - a		Number of I/Os written from the archive log buffer to the archive log file
			ageLogGroupName	rdbsar - a		Log group name
resource_data_uwide	RDBPS _S	FJ1017	sPid	rdbps - s/sp		Process ID
			sElapse	rdbps - s/sp	time	Time elapsed since connecting to the RDB
			T_BIND	rdbps - s/sp	time	Time spent translating

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			EXEETIME	rdbps - s/sp	time	Time spent executing
			COMTIME	rdbps - s/sp	time	Time spent communicating
			ACCTBL	rdbps - s/sp		Number of tables accessed
			REQCOM	rdbps - s/sp		Number of communication requests
			REALCOM	rdbps - s/sp		Number of actual communications
			REQFET	rdbps - s/sp		Number of data return requests
			REALFET	rdbps - s/sp		Number of actual data return communications
			CUROPL	rdbps - s/sp		Number of OPLs held
			MAXOPL	rdbps - s/sp		Maximum number of OPLs held
			TOTALEXEC	rdbps - s/sp		Number of times SQL statements have been executed
			INSEEXEC	rdbps - s/sp		Number of times INSERT statements have been executed
			UPDEXEC	rdbps - s/sp		Number of times UPDATE statements have been executed
			DELEXEC	rdbps - s/sp		Number of times DELETE statements have been executed
			SELEXEC	rdbps - s/sp		Number of times SELECT statements have been executed
			OPNEXEC	rdbps - s/sp		Number of times OPEN statements have been executed
			CALEXEC	rdbps - s/sp		Number of times CALL statements have been executed
			TOTALBIND	rdbps - s/sp		Number of times SQL statements have been translated
			INSBIND	rdbps - s/sp		Number of times INSERT statements have been translated
			UPDBIND	rdbps - s/sp		Number of times UPDATE statements have been translated
			DELBIND	rdbps - s/sp		Number of times DELETE statements have been translated
			SELBIND	rdbps - s/sp		Number of times SELECT statements have been translated
			OPNBIND	rdbps - s/sp		Number of times OPEN statements have been translated
			CALBIND	rdbps - s/sp		Number of times CALL statements have been translated



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			FILESORT	rdbps - s/sp		Number of times that sorting has been used by external files
			TOTALSORT	rdbps - s/sp		Total number of times that sorting has been used
			MAXSORT	rdbps - s/sp	Kbytes	Maximum size of the sort area
			FILEWORK	rdbps - s/sp		Number of times that work tables have been used by external files
			TOTALWORK	rdbps - s/sp		Total number of times that work tables have been used
			MAXWORK	rdbps - s/sp	Kbytes	Maximum size of work tables
			MEM	rdbps - s/sp	Kbytes	The amount of memory being used
			PARASQL	rdbps - s/sp		Number of times that SQL statements have been executed with parallel specifications
			CURPARACNT	rdbps - s/sp		Current number of concurrent processes per section
			MAXPARACNT	rdbps - s/sp		Maximum number of concurrent processes per section
			sModuleName	rdbps - s/sp		Module name
			sUid	rdbps - s/sp		Login name
			sStatus	rdbps - s/sp		Operating status
			sType	rdbps - s/sp		Client process type
			sCLInfo	rdbps - s/sp		Client information: Action information.
resource_data_wide	RDBPS_R	FJ1018	rPid	rdbps -r		Process ID
			rElapse	rdbps -r	time	Time elapsed since connecting to the RDB
			rDeadLock	rdbps -r		Number of times the process has deadlocked
			rLockWait	rdbps -r		Number of times the process has had to wait for exclusive use of resources
			rWaitTime	rdbps -r	time	Total time spent waiting for exclusive use of resources
			rReadIndex	rdbps -r		Number of times the index was searched
			rWriteIndex	rdbps -r		Number of times the index was updated
			rReadPage	rdbps -r		Number of times page reads were requested
			rWritePage	rdbps -r		Number of times page writes were requested
			rReadRecord	rdbps -r		Number of times the record was searched
			rWriteRecord	rdbps -r		Number of times the record was updated

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			rModuleName	rdbps -r		Module name
			rUid	rdbps -r		Login name
			rStatus	rdbps -r		Operating status
			rType	rdbps -r		Client process type
			rCLInfo	rdbps -r		Process ID
resource_data	RDBSPCINF_PD	FJ1020	Static	rdbspcinf -p/-d	Kbytes	Amount of database space allocated statically
			Dynamic	rdbspcinf -p/-d	Kbytes	Amount of database space allocated dynamically
			FreeSize	rdbspcinf -p/-d	Kbytes	Amount of free database space
			pdDBName	rdbspcinf -p/-d		Database name
			pdDBSpaceName	rdbspcinf -p/-d	name	Database space name
resource_data_twide	RDBINF_AP	FJ1021	apUsed	rdbinf -a -p	%	Percentage of database space used
			apFree	rdbinf -a -p	%	Percentage of free database space
			apSize	rdbinf -a -p		Size of the database space
			apDBName	rdbinf -a -p		Database name
			apDBSpaceName	rdbinf -a -p		Database space name
			apCondition	rdbinf -a -p		Database usage status and DSI usage status
			apStateK	rdbinf -a -p		Type of operational information that has been set in the database space
			apStateT	rdbinf -a -p		Setting target of operational information that has been set in the database space
			apCause	rdbinf -a -p		Reason why operational information was set
resource_data	RDBSAR_ER	FJ1013	erPgSize	rdbsar -e -r	bytes	Page size
			erBufNum	rdbsar -e -r		Total number of buffers
			erUseNum	rdbsar -e -r		Number of active buffers for each DSI
			Rate	rdbsar -e -r	%	Percentage of active buffers to the total number of buffers for each DSI
			erWpPage	rdbsar -e -r		Number of pages within a DSI that have been written to the database

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			erTbPage	rdbsar - e -r		Number of pages within a DSI that have been flushed from the database
			erHitRate	rdbsar - e -r	%	Percentage of times that the page accessed in the DSI was in the buffer for each DSI
			BpName	rdbsar - e -r		Buffer pool name
			erDBName	rdbsar - e -r		Database name
			erDSIName	rdbsar - e -r		DSI name
			TypeName	rdbsar - e -r		DSI type
resource_data	RDBS_AR_EC	FJ1016	SendCnt	rdbsar - e -c		Number of times data was sent to an RDB system on another node
			RevCnt	rdbsar - e -c		Number of times data was received from an RDB system on another node
			SendQtty	rdbsar - e -c	Bytes	Amount of data sent to an RDB system on another node
			RecvQtty	rdbsar - e -c	Bytes	Amount of data received from an RDB system on another node
			System	rdbsar - e -c		The name of the RDB system with which data is being exchanged
resource_data_tt_wide	RDBPS_IA	FJ1019	iaPid	rdbps - ia		Process ID
			iaElapse	rdbps - ia		Time elapsed since connecting to the RDB
			iaDeadLock	rdbps - ia		Number of times the process has deadlocked
			iaLockWait	rdbps - ia		Number of times the process has had to wait for exclusive use of resources
			iaWaitTime	rdbps - ia		Total time spent waiting for exclusive use of resources
			iaReadIndex	rdbps - ia		Number of times the index was searched
			iaWriteIndex	rdbps - ia		Number of times the index was updated
			iaReadPage	rdbps - ia		Number of times page reads were requested
			iaWritePage	rdbps - ia		Number of times page writes were requested
			iaReadRecord	rdbps - ia		Number of times the record was searched
			iaWriteRecord	rdbps - ia		Number of times the record was updated
			iaModuleName	rdbps - ia		Module name

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			iaUid	rdbps - ia		Login name
			iaStatus	rdbps - ia		Operating status
			iaType	rdbps - ia		Client process type
			iaDBName	rdbps - ia		Database name
			iaDSIName	rdbps - ia		DSI name
			iaCLInfo	rdbps - ia		Client information.
resource_data_twide	RDBIN F_AI	FJ1022	aiUsed	rdbinf - a -i	%	Percentage of used DSI for each allocation target
			aiFree	rdbinf - a -i	%	Percentage of free DSI for each allocation target
			aiSize	rdbinf - a -i	bytes	Size of the DSI for each allocation target and size of the DSI allocated from the database space for each allocation target
			aiDBName	rdbinf - a -i		Database name
			aiDSIName	rdbinf - a -i		DSI name
			aiTypeName	rdbinf - a -i		DSI type
			aiCondition	rdbinf - a -i		DSI usage status and database space usage status
			aiStateK	rdbinf - a -i		Type of operational information that has been set in the database space
			aiStateT	rdbinf - a -i		Setting target of operational information that has been set in the database space
			aiCause	rdbinf - a -i		Reason why operational information was set

#### 4.2.14 The Oracle folder/Oracle reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	ORA_I O	1028	phywrt	ora	writes	Number of physical write operations
			blkchg	ora	changes	Number of database block changes
			blkget	ora	gets	Number of database blocks acquired
			phyread	ora	reads	Number of physical read operations
			wrtreq	ora	writes	Number of write requests
			congets	ora	gets	Consistent reads

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	ORA_QUEUE	1029	enqtmout	ora	timeouts	Number of enqueue operations that have timed out
			enqwt	ora	waits	Number of enqueue operation waits
			enqddlks	ora	deadlocks	Number of enqueue operation deadlocks
			enqrqt	ora	requests	Number of enqueue operation requests
			enqrls	ora	releases	Number of enqueue operation releases
resource_data	ORA_RETR	1031	shtblscn	ora	scans	Number of table scans - shorttables
			lgtblscn	ora	scans	Number of table scans - longtables
			ctrscngt	ora	gets	Number of cluster key scan blocks acquired
			cltrscn	ora	scans	Number of cluster key scans
			memsrt	ora	sorts	Number of sorts - memory
			dksrt	ora	sorts	Number of sorts - disk
			rowsrt	ora	sorts	Number of sorts - lines
resource_data	ORA_TSS	1032	tsall	ora	Mbytes	Total space allocated to tables
			tsused	ora	Mbytes	Total space allocated to each table
			tsfree	ora	Mbytes	Total free table space
resource_data	ORA_RC	1038	rcgets	ora	gets	Number of reads from the cache
			rcmisses	ora	misses	Number of failed reads from the cache
resource_data	ORA_LC	1039	lcexec	ora	execs	Number of cache execs
			lcreload	ora	reloads	Number of cache reloads
resource_data	ORA_LT	1040	ltget	ora	gets	Number of latch gets
			ltmiss	ora	misses	Number of latch misses
resource_data	ORA_RBS	1043	rbsexts	ora	extents	Number of extents occupied by rollback segments
			rbsgets	ora	gets	Number of gets obtained by rollback segments
			rbswaits	ora	waits	Number of waits obtained by rollback segments
resource_data	ORA_USR	1027	curlog	ora	logons	Number of users currently logged on
			cumlog	ora	logons	Total number of users that have logged on
			curcсор	ora	cursors	Current number of open cursors
			cumcсор	ora	cursors	Total number of open cursors
			usrmts	ora	commits	Number of user commits
			usrrlbk	ora	rollbacks	Number of user rollbacks
			usrcalls	ora	calls	Number of user calls
resource_data	ORA_MEMORY	1030	ugamem	ora	number	Session UGA memory
			ugamemax	ora	number	Maximum value for section UGA memory
			pgamem	ora	number	Session PGA memory
			pgamemax	ora	number	Maximum value for section PGA memory

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	ORA_TSF	1033	blkall	ora	blocks	Total free space for each table <For dictionary management tablespaces >
			blkavl	ora	blocks	Total available table space <For dictionary management tablespaces>
			tstext	ora	pieces	Number of pieces of the table space fragmented <<For dictionary management tablespaces>
			tstmax	ora	blocks	Size of the biggest fragment <<For dictionary management tablespaces>
			tstmin	ora	blocks	Size of the smallest fragment <<For dictionary management tablespaces>
			tstavg	ora	blocks	Average size of a fragment<<For dictionary management tablespaces>
			tstdead	ora	blocks	Total amount of unusable space <<For dictionary management tablespaces>
resource_data	ORA_OSE	1034	iniext	ora	Kbytes	Total amount of space initially allocated to the object
			nxttext	ora	Kbytes	Total amount of space needed for the next extent of object size
			totsz	ora	Kbytes	Current size of the object
			totext	ora	extents	Total number of extents made
resource_data	ORA_DFS	1035	dfbytes	ora	Mbytes	Amount of space used by Oracle data files
			dfblocks	ora	blocks	Number of blocks used by Oracle data files
			dffile	ora		File ID and data file name
resource_data	ORA_FS	1036	fsbytes	ora	Mbytes	Total amount of space available for table spaces
			fsmbytes	ora	bytes	Maximum amount of space available for table spaces
			fsblocks	ora	blocks	Number of blocks available for table space
resource_data	ORA_SEGS	1037	ssbytes	ora	bytes	Number of DBA segments used
			ssblocks	ora	blocks	Number of blocks for DBA segments
			ssexts	ora	extents r	Number of DBA segment extents
			ssnext	ora	bytes	Size of the next segment
			ssname	ora		Segment name: segment type of the DBA segment
resource_data	ORA_REDO	1041	redoal	ora	redos	Number of redo requests/waits
resource_data	ORA_WAIT	1042	waitval	ora	headers	Number of wait headers
resource_data	ORA_MEM	1044	fmemfree	ora	bytes	Available memory

## 4.2.15 The MS-SQL folder/MS-SQL reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	SQLS_AC CMD	1068	paccis	MSSQL	searches	Number of scans of index per second (count)<total>
			paccfs	MSSQL	scans	Number of full scans of table or index per second (count)<total>
			paccfss	MSSQL	scans	Number of scans of free space for adding a new record fragment (count)<total>
			sqls_ac cmd_o bjname	MSSQL		Performance counter object name
			sqls_ac cmd_ap pname	MSSQL		SQL Server Instance name
resource_data_ wide	SQLS_BF MGR	1069	pbmcbh	MSSQL	hits	Buffer Cache Hits (count)<total>
			pbmcbhb	MSSQL	Accesses	Buffer Cache Hits Base (count)<total>
			pbmchw	MSSQL	pages	Checkpoint Pages (count)<total>
			pbmprd	MSSQL	reads	Page Reads (count)<total>
			pbmpwr	MSSQL	writes	Page Writes (count)<total>
			pbmosp	MSSQL	pages	Target Pages (count)<total>
			pbmtpg	MSSQL	pages	Total Page Count (snapshot)<total>
			sqls_bf mgr_ob jname	MSSQL		Performance counter object name
sqls_bf mgr_ap pname	MSSQL		SQL Server Instance name			
resource_data	SQLS_CM GR	1070	pcmchr	MSSQL	hits	Cache Hit Ratio (count)<total>
			pcmchr b	MSSQL	hits	Cache Hits Ration Base (count)<total>
			sqls_c mgr_ob jname	MSSQL		Performance counter object name
			sqls_c mgr_ap pname ~	MSSQL		SQL Server Instance name
resource_data_ wide	SQLS_DB	1071	pdbat	MSSQL	transactions	Active Transactions (snapshot)<total>
			pdblft	MSSQL	milliseconds	Log Flush Wait Time (snapshot)<total>
			pdblfr	MSSQL	waits	Log Flush Waits (count)<total>
			pdblplu	MSSQL	percent	Percent Log Used (count)<total>

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			pdotra	MSSQL	transactions	Transactions (count)<total>
			sqls_db_objname	MSSQL		Performance counter object name
			sqls_gs_appname~	MSSQL		SQL Server Instance name
resource_data	SQLS_GS	1072	pgsuc	MSSQL	connections	User Connections (snapshot)<average>
			sqls_gs_objname	MSSQL		Performance counter object name
			sqls_lo_appname~	MSSQL		SQL Server Instance name
resource_data	SQLS_LO	1074	plolwt	MSSQL	milliseconds	Lock Wait Time (ms) (count)<total>
			plolws	MSSQL	waits	Lock Waits (count)<total>
			plodlk	MSSQL	Deadlocks	Number of Deadlocks (count)<total>
			sqls_lo_objname	MSSQL		Performance counter object name
			sqls_lo_appname~	MSSQL		SQL Server Instance name
resource_data	SQLS_MGR	1075	pmmtm	MSSQL	KBs	Total Server Memory (KB) (snapshot)<total>
			sqls_mgr_objname	MSSQL		Performance counter object name
			sqls_mgr_appname			SQL Server Instance name
resource_data	SQLS_STATS	1098	pstatrc	MSSQL	re-compilations	SQL Re-Compilations (count) <total>
			pstatbr	MSSQL	requests	Batch Requests (count) <total>
			sqls_stats_objname	MSSQL		Performance counter object name
			sqls_stats_appname	MSSQL		SQL Server Instance name

#### 4.2.16 No data/CentricManager reports



Table name	Record ID	Field Name	Source	Unit of Measure	Description
resource_data	CEN_NO_INBND_OC	cibdocavg	F3crTrfB csv	number	Accumulate number of inbound octets
		cibdocmax	F3crTrfB csv	number	Maximum number of inbound octets
		cibdocmin	F3crTrfB csv	number	Minimum number of inbound octets
resource_data	CEN_NO_INBND_PAC	cibdpacavg	F3crTrfB csv	number	Accumulate number of inbound packets
		cibdpacmax	F3crTrfB csv	number	Maximum number of inbound packets
		cibdpacmin	F3crTrfB csv	number	Minimum number of inbound packets
resource_data	CEN_NO_OUTBND_OC	cobdocavg	F3crTrfB csv	number	Accumulate number of outbound octets
		cobdocmax	F3crTrfB csv	number	Maximum number of outbound octets
		cobdocmin	F3crTrfB csv	number	Minimum number of outbound octets
resource_data	CEN_NO_OUTBND_PAC	cobdpacavg	F3crTrfB csv	number	Accumulate number of outbound packets
		cobdpacmax	F3crTrfB csv	number	Maximum number of outbound packets
		cobdpacmin	F3crTrfB csv	number	Minimum number of outbound packets
resource_data	CEN_PRCNT_DSCRD_PAC	cpdscpacavg	F3crTrfB csv	percent	Average discard packet rate
		cpdscpacmax	F3crTrfB csv	percent	Maximum discard packet rate
		cpdscpacmin	F3crTrfB csv	percent	Minimum discard packet rate
resource_data	CEN_PRCNT_ERR_PAC	cperrpacavg	F3crTrfB csv	percent	Average error packet rate
		cperrpacmax	F3crTrfB csv	percent	Maximum error packet rate
		cperrpacmin	F3crTrfB csv	percent	Minimum error packet rate
resource_data	CEN_PRCNT_INTRFC_USAGE	cpintusgavg	F3crTrfB csv	percent	Average interface usage rate
		cpintusgmax	F3crTrfB csv	percent	Maximum interface usage rate
		cpintusgmin	F3crTrfB csv	percent	Minimum interface usage rate

#### 4.2.17 The OperationMGR folder/OperationManager reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	JLA_AGT	FJ1057	maxjobagt	jla	jobs	Job concurrency per Agent
			maxothjobagt	jla	jobs	Number of concurrent network/distributed execution jobs per Agent (that were received)
			maxwjobagt	jla	jobs	Number of jobs awaiting execution per Agent
			ovtmjobagt	jla	jobs	Number of jobs with execution time overruns per Agent
resource_data	JLA_AGT2	FJ1361	jobnumagt	jla	jobs	Number of jobs ended per Agent
			errorjobnumagt	jla	jobs	Number of error jobs per Agent
resource_data	JLA_PRJ	FJ1056	maxjobprj	jla	jobs	Job concurrency per project
			maxjnetprj	jla	jobnets	Job net concurrency per project
			maxwjobprj	jla	jobs	Number of jobs awaiting execution per project
			maxwtmprj	jla	seconds	Job execution wait time per project
			ovtmjobprj	jla	jobs	Number of jobs with execution time overruns per project
resource_data	JLA_PRJ2	FJ1360	jobnumprj	jla	jobs	Number of jobs ended per project
			errorjobnumprj	jla	jobs	Number of error jobs per project
resource_data	JLA_QUE	FJ1055	maxjobque	jla	jobs	Job concurrency per queue
			maxothjobque	jla	jobs	Number of concurrent network/distributed execution jobs per queue (that were received)
			maxjnetque	jla	jobnets	Job net concurrency per queue
			maxwjobque	jla	jobs	Number of jobs awaiting execution per queue
			maxwtmque	jla	seconds	Job execution wait time per queue
			ovtmjobque	jla	jobs	Number of jobs with execution time overruns per queue
resource_data	JLA_SUB	FJ1054	maxjobsub	jla	jobs	Job concurrency per subsystem

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			maxoth jobsub	jla	jobs	Number of concurrent network/ distributed execution jobs per subsystem (that were received)
			maxjne tsub	jla	jobnets	Job net concurrency per subsystem
			maxwj obsub	jla	jobs	Number of jobs awaiting execution per subsystem
			maxwt msub	jla	seconds	Job execution wait time per subsystem
			ovtmjo bsub	jla	jobs	Number of jobs with execution time overruns per subsystem
resource_ data	JLA_SU B2	FJ1359	jobnum sub	jla	jobs	Number of jobs ended per subsystem
			errorjo bnumsu b	jla	jobs	Number of error jobs per subsystem

#### 4.2.18 No data/Systemwalker Network Manager reports

Table name	Record ID	Field Name	Source	Unit of Measure	Description
resource_d ata	SNM_IPOPE RATION	noprtr	nmLogTo Sq	percent	Operating rates (%)
		ndwntm	nmLogTo Sq		Downtime (sec)
		ndwncnt	nmLogTo Sq		Number of system failures
resource_d ata	SNM_RTT	nrttav	nmLogTo Sq	msec	Mean RTT (msec)
		nrttmax	nmLogTo Sq	msec	Maximum RTT (msec)
		npnglstr	nmLogTo Sq	percent	Mean ping loss rate (%)
		npnglstrtmax	nmLogTo Sq	percent	Maximum ping loss rate (%)
resource_d ata	SNM_CPUB USY	ncpurate	nmLogTo Sq		Average CPU usage rate
		ncpuratemax	nmLogTo Sq		Maximum CPU usage rate
		ncpuratemin	nmLogTo Sq		Minimum CPU usage rate
		ncpuratemax m	nmLogTo Sq	time	Date and time of maximum CPU usage rate
		ncpuratemintm	nmLogTo Sq	time	Date and time of minimum CPU usage rate

Table name	Record ID	Field Name	Source	Unit of Measure	Description
resource_data	SNM_DROP_PACKET	nidrpct	nmLogTo Sqc		Mean number of input drop packets
		nidrpctmax	nmLogTo Sqc		Maximum number of input drop packets
		nidrpctmin	nmLogTo Sqc		Minimum number of input drop packets
		nodrpct	nmLogTo Sqc		Mean number of output drop packets
		nodrpctmax	nmLogTo Sqc		Maximum number of output drop packets
		nodrpctmin	nmLogTo Sqc		Minimum number of output drop packets
		nidrpctmaxtm	nmLogTo Sqc	time	Date and time of maximum number of input drop packets
		nidrpctmintm	nmLogTo Sqc	time	Date and time of minimum number of input drop packets
		nodrpctmaxtm	nmLogTo Sqc	time	Date and time of maximum number of output drop packets
		nodrpctmintm	nmLogTo Sqc	time	Date and time of minimum number of output drop packets
resource_data	SNM_CRCE_ERROR	ncrcerror	nmLogTo Sqc		Mean number of CRC errors
		ncrcerrormax	nmLogTo Sqc		Maximum number of CRC errors
		ncrcerrormin	nmLogTo Sqc		Minimum number of CRC errors
		ncrcerrormaxtm	nmLogTo Sqc	time	Date and time of maximum number of CRC errors
		ncrcerrormintm	nmLogTo Sqc	time	Date and time of minimum number of CRC errors
resource_data	SNM_COLLISION	ncollision	nmLogTo Sqc		Average number of collisions
		ncollisionmax	nmLogTo Sqc		Maximum number of collisions
		ncollisionmin	nmLogTo Sqc		Minimum number of collisions
		ncollisionmaxtm	nmLogTo Sqc	time	Date and time of maximum number of collisions
		ncollisionmintm	nmLogTo Sqc	time	Date and time of minimum number of collisions
resource_data	SNM_NTWKTRAFFIC	ninwtfc	nmLogTo Sqc		Average input traffic rate
		ninwtfcmax	nmLogTo Sqc		Maximum input traffic rate
		ninwtfcmin	nmLogTo Sqc		Minimum input traffic rate

Table name	Record ID	Field Name	Source	Unit of Measure	Description
		nonwtfc	nmLogTo Sq		Average output traffic rate
		nonwtfcmax	nmLogTo Sq		Maximum output traffic rate
		nonwtfcmin	nmLogTo Sq		Minimum output traffic rate
		ninwtfcmaxtm	nmLogTo Sq	time	Date and time of maximum input traffic rate
		ninwtfcmintm	nmLogTo Sq	time	Date and time of minimum input traffic rate
		nonwtfcmaxtm	nmLogTo Sq	time	Date and time of maximum output traffic rate
		nonwtfcmintm	nmLogTo Sq	time	Date and time of minimum output traffic rate
resource_data	SNM_NTW KPKT	ninwpkt	nmLogTo Sq	pps	Mean number of input packets (pps)
		ninwpktmax	nmLogTo Sq	pps	Maximum number of input packets (pps)
		ninwpktmin	nmLogTo Sq	pps	Minimum number of input packets (pps)
		nonwpkt	nmLogTo Sq	pps	Mean number of output packets (pps)
		nonwpktmax	nmLogTo Sq	pps	Maximum number of output packets (pps)
		nonwpktmin	nmLogTo Sq	pps	Minimum number of output packets (pps)
		ninwpktmaxtm	nmLogTo Sq	time	Date and time of maximum number of input packets (pps)
		ninwpktmintm	nmLogTo Sq	time	Date and time of minimum number of input packets (pps)
		nonwpktmaxtm	nmLogTo Sq	time	Date and time of maximum number of output packets (pps)
		nonwpktmintm	nmLogTo Sq	time	Date and time of minimum number of output packets (pps)
resource_data	SNM_NTW KDCDPKT	ninwdcd	nmLogTo Sq		Mean number of input discard packets
		ninwdcdmax	nmLogTo Sq		Maximum number of input discard packets
		ninwdcdmin	nmLogTo Sq		Minimum number of input discard packets
		nonwdcd	nmLogTo Sq		Mean number of output discard packets
		nonwdcdmax	nmLogTo Sq		Maximum number of output discard packets
		nonwdcdmin	nmLogTo Sq		Minimum number of output discard packets

Table name	Record ID	Field Name	Source	Unit of Measure	Description
		ninwdcdmaxtm	nmLogTo Sq	time	Date and time of maximum number of input discard packets
		ninwdcdmintm	nmLogTo Sq	time	Date and time of minimum number of input discard packets
		nonwdcdmaxtm	nmLogTo Sq	time	Date and time of maximum number of output discard packets
		nonwdcdmintm	nmLogTo Sq	time	Date and time of minimum number of output discard packets
resource_data	SNM_NTW KERRPKT	ninwerr	nmLogTo Sq		Average number of input error packets
		ninwerrmax	nmLogTo Sq		Maximum number of input error packets
		ninwerrmin	nmLogTo Sq		Minimum number of input error packets
		nonwerr	nmLogTo Sq		Average number of output error packets
		nonwerrmax	nmLogTo Sq		Maximum number of output error packets
		nonwerrmin	nmLogTo Sq		Minimum number of output error packets
		ninwerrmaxtm	nmLogTo Sq	time	Date and time of maximum number of input error packets
		ninwerrmintm	nmLogTo Sq	time	Date and time of minimum number of input error packets
		nonwerrmaxtm	nmLogTo Sq	time	Date and time of maximum number of output error packets
		nonwerrmintm	nmLogTo Sq	time	Date and time of minimum number of output error packets

#### 4.2.19 The TcpNetwork folder/TcpNetwork reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_u wide	TCPST AT	FJ1002	Opkts	tcpstat	number	Number of packets sent
			tcp_opkts	tcpstat	number	Number of packets sent using TCP
			Osize	tcpstat	number	Size of packets sent
			tcp_ose	tcpstat	number	Size of packets sent using TCP
			Ipkts	tcpstat	number	Number of packets received
			tcp_ipkts	tcpstat	number	Number of packets received using TCP
			Isize	tcpstat	number	Size of packets received
			tcp_ise	tcpstat	number	Size of packets received using TCP
			Bcast	tcpstat	number	Number of broadcast packets received
Odup	tcpstat	%	Resend rate (percentage of connections in which an error has been detected)			

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			nOdup	tcpstat	number	Number of resends
			Idup	tcpstat	%	Duplicated reception rate (percentage of connections in which an error has been detected)
			nIdup	tcpstat	number	Number of duplicated receptions
			llost	tcpstat	%	Packet loss rate (percentage of connections in which an error has been detected)
			nlost	tcpstat	number	Number of packet losses
			MinOack	tcpstat	number	Minimum value for the acknowledgement status of the local node
			MaxOack	tcpstat	number	Maximum value for the acknowledgement status of the local node
			nOack	tcpstat	number	Relative value for the acknowledgement status of the local node based on the standard response time
			MinIack	tcpstat	number	Minimum value for the acknowledgement status of the other node
			MaxIack	tcpstat	number	Maximum value for the acknowledgement status of the other node
			nIack	tcpstat	number	Relative value for the acknowledgement status of the other node based on the standard response time
			Town	tcpstat	number	Number of times a problem with the local node has been recognized and output to syslog
			Tnei	tcpstat	number	Number of times a problem with the network (including the adjacent network) has been recognized and output to syslog
			Tnet	tcpstat	number	Number of times a problem with the non-adjacent network has been recognized and output to syslog
			Trem	tcpstat	number	Number of times a problem with the other node (or the network connected to it) has been recognized and output to syslog

#### 4.2.20 The StorageResource folder/Storage reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	SSC_CM	FJ1059	cmcpurate	sc_perf_stat	percent	CPU usage rate of CM
resource_data_wide	SSC_OLU	FJ1060	oluiopsrd	sc_perf_stat	IO/s	LUN IOPS (read)
			oluiopswt	sc_perf_stat	IO/s	LUN IOPS (write)
			oluthputrd	sc_perf_stat	MB/s	LUN read throughput

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			oluthputwt	sc_perf_stat	MB/s	LUN write throughput
			olurtime	sc_perf_stat	msec	LUN read response time
			olurtime	sc_perf_stat	msec	LUN write response time
			oluhitrate	sc_perf_stat	percent	LUN read cache hit rate
			oluhitrate	sc_perf_stat	percent	LUN write cache hit rate
			oluprihitrate	sc_perf_stat	percent	LUN read Prifetticassshuhit rate
resource_data_wide	SSC_RLU	FJ1061	rluiopstd	sc_perf_stat	IO/s	RAIDGroup IOPS (read)
			rluiopswt	sc_perf_stat	IO/s	RAIDGroup IOPS (write)
			rluthputrd	sc_perf_stat	MB/s	RAIDGroup read throughput
			rluthputwt	sc_perf_stat	MB/s	RAIDGroup write throughput
			rlurtime	sc_perf_stat	msec	RAIDGroup read response time
			rlurtime	sc_perf_stat	msec	RAIDGroup write response time
			rluhitrate	sc_perf_stat	percent	RAIDGroup read cache hit rate
			rluhitrate	sc_perf_stat	percent	RAIDGroup write cache hit rate
resource_data	SSC_PLU	FJ1062	pluserate	sc_perf_stat	percent	Disk usage rate
resource_data	SSC_SWITCH	FJ1063	swdraterd	sc_perf_stat	Mbyte/s	Amount of read data transferred via port
			swdratewt	sc_perf_stat	Mbyte/s	Amount of write data transferred via port
			swceerror	sc_perf_stat	number	CRC errors
resource_data_wide	SSC_NASINF(*1)	FJ1327	nascpubusy	sc_perf_stat	percent	Total CPU busy rate for device
			nasnfopss	sc_perf_stat	OPS/s	Total NFS processing performance for device
			nascifopss	sc_perf_stat	OPS/s	Total CIFS processing performance for device
			nashttpopss	sc_perf_stat	OPS/s	Total HTTP processing performance for device
			nasntwinkbs	sc_perf_stat	Kbyte/s	Total amount of network input data for device



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			nasntwotkbs	sc_perf_stat	Kbyte/s	Total amount of network output data for device
			nasdskrdkbs	sc_perf_stat	Kbyte/s	Total amount of data read from disk for device
			nasdskwtkbs	sc_perf_stat	Kbyte/s	Total amount of data written to disk for device
			nastperdkbs	sc_perf_stat	Kbyte/s	Total amount of data read from tape for device
			nastpewtkbs	sc_perf_stat	Kbyte/s	Total amount of data written to tape for device
			nasbfcherob	sc_perf_stat	Minute	Total amount of time the oldest Read Only Block remains in buffer cache for device
resource_data	SSC_CM_ROE(*2)	FJ1338	roecpurate	sc_perf_stat	percent	CPU usage rate of CM (ROE)

\*1 Records "SSC\_NASINF" are performance information for ETERNUS NR1000F series monitored by ETERNUS SF Storage Cruiser.

\*2: Records "SSC\_CM\_ROE" are not collected for ETERNUS equipped without ROE(RAID Offload Engine).

#### 4.2.21 The Resource Orchestrator folder/Pool(Demand Prediction) reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_wide	ROR_VMPOOLCPU	FJ1415	vmppoolprocpcent	ROR	percent	CPU usage rate for VMPOOL
			vmppoolprocused	ROR	GHz	CPU usage for VMPOOL
			vmppoolprocfree	ROR	GHz	Available CPU amount for VMPOOL
			vmppoolproctotal	ROR	GHz	Total CPU amount for VMPOOL
			vmppoolpriority	ROR	number	Priority of VMPOOL
			vmppoolprocmaxnumassigned	ROR	GHz	Maximum CPU amount that can be specified
			vmppoolproctenant	ROR	name	Name of tenant for VMPOOL
resource_data_wide	ROR_VMPOOLMEM	FJ1416	vmppoolmempcent	ROR	percent	Memory usage rate for VMPOOL
			vmppoolmemused	ROR	GByte	Memory usage for VMPOOL
			vmppoolmemfree	ROR	GByte	Available memory for VMPOOL
			vmppoolmemtotal	ROR	GByte	Total memory for VMPOOL
			vmppoolpriority	ROR	number	Priority of VMPOOL
			vmppoolmemmaxnumassigned	ROR	GByte	Maximum memory that can be specified
			vmppoolmemtenant	ROR	name	Name of tenant for VMPOOL
resource_data_wide	ROR_STORAGEPOOL	FJ1417	vmppoolstoragepercent	ROR	percent	Usage rate for StoragePool

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			vmpoolstorageused	ROR	GByte	Usage for StoragePool
			vmpoolstoragefree	ROR	GByte	Amount of free StoragePool area
			vmpoolstoragetotal	ROR	GByte	Total StoragePool area
			vmpoolpriority	ROR	number	Priority of StoragePool
			vmpoolstoragetenant	ROR	name	Name of tenant for StoragePool
resource_data_wide	ROR_NETWORKPOOL	FJ1418	vmpoolnetworkpercent	ROR	percent	Usage rate for NetworkPool
			vmpoolnetworkused	ROR	number	Number of used addresses for NetworkPool
			vmpoolnetworkfree	ROR	number	Number of unused addresses for NetworkPool
			vmpoolnetworktotal	ROR	number	Total number of addresses for NetworkPool
			vmpoolnetworktenant	ROR	name	Name of tenant for NetworkPool
resource_data_wide	ROR_SERVERPOOL	FJ1419	vmpoolserverpercent	ROR	percent	Usage rate for ServerPool
			vmpoolserverused	ROR	number	Number of used servers for ServerPool
			vmpoolserverfree	ROR	number	Number of free servers for ServerPool
			vmpoolservertotal	ROR	number	Total number of servers for ServerPool
			vmpoolservertenant	ROR	name	Name of tenant for ServerPool
resource_data_wide	ROR_ADDRESSPOOL	FJ1420	vmpooladdresspercent	ROR	percent	Usage rate for AddressPool
			vmpooladdressused	ROR	number	Number of used addresses for AddressPool
			vmpooladdressfree	ROR	number	Number of unused addresses for AddressPool
			vmpooladdresstotal	ROR	number	Total number of addresses for AddressPool
			vmpooladdresstenant	ROR	name	Name of tenant for AddressPool

#### 4.2.22 The SAP folder/SAP reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_wide	R3_ENQREQ	FJ1310	R3enreq	SAP CCMS	/sec	Number of enqueue requests (enqueue operations)

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			R3enqreqrej	SAP CCMS	/sec	Number of refused enqueue requests
			R3enqreqerr	SAP CCMS	/sec	Number of errors that occurred when enqueue requests were made
			R3deqreq	SAP CCMS	/sec	Number of dequeue requests
			R3deqreqerr	SAP CCMS	/sec	Number of errors that occurred when dequeue requests were made
			R3deqreqall	SAP CCMS	/sec	Number of dequeue requests during all operations (LUW completion, etc.)
			R3cleanupreq	SAP CCMS	/sec	Total number of locks released in application server (during shutdown, startup, etc.)
			R3bkupreq	SAP CCMS	/sec	Number of update calls for which locks were forwarded to the update. The update process receives the lock owner ID of the caller, the caller receives a new lock owner ID.
			R3reqread	SAP CCMS	/sec	Number of lock table read operations
			R3update	SAP CCMS		Current number of unprocessed updates accompanying locks
			R3locktime	SAP CCMS	s	Time used by lock operations in the lock table (in seconds per minute)
			R3lockwait	SAP CCMS	s	Wait time for parallel processes prior to locking in the lock table (in seconds per minute)
			R3svrtime	SAP CCMS	s	Total time used by locks on the server side (in seconds per minute)
			R3runtimedc	SAP CCMS	s	Execution time of data collector (program: RSCOLL00)
resource_data	R3_ENQL EN	FJ1311	R3enqutilon	SAP CCMS	%	The usage rates for lock owners within lock tables
			R3enqutilga	SAP CCMS	%	The usage rates for lock arguments within lock tables
			R3enqutilge	SAP CCMS	%	The usage rates for elementary locks within lock tables
			R3enquelen	SAP CCMS	%	Enqueue server monitoring objects: Percentage of queue length
			R3enqerr	SAP CCMS		Number of errors in enqueue work processes
			R3enqerrfreq	SAP CCMS	/min	Number of errors per minute in enqueue work processes
			R3enqended	SAP CCMS		Number of completed enqueue work processes

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_vwide	R3_DIALOG	FJ1312	R3diarecpt	SAP CCMS	msec	Average response time of dialog service
			R3diafre spt	SAP CCMS	msec	Front-end wait time
			R3diaquet	SAP CCMS	msec	Average dispatcher wait time per dialog step
			R3dialgt	SAP CCMS	msec	Average load/generation time of GUI objects
			R3diarolt	SAP CCMS	msec	Roll time
			R3diadb respt	SAP CCMS	msec	Average processing time of logical database requests
			R3diautil	SAP CCMS	%	Average usage rate of application server dialog processes
			R3diapmodutil	SAP CCMS	%	Percentage of dialog work processes in PRIV mode
			R3diawp num	SAP CCMS		Number of dialog work processes
			R3diawp err	SAP CCMS		Number of dialog work process errors
			R3diawp errf	SAP CCMS	/min	Number of errors per minute in dialog processes
			R3diawp end	SAP CCMS		Number of completed dialog work processes
			R3diaqu elen	SAP CCMS	%	Average usage rate of dispatcher queue for dialog work processes
			R3dialongrun	SAP CCMS	sec	Average time of long-running dialog work processes
			R3diasteps	SAP CCMS	/min	Average number of dialog steps per minute
			R3diaguibct	SAP CCMS	msec	Average round-trip time during dialog steps
			R3diafenett	SAP CCMS	msec	Average time used by network (excluding round-trips)
			R3diamont	SAP CCMS	msec	Average monitoring time per dialog step
			R3diatxespt	SAP CCMS	msec	CCMS standard transaction: Standard response time
R3dialogin	SAP CCMS		Application server: Number of users logged on			
resource_data_wide	R3_SPOOL	FJ1313	R3splutil	SAP CCMS	%	Load rate of spool work processes
			R3splwp num	SAP CCMS		Number of spool work processes
			R3splwp err	SAP CCMS		Number of errors in spool work processes

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			R3splwperrf	SAP CCMS	/min	Number of errors per minute in spool work processes
			R3splwpend	SAP CCMS		Number of completed spool work processes
			R3splquelen	SAP CCMS	%	Percentage of the area used by dispatcher queue
			R3splsvcque	SAP CCMS	%	Percentage of the area used by spool service queue
			R3splsvcqpriv	SAP CCMS	%	Percentage of the area used by spool request queue for sequential processing
			R3splsvcqpg	SAP CCMS	Pgs	Number of spool request queue pages output
			R3spldcacheu	SAP CCMS	%	Percentage of the area used by entire device cache
			R3spldcachef	SAP CCMS	%	Percentage of the area used by fixed device cache
			R3splhost	SAP CCMS	%	Percentage of the area used by host spool request list
resource_data	R3_BACKGROUND	FJ1314	R3bgutil	SAP CCMS	%	Average usage rate of background work processes for server
			R3bgwpsnum	SAP CCMS		Number of background work processes
			R3bgwperr	SAP CCMS		Number of errors in background work processes
			R3bgwperrf	SAP CCMS	/min	Number of errors per minute in background work processes
			R3bgwpend	SAP CCMS		Number of completed background work processes
			R3bgqueelen	SAP CCMS	Jobs	Number of released jobs awaiting execution
resource_data_wide	R3_UPDATE	FJ1315	R3updrspt	SAP CCMS	msec	SAP update task V1: Average response time per dialog step
			R3updquset	SAP CCMS	msec	SAP update task V1: Average wait time in dispatcher queue
			R3updutill	SAP CCMS	%	SAP update task V1: Load rate of update task work processes
			R3updwpsnum1	SAP CCMS		Number of Update 1 work processes
			R3updwpserr1	SAP CCMS		Number of errors in Update 1 work processes
			R3updwpserrf1	SAP CCMS	/min	Number of errors per minute in Update 1 work processes
			R3updwpsend1	SAP CCMS		Number of completed Update 1 work processes

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			R3updut il2	SAP CCMS	%	SAP update task V2: Load rate of Update 2 task work processes
			R3updw pnum2	SAP CCMS		Number of Update 2 work processes
			R3updw perr2	SAP CCMS		Number of errors in Update 2 work processes
			R3updw perff2	SAP CCMS	/min	Number of errors per minute in Update 2 work processes
			R3updw pend2	SAP CCMS		Number of completed Update 2 work processes
resource_data_wide	R3_ROLL PAGING	FJ1316	R3rppgs z	SAP CCMS	KB	Current size of paging area (KB)
			R3rppgu	SAP CCMS	%	Percentage of paging area currently in use
			R3rppgu kb	SAP CCMS	KB	Percentage of paging area currently in use (KB)
			R3rppgu max	SAP CCMS	KB	Maximum paging area load following system startup (KB)
			R3rproll sz	SAP CCMS	KB	Current size of roll area (KB)
			R3rproll u	SAP CCMS	%	Percentage of roll area currently in use
			R3rproll ukb	SAP CCMS	KB	Percentage of roll area currently in use (KB)
			R3rproll umax	SAP CCMS	KB	Maximum roll area load following system startup (KB)
resource_data_wide	R3_MEM MGMT	FJ1317	R3mmes t	SAP CCMS	MB	Total size of extended memory
			R3mmes peak	SAP CCMS	%	Extended memory: Highest value after final query
			R3mmes act	SAP CCMS	%	Extended memory: Snapshot of write status
			R3mmes att	SAP CCMS	%	Amount of extended memory in user context currently effective in WS
			R3mmh pt	SAP CCMS	MB	Maximum capacity of heap memory (abap/heap_area_total)
			R3mmh ppeak	SAP CCMS	%	Heap memory: Highest value after final query
			R3mmh pact	SAP CCMS	%	Amount of heap memory currently allocated
			R3mme mst	SAP CCMS		Maximum number of extended memory management slots
			R3mme mspeak	SAP CCMS	%	Highest extended memory management slot value after final query

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			R3mme msact	SAP CCMS	%	Capacity currently allocated to management slots
			R3mmw pnum	SAP CCMS		Number of WPs in PRIV mode
			R3mmdi arest	SAP CCMS		Number of WP restart dialogs (due to abap/heaplimit overrun) following startup
			R3mmn diarest	SAP CCMS		Number of WP restart batches (due to abap/heaplimit overrun) following startup
resource_d ata	R3_BUFF ERS	FJ1318	R3bufdir u	SAP CCMS	%	Buffer: Directory usage rate
			R3bufsp cu	SAP CCMS	%	Buffer: Buffer memory usage rate
			R3bufhit ratio	SAP CCMS	%	Buffer: Hit rate
			R3bufsw ap	SAP CCMS	/min	Number of swaps per minute caused by full buffer
resource_d ata	R3_TRFC QRFC	FJ1320	R3rfwc err	SAP CCMS		Number of tRFC errors caused by communication fault
			R3rfwe err	SAP CCMS		Number of tRFC errors caused by fault on target system
			R3rfwo err	SAP CCMS		Number of tRFC/qRFC errors caused by insufficient resources on target system
			R3rfctc all	SAP CCMS		Number of received tRFC/qRFC calls awaiting execution on local system
resource_d ata	R3_J2EEM EM	FJ1321	R3j2mal m	SAP CCMS	MB	Amount of memory allocated to J2EE Server Instances
			R3j2mav m	SAP CCMS	MB	Amount of memory available for J2EE Server Instances
			R3j2mus edm	SAP CCMS	MB	Amount of memory used by J2EE Server Instances
			R3j2mal mr	SAP CCMS	%	Usage rate of memory allocated to J2EE Server Instances
			R3j2mus edmr	SAP CCMS	%	Memory usage rate of J2EE Server Instances
resource_d ata	R3_J2EET XN	FJ1322	R3j2tact xn	SAP CCMS		Number of transactions between J2EE applications (Active)
			R3j2tsus txn	SAP CCMS		Number of transactions between J2EE applications (Suspended)
			R3j2trbt xn	SAP CCMS		Number of transactions between J2EE applications (Rolledback)
			R3j2tco mtxn	SAP CCMS		Number of transactions between J2EE applications (Committed)

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			R3j2ttou txn	SAP CCMS		Number of transactions between J2EE applications (Timeout)
resource_d ata	R3_J2EEP AREQP	FJ1323	R3j2prre q	SAP CCMS	requests	Number of J2EE application requests
			R3j2prre qps	SAP CCMS	requests/sec	Number of J2EE application requests (per second)
			R3j2prcc alls	SAP CCMS		J2EE application component issue count
			R3j2prar espt	SAP CCMS	msec	J2EE application response time
			R3j2prac put	SAP CCMS	msec	J2EE application CPU time
			R3j2pra odata	SAP CCMS		Volume of J2EE application traffics

#### 4.2.23 The ECO folder/No data

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_d ata_wide	ECO_PO WER	FJ1356	power	snmp	number	Electric power at moment
			powera vg	snmp	number	Average electric power
			power min	snmp	number	Lowest electric power
			power max	snmp	number	Highest electric power
			energy	snmp	number	Electric energy
			pwhost	snmp	string	IP address or host name
			pwreso urce	snmp	string	Resource name
resource_d ata_wide	ECO_TEM PERATUR E	FJ1357	temper ature	snmp	number	Temperature at moment
			temper atureav g	snmp	number	Average temperature
			temper aturemi n	snmp	number	Lowest temperature
			temper aturem ax	snmp	number	Highest temperature
			tphost	snmp	string	IP address or host name
			tpresou rce	snmp	string	Resource name



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			temperatureinfo	snmp	string	Supplemental information about temperature

## 4.2.24 The VMware folder/VMware reports

### VMware ESX/VMware ESXi

This is performance information for VMware ESX and VMware ESXi.

The data format is the same for https and ssh, but the collected items are different. Information with <ssh> in the "Description" column is only collected in ssh, and is not collected in https. Also, information with <https> in the "Description" column is only collected in https, and is not collected in ssh.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_uwide	VMW_GC PU	2101	vmgcmem	(*)	number	Number of members in the resource pool of the running world or in the virtual machine<ssh>
			vmgcsused	(*)	percent	Percentage of the physical CPU usage rate by each resource pool and virtual machine
			vmgcrun	(*)	percent	Percentage of scheduled CPU time of each resource pool and virtual machine
			vmgcsys	(*)	percent	Percentage of the time that CPU of each virtual machine was consumed in ESX/ESXi Vmkernel.
			vmgcwait	(*)	percent	Percentage of time consumed in each resource pool or virtual machine for state of block or busy standby
			vmgcready	(*)	percent	Percentage of the time of waiting for CPU allocation of each virtual machine
			vmgcidle	(*)	percent	Percentage of the time when each resource pool and virtual machine is in idle state.  In https, this is collected for VMware ESXi 5.0 and later.
			vmgcoverlap	(*)	percent	Percentage of the time consumed by another resource pool or virtual machine when resource pool or virtual machine is scheduled for each <ssh>
			vmgcostop	(*)	percent	Percentage of time consumed by resource pool or virtual machine at state of ready released from simultaneous scheduling <ssh>
			vmgcmalim	(*)	percent	Percentage of time when it does not operate because of violation of

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
						restriction setting for resource pool or virtual machine <ssh>
			vmgcs witches	(*)	number	Number of Switches of each resource pool or virtual machine <VMware ESX>
			vmgcm igr	(*)	number	Number of Migrates of each resource pool or virtual machine<Vssh>
			vmgcpr omigr	(*)	number	Number of Processor Migrations of each resource pool or virtual machine <ssh>
			vmgcw kupm	(*)	number	Number of Wakeup Migrate Idle of each resource pool or virtual machine <ssh>
			vmgcce llmigr	(*)	number	Number of Cell Migrations of each resource pool or virtual machine <. In ssh, this isn't collected in case of VMware ESX 4.1.
			vmgcq uexp	(*)	number	Number of Quantum Expires of each resource pool or virtual machine <ssh>
			vmgcw up	(*)	number	Number of Wakeups of each resource pool or virtual machine <ssh>
			vmgcal lmin	(*)	MHz	Reservation of resource allocation of each resource pool or virtual machine <ssh>
			vmgcal lmax	(*)	MHz	Limit of resource allocation of each resource pool or virtual machine The value of -1 means no limitation. <ssh>
			vmgcal lshrs	(*)	MHz	Shares of resource allocation of each resource pool or virtual machine. The following values will be displayed depending on setting. [ssh] low: -2 normal: -3 high: -4 custom: value specified [https] VMware's value for share size of virtual machine
			vmgcal lminlim	(*)	MHz	Reservation or limit of resource allocation of each resource pool or virtual machine

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
						The value of -1 means no limitation. <ssh>
			vmgcn umcpu	(*)	number	Number of CPUs<https>
			vmgcre svcpu	(*)	MHz	CPU performance <https> VMware ESXi 5.0 and later.
			vmgcs wapwai t	(*)	percent	Swap wait rate for each virtual machine  This is collected for VMware ESX/ ESXi 4.1 and later.
			vmgcus emhz	(*)	MHz	CPU usage of virtual machine (MHz) <https>
			esxnam e	(*)	name	ESX/ESXi server host name<https>
			vmnam e	(*)	name	Virtual machine name
			physres	(*)	name	Physical CPU information or virtual CPU information
			vmhost name	(*)	name	Host name for virtual machine  (It will be a blank column for this field because the data of this field is not collected.)
			vmgccp urespoo l	(*)	name	Resource pool name <https>
resource_d ata_uwide	VMW_CP U	2102	vmvcus ed	(*)	seconds	Physical CPU time used by resource pool and world of virtual machine
			vmvcru n	(*)	seconds	Scheduled time of resource pool and world of virtual machine <ssh>
			vmvcsy s	(*)	seconds	The time that CPU of each resource pool and world of virtual machine is consumed in ESX/ESXi Server VMkernel
			vmvcw ait	(*)	seconds	The time consumed in resource pool or world of virtual machine for state of block or busy standby
			vmvcre ady	(*)	seconds	CPU allocation waiting time of resource pool and world of virtual machine
			vmvcid le	(*)	seconds	CPU idle time of resource pool and world of virtual machine.  In https, this is collected for VMware ESXi 5.0 and later.
			vmvco verlap	(*)	seconds	The time consumed by another resource pool or virtual machine

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
						when resource pool and world of virtual machine is scheduled <ssh>
			vmvcco stop	(*)	seconds	The time consumed by resource pool and world of virtual machine at state of ready released from simultaneous scheduling <ssh>
			vmvcm axlim	(*)	seconds	The time when it does not operate because of violation of restriction setting for resource pool and world of virtual machine <ssh>
			vmvcs witches	(*)	number	Number of Switches of resource pool or world of virtual machine <ssh>
			vmvcm igr	(*)	number	Number of Migrates of resource pool or world of virtual machine <ssh>
			vmvcpr omigr	(*)	number	Number of Processor Migrations of resource pool, virtual machine, or world attribute <ssh>
			vmvcw upmigr	(*)	number	Number of Wakeup Migrate Idle of resource pool or world of virtual machine <ssh>
			vmvce lmigr	(*)	number	Number of Cell Migrations of resource pool or world of virtual machine.<ssh>  In ssh, this is not collected in case of VMware ESX 4.1.
			vmvcq uaexp	(*)	number	Number of Quantum Expires of resource pool or world of virtual machine <ssh>
			vmvcw up	(*)	number	Number of Wakeup Migrate Idles of resource pool or world of virtual machine <ssh>
			vmvcal lmin	(*)	MHz	Reservation of resource pool or world of virtual machine <ssh>
			vmvcal lmax	(*)	MHz	Limit of resource pool or world of virtual machine  The value of -1 means no limitation.  <ssh>
			vmvcsh rs	(*)	MHz	Shares of resource pool or world of virtual machine  The value of -2 means set "Low", the value of -3 means set "Normal", and the value of -4 means set "High".  <ssh>

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			vmvcm inlim	(*)	MHz	Reservation or limit of resource allocation of resource pool or world of virtual machine  The value of -1 means no limitation. <ssh>
			vmvpc pu	(*)	number	Physical or logical processor that executed the world when information is acquired <ssh>
			vmvcef min	(*)	number	Number of reservation in resource pool or world of virtual machine <ssh>  In ssh, this is not collected in case of VMware ESX 4.1.
			vmvcht q	(*)	number	HT composition (Yes : 1, NO : 0) of resource pool or world of virtual machine <ssh>
			vmvcti mers	(*)	number	Timer rate of resource pool or world of virtual machine <ssh>  In ssh, this is not collected in case of VMware ESX 4.1.
			vmcesx name- vcpu	(*)	name	Host name for ESX/ESXi server<https>
			vmnam e-vcpu	(*)	name	Virtual machine name
			physres -vcpu	(*)	name	Physical CPU information or virtual CPU information
			vmhost name- vcpu	(*)	name	Host name for virtual machine  (It will be a blank column for this field because the data of this field is not collected.)
resource_d ata_uuwide	VMW_ME M	2103	vmgm mem	(*)	number	Number of member of resource pool or virtual machine < ssh >
			vmgma llim	for https protocol (*)	Mbytes	Memory reservation of resource pool or virtual machine
				for ssh protocol (*)	Kbytes	
			vmgma llmax	for https protocol (*)	Mbytes	Memory limit of resource pool or virtual machine  The value of -1 means no limitation.
				for ssh protocol (*)	Kbytes	

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			vmgma llsh	for https protocol (* )	Mbytes	Share size of memory of each resource pool or virtual machine. The following values will be displayed depending on setting. [ssh] low: -2 normal: -3 high: -4 custom: value specified [https] VMware's value for share size of virtual machine
				for ssh protocol (* )	Kbytes	
			vmgmn minl	for https protocol (* )	Mbytes	Limit of memory reservation of each resource pool or virtual machine The value of -1 means no limitation. < ssh >
				for ssh protocol (* )	Kbytes	
			vmgmn umh	(* )	number	Current home node of resource pool or virtual machine This information is available only on NUMA system. '0' is displayed if there is not a home node on the virtual machine. < ssh > In ssh, this is not collected in case of VMware ESX 4.1.
			vmgmn umreb	(* )	number	Number of rebalance count This information is available only on NUMA system. '0' is displayed if there is not a home node on the virtual machine. < ssh >
			vmgmr em	(* )	Mbytes	Amount of current remote memory allocated for resource pool or virtual machine This information is available only on NUMA system. '0' is displayed if there is not a home node on the virtual machine. < ssh >
			vmgml oc	(* )	Mbytes	Amount of current local memory allocated for resource pool or virtual machine

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
						This information is available only on NUMA system. '0' is displayed if there is not a home node on the virtual machine. < ssh >
			vmgml ocp	(*)	percent	Percentage of allocated memory for resource pool or local virtual machine  This information is available only on NUMA system. '0' is displayed if there is not a home node on the virtual machine. < ssh >
			vmgmmems	(*)	Mbytes	Amount of physical memory allocated for resource pool or virtual machine
			vmgmtrgs	(*)	Mbytes	Amount of machine memory hoping to be allocated to resource pool or virtual machine by ESX Server VMkernel < ssh >
			vmgmtm	(*)	Mbytes	Estimate of working sets of resource pool or virtual machine
			vmgmacest	(*)	percent	Percentage of guest physical memory referring by guest  This is an instantaneous value. < ssh >
			vmgmacsl	(*)	percent	Percentage of guest physical memory referring by guest  This is a low-speed moving average. < ssh >
			vmgmacf	(*)	percent	Percentage of guest physical memory referring by guest  This is a high-speed moving average. < ssh >
			vmgmacnx	(*)	percent	Percentage of guest physical memory referring by guest  This is a rough estimate value. < ssh >
			vmgm memctl	(*)	number	Whether the memory balloon driver is installed (Yes : 1, No : 0) < ssh >
			vmgm mctlmb	(*)	Mbytes	Amount of guest physical memory retrieved by the balloon driver of resource pool or virtual machine

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			vmgmmtm	(*)	Mbytes	Appropriate amount of balloon memory of resource pool or virtual machine
			vmgmmxm	(*)	Mbytes	Maximum amount of guest physical memory retrieved by balloon driver of resource pool or virtual machine < ssh >
			vmgmswm	(*)	Mbytes	Swapped memory size of resource pool or virtual machine
			vmgmswtm	(*)	Mbytes	Swapping memory size of resource pool or virtual machine
			vmgmswr	(*)	Mbytes	Swapped in memory size of resource pool or virtual machine  In https, this is collected for VMware ESX/ESXi 4.0 and later.
			vmgmswwr	(*)	Mbytes	Swapping out memory size of resource pool or virtual machine  In https, collected for VMware ESX/ESXi 4.0 and later.
			vmgmcprm	(*)	Mbytes	Amount of data read from check point file of resource pool or virtual machine < ssh >
			vmgmcptm	(*)	Mbytes	Size of check point file of resource pool or virtual machine < ssh >
			vmgmzerom	(*)	Mbytes	Size of zero memory of resource pool or virtual machine
			vmgmshm	(*)	Mbytes	Shared memory size of resource pool or virtual machine < ssh >
			vmgmshs	(*)	Mbytes	Page size saved for shared memory of resource pool or virtual machine
			vmgmcowm	(*)	Mbytes	Physical hint page on resource pool or virtual machine < ssh >
			vmgmo uw	(*)	Mbytes	Memory overhead used for user world of resource pool or virtual machine < ssh >
			vmgmo hm	(*)	Mbytes	Memory overhead of resource pool or virtual machine
			vmgmo hmx	(*)	Mbytes	Maximum memory overhead of resource pool or virtual machine < ssh >
			vmgmminct	(*)	Mbytes	Minimum committing target of resource pool < ssh >
			vmgmc tm	(*)	Mbytes	Committing target of resource pool < ssh >
			vmgmc cm	(*)	Mbytes	Commit charge of resource pool < ssh >



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			vmgmpsh	(*)	pages	Commit page of resource pool <ssh>
			vmgmlr	(*)	number	Client response (Yes : 1, No : 0) <ssh> In ssh, this is not collected in case of VMware ESX 4.1.
			vmgmresvsize	(*)	Mbytes	Memory size reserved in virtual machine (guest) <https> This is collected for VMware ESXi 5.0 and later.
			vmmesxname	(*)	name	Host name for ESX/ESXi server
			vmmvmmname	(*)	name	Virtual machine name
			physresvmmem	(*)	name	Physical memory or virtual memory information
			vmmemhostname	(*)	name	Host name for virtual machine.> (It will be a blank column for this field because the data of this field is not collected.)
			vmgmrespool	(*)	name	resource pool name <https>
resource_data_wide	VMW_DISK	2104	vmddcommands	(*)	commands	Number of command issued of virtual machine or storage device
			vmddreads	(*)	reads	Number of read command issued of virtual machine or storage device
			vmddwrites	(*)	writes	Number of write command issued of virtual machine or storage device
			vmddmbread	(*)	Mbytes	Disk read size of virtual machine or storage device
			vmddmbwrt	(*)	Mbytes	Disk write size of virtual machine or storage device
			vmddavgcmd	(*)	millisec	Average device waiting time of virtual machine or storage device <ssh>
			vmddavgkrcmd	(*)	millisec	Average ESX Server VMkernel waiting time of virtual machine or storage device <ssh>
			vmddavgstcmd	(*)	millisec	Average virtual machine operating system waiting time of virtual machine or storage device <ssh>
			vmddavgquecmd	(*)	millisec	Average queue waiting time of virtual machine or storage device <ssh>

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			vmdaborts	(*)	aborts	Number of command aborted of virtual machine or storage device
			vmdresets	(*)	resets	Number of command reset of virtual machine or storage device
			vmdavgreadtime	(*)	millisec	Average read time of virtual machine or storage device This is collected for ESX/ESXi 4.1 and later.
			vmdavgwritetime	(*)	millisec	Average write time of virtual machine or storage device This is collected for ESX/ESXi 4.1 and later.
			vmesxname	(*)	name	Host name for ESX/ESXi server
			vmvname	(*)	name	Virtual machine name
			physresvmmid	(*)	name	Physical device or virtual device information
			vmvhostname	(*)	name	Host name for virtual machine. (It will be a blank column for this field because the data of this field is not collected.)
			vmddiskresourcepool	(*)	name	resource pool name <https>
resource_data_wide	VMW_NEST	2105	vmnlinkup	(*)	name	Link operating status of the physical or virtual network device port (Yes : 1, No : 0) <VMware ESX>
			vmnlinksp	(*)	Mbps	Link speed of physical network device port (Will be 0 in ssh, blank in https in case of virtual network port)
			vmnfull	(*)	number	Corresponding link is operating at full duplex of the virtual network device port (Yes : 1, No : 0) <ssh>
			vmnpacktr	(*)	packets	Number of transmission packets of the virtual network device port
			vmnmpvtr	(*)	Mbits	Megabit transmitted of the virtual network device port
			vmnpacktrcv	(*)	packets	Number of receiving packets of the virtual network device port
			vmnmpbrcv	(*)	Mbits	Megabit received of the virtual network device port
			vmnportpacktdr	(*)	percent	Drop ratio of transmission packets for physical or virtual network device port.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
						.In https, this is collected for VMware ESX/ESXi 4.1 and later Virtual network device port information is not collected in https for VMware ESX/ESXi 4.1.
			vmnpre cvpckd r	(*)	percent	Drop ratio of receiving packets for physical or virtual network device port.In https, this is collected for VMware ESX/ESXi 4.1 and later Virtual network device port information is not collected in https for VMware ESX/ESXi 4.1.
			vmnpac tpost	(*)	actions	Number of actions of the virtual network device port <ssh>
			vmnpus age	(*)	Mbps	Average transfer speed for virtual or physical network port
			vmnesx name	(*)	name	Host name for ESX/ESXi server
			vmnvm name	(*)	name	Virtual machine name
			physres vmmne t	(*)	name	Virtual network device port information
			vmneth ostnam e	(*)	name	Host name for virtual machine  (It will be a blank column for this field because the data of this field is not collected.)
			vmnnet respool	(*)	name	resource pool name <https>
resource_d ata	VMW_PC PU	2110	vmpcp ul	(*)	percent	Average usage rate of physical CPU
			vmpcp uu	(*)	percent	Percentage of CPU user time reported by service console <ssh>
			vmpcp us	(*)	percent	Percentage of CPU system time reported by service console <ssh>
			vmpcp uit	(*)	percent	Percentage of CPU idle reported by service console <ssh>
			vmpcp uio	(*)	percent	Percentage of CPU standby time reported by service console <ssh>
			vmpcp ucs	(*)	switches	Number of context switch reporded by service console <ssh>
resource_d ata_vwide	VMW_PM EM	2111	vmpme mo	(*)	number	Memory over commit <ssh>
			vmpme mm	(*)	Mbytes	Amount of physical memory
			vmpme mk	(*)	Mbytes	Amount of physical memory used by Vmkernel

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			vmpmemnk	(*)	Mbytes	Amount of physical memory used by other than service console or VMkernel <ssh>
			vmpmemfree	(*)	Mbytes	Amount of free memory
			vmpmank	(*)	Mbytes	Amount of physical memory managed by VMkernel <ssh>
			vmpmresk	(*)	Mbytes	Amount of physical memory reserved by VMkernel <ssh>
			vmpmccons	(*)	Mbytes	Amount of physical memory used by service console <ssh>
			vmpmcconssw	(*)	Mbytes	Amount of total swaps reported by service console <ssh>
			vmpmcconswf	(*)	Mbytes	Amount of swap free reported by service console <ssh>
			vmpmpssh	(*)	Mbytes	Amount of shared memory
			vmpmpscm	(*)	Mbytes	Amount of swap
			vmpmctlcur	(*)	Mbytes	Total amount of physical memory freed by using vmmemctl module
			vmpmctltar	(*)	Mbytes	Total amount of physical memory freed by using vmmemctl module <ssh>
			vmpmswrcon	(*)	Mbytes	Memory size swapped in reported by service console <ssh>
			vmpmsrdcon	(*)	Mbytes	Memory size swapping out reported by service console <ssh>
			vmpmswrdr	(*)	Mbytes	Memory size swapped in In https, this is collected for ESX/ESXi 4.1 and later.
			vmpmswrdwr	(*)	Mbytes	Memory size swapping out In https, this is collected for ESX/ESXi 4.1 and later.
			vmpmmemcompressize	(*)	Mbytes	Compressed memory size for each host This is collected for VMware ESX/ESXi 4.1 and later.
			vmpmresvmem	(*)	Mbytes	Amount of reserved memory(MB) <https>
			vmpmusedmem	(*)	Mbytes	Memory usage (MB) <https>

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_wide	VMW_PDISK	2112	vmpdc ommands	(*)	commands	Number of command issued per physical disk
			vmpdreads	(*)	reads	Number of disk read per physical disk
			vmpdwrites	(*)	writes	Number of disk write per physical disk
			vmpdm bread	(*)	Mbytes	Size of disk read per physical disk
			vmpdm bwr	(*)	Mbytes	Size of disk write per physical disk
			vmpdavgcmd	(*)	millisec	Average device latency per physical disk
			vmpdavgkrncmd	(*)	millisec	Average ESX/ESXi Server VMkernel latency per physical disk
			vmpdavgstemd	(*)	millisec	Average virtual machine operating system latency per physical disk
			vmpdavgquecmd	(*)	millisec	Average queue latency per physical disk
			vmpdabort	(*)	aborts	Number of command aborted per physical disk
vmpdresets	(*)	resets	Number of command reset per physical disk			
resource_data_wide	VMW_MEM2	2151	vmmemcompressize	(*)	Mbytes	Compressed memory size for each virtual machine (guest)  This is collected for ESX/ESXi 4.1 and later.
			vmmemextendedcompressize	(*)	Mbytes	Extended memory size for each virtual machine (guest)  This is collected for VMware ESX/ESXi 4.1 and later.
			vmmesxname	(*)	name	Host name for VMware ESX/VMware ESXi server
			vmmvmname	(*)	name	Virtual machine name
			physresvmmem	(*)	name	Information about physical or virtual memory
			vmmemhostname	(*)	name	Host name for virtual machine  (It will be a blank column for this field because the data of this field is not collected.)

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			Vmgm memres pool	(*)	name	resource pool name <https>
resource_data_wide	VMW_PC PU2	2152	vmphosutil	(*)	percent	CPU usage rate for each physical processor (In case Hyper-Threading is OFF) Collected for ESX/ESXi 4.1 or later.
			vmphostcoreutil	(*)	percent	CPU usage rate for each physical processor (In case Hyper-Threading is ON) This is collected for VMware ESX/ESXi 4.1 and later.
			vmreserved	(*)	MHz	Amount of CPU reserved (MHz) <https>
			vmcpuusage	(*)	MHz	CPU usage (MHz) <https>
			vmcpucorecount	(*)	number	Number of CPU cores <https>
			vmcpuspeed	(*)	MHz	CPU speed per core <https>
			vmhyperthreading	(*)	name	State of Hyperthreading (ON/OFF) <https>
resource_data_wide	VMW_PD ISK2	2153	vmdeviceio_read	(*)	millisec	Average device read time for each physical disk In ssh, this is collected for VMware ESX 4.1.
			vmdeviceio_write	(*)	millisec	Average device write time for each physical disk or each physical disk In ssh, this is collected for VMware ESX 4.1.
			vmkernelio_read	(*)	millisec	Average ESX/ESXi Server VMkernel read time for each physical disk or each physical disk In ssh, this is collected for VMware ESX 4.1.
			vmkernelio_write	(*)	millisec	Average ESX/ESXi Server VMkernel write time for each physical disk or each physical disk In ssh, this is collected for VMware ESX 4.1.

(\*)

For https: SOAP API

For ssh : esxtop

## VMware vCenter

This is performance information for VMware vCenter. Some fields are not collected depending on the setting of VMware vCenter.

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	VMW_CLUSTER	2170	failover	SOAP API	number	Number of permissible VMware HA failures
			vmclnumeffectivehosts	SOAP API	number (int)	Total number of effective hosts
			vmclnumhosts	SOAP API	number (int)	Total number of hosts
			vmclcname	SOAP API	string	Name of data center to which this cluster belongs
resource_data_wide	VMW_CLUSTER_CPU	2171	vmcltotalmhz	SOAP API	MHz	Total CPU resources of all hosts in the cluster. Number of cores x MHz
			vmclusagemhz	SOAP API	MHz	Total usage of CPUs actively used by all virtual computers in the cluster (MHz)
			vmcleffactivecpu	SOAP API	MHz	Total CPUs usable by all hosts in the cluster (MHz)
			vmclusactivepercent	SOAP API	percent	Total CPUs actively used by all virtual computers in the cluster (%)
			vmcltotalcpu	SOAP API	MHz (int)	Total CPU resources of all hosts (MHz)
			vmclnumcpucores	SOAP API	number (short)	Number of physical CPU cores. Physical CPU cores are the processors that the CPU package contains.
			vmclnumcputhreads	SOAP API	number (short)	Total number of CPU threads
			vmclcname_cpu	SOAP API	string	Name of data center to which this cluster belongs
resource_data_wide	VMW_CLUSTER_MEM	2172	vmclconsumedmem	SOAP API	MB	Memory usage of hosts with power on in the cluster (except usage of vSphere service)
			vmcltotalmb	SOAP API	MB	Total amount of memory usable by all hosts in the cluster
			vmclloverheadmem	SOAP API	MB	Amount of memory overhead

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			vmcleff ectivem em	SOAP API	MB	Total amount of memory usable by all hosts in the cluster (MB)
			vmclus ememp cent	SOAP API	percent	Memory usage rate (%)
			vmcltot almem ory	SOAP API	MB (long)	Total memory resource of all hosts (bytes)
			vmcldc name_ mem	SOAP API	string	Name of datacenter to which this cluster belongs.
resource_data_wide	VMW_R POOLCPU	2173	vmrsus agemhz	SOAP API	MHz	CPU usage for resource pool
			vmrsex p_reser vation_ cpu	SOAP API	boolean	CPU reservation setting for resource pool. True: Exists; False: None
			vmrsl imit_cp u	SOAP API	MHz (long)	CPU resource allocation for resource pool (limit) -1 if no limitation
			vmrsres ervatio n_cpu	SOAP API	MHz (long)	CPU resource allocation for resource pool(reserve)
			vmrssh areslev el_cpu	SOAP API	(int)	CPU resource allocation level for resource pool(share)
			vmrssh ares_cp u	SOAP API	(int)	CPU share allocated to resource pool Only effective if the level is set to custom.
			vmrsm axusag e_cpu	SOAP API	MHz (long)	Upper limit of CPU usable by resource pool
			vmrsres ervatio nused_ cpu	SOAP API	MHz (long)	CPU usage of reserved area by resource pool
			vmrsres ervatio nusedv m_cpu	SOAP API	MHz (long)	CPU usage of reserved area by virtual machines in resource pool
			vmrsun reserve dpool_ cpu	SOAP API	MHz (long)	Amount of CPU in reserved area that can be allocated for resource pool
			vmrsun reserve	SOAP API	MHz (long)	Amount of CPU in reserved area that can be allocated to virtual machines in resource pool



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			dvm_cpu			
			vmrsdcname_cpu	SOAP API	string	Name of datacenter to which this resource pool belongs.
resource_data_uuwide	VMW_RPOOLMEM	2174	vmrsactive mem	SOAP API	MB	Memory usage of resource pool This is not collected in case of VMware vCenter 5.0 and later.
			vmrsconsumed mem	SOAP API	MB	Memory usage of hosts with power on in the resource pool (except usage of vSphere service)
			vmrsgranted mem	SOAP API	MB	Memory usage of hosts with power on in the resource pool (include usage of vSphere service) This is not collected in case of VMware vCenter 5.0 and later.
			vmrsvmmemctl	SOAP API	MB	Amount of memory allocated using vmmemctl (VM memory control)
			vmrsoverhead mem	SOAP API	MB	Amount of overhead memory
			vmrsmemcompress	SOAP API	MB	Amount of compressed memory This is not collected in case of VMware vCenter 5.0 and later.
			vmrsmemcompress rate	SOAP API	MB/s	Memory compression rate This is not collected in case of VMware vCenter 5.0 and later.
			vmrsmemdecompress rate	SOAP API	MB/s	Memory decompression rate This is not collected in case of VMware vCenter 5.0 and later.
			vmrsmemshared	SOAP API	MB	Amount of memory shared by VMs This is not collected in case of VMware vCenter 5.0 and later.
			vmrsmemswapped	SOAP API	MB	Amount of swapped memory This is not collected in case of VMware vCenter 5.0 and later.
			vmrsexp_reservation_mem	SOAP API	int	Set state of memory reservation of resource pool true: set/false: not set
			vmrslimit-mem	SOAP API	MB (long)	Memory resource allocation for resource pool (limit) -1 if no limitation

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			vmrsreservation_mem	SOAP API	MB (long)	Memory resource allocation for resource pool (reserve)
			vmrshareslevel_mem	SOAP API	(int)	Memory resource allocation level for resource pool (share)
			vmrshares_mem	SOAP API	(int)	Amount of memory share allocated to resource pool
			vmrsmmaxusage_mem	SOAP API	MB (long)	Upper limit of usable memory in resource pool
			vmrsreservationused_mem	SOAP API	MB (long)	Memory usage of reserved area in resource pool
			vmrsreservationusedvm_mem	SOAP API	MB (long)	Memory usage of reserved area for virtual machines in resource pool
			vmrsunreservepool_mem	SOAP API	MB (long)	Amount of memory of reserved area that is capable of being allcated in resource pool
			vmrsunreservevm_mem	SOAP API	MB (long)	Amount of memory of reserved area that is capable of being allcated to virtual machines in resource pool
			vmrsrcname_mem	SOAP API	string	Name of datacenter to which this resource pool belongs.
resource_data_vwide	VMW_VSTORAGE	2175	vmvsprovisioned	SOAP API	GB	Storage provisioning space (potentially used space)
			vmvsunshared	SOAP API	GB	Unshared storage space
			vmvsused	SOAP API	GB	Actually used space
			vmvsvmdiskused	SOAP API	GB	Usage of virtual disk area
			vmvssnapused	SOAP API	GB	Usage of snapshot area
			vmvsswapused	SOAP API	GB	Usage of swap file area

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			vmvsot herused	SOAP API	GB	Usage of other VM file areas
			vmvsav grdtime	SOAP API	millisec	Average read wait time for each virtual machine disk
			vmvsav gwttime	SOAP API	millisec	Average write wait time for each virtual machine disk
			vmvsre adnum	SOAP API	number	Average number of read commands issued per second to data store during collection interval
			vmvsw ritenum	SOAP API	number	Average number of write commands issued per second to data store during collection interval
			vmvsm brd	SOAP API	MB	Read size of datastore
			vmvsm bwt	SOAP API	MB	Write size of datastore
			vmvsdc name	SOAP API	string	Name of datacenter to which this datastore belongs.
			vmvses xname	SOAP API	name	Host name of ESX/ESXi server
			vmvsv mname	SOAP API	name	Virtual machine name
resource_data_wide	VMW_V STORAGE2	2177	vmvsav grdtime	SOAP API	millisec	Average read wait time for each virtual machine disk
			vmvsav gwttime	SOAP API	millisec	Average write wait time for each virtual machine disk
			vmvsre adnum	SOAP API	number	Average number of read commands issued per second to data store during collection interval
			vmvsw ritenum	SOAP API	number	Average number of write commands issued per second to data store during collection interval
			vmvsm brd	SOAP API	MB	Read size of datastore
			vmvsm bwt	SOAP API	MB	Write size of datastore
			vmvsdc name2	SOAP API	string	Name of datacenter to which this datastore belongs.
			vmvses xname2	SOAP API	name	Host name of ESX/ESXi server
			vmvsv mname 2	SOAP API	name	Virtual machine name

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_uwide	VMW_D ATASTORE	2176	vmdspr ovision ed	SOAP API	GB	Storage provisioning space (potentially used space)
			vmdsus ed	SOAP API	GB	Actually used space
			vmdsv mdisku sed	SOAP API	GB	Usage of virtual disk area
			vmdssn apused	SOAP API	GB	Usage of snapshot area
			vmdss wapuse d	SOAP API	GB	Usage of swap file area
			vmdsot herused	SOAP API	GB	Usage of other VM file areas
			vmdsre adnum	SOAP API	number	Average number of read commands issued per second to data store during collection interval
			vmdsw ritenum	SOAP API	number	Average number of write commands issued per second to data store during collection interval
			vmdsre ad	SOAP API	MB	Read size of datastore  This is not collected in case of VMware vCenter 5.0 and later
			vmdsw rite	SOAP API	MB	Write size of datastore  This is not collected in case of VMware vCenter 5.0 and later
			vmdsth ptcont ent	SOAP API	millisec	Average time of I/O activity to the data store or average time that all ESX/ESXi hosts accessed LUN  This is not collected in case of VMware vCenter 5.0 and later
			vmdsth ptusage	SOAP API	MB	Current band usage for the data store or LUN  This is not collected in case of VMware vCenter 5.0 and later
			vmdssi zenorm latency	SOAP API	microsecond	Size normalization I/O wait time of storage I/O control  This is not collected in case of VMware vCenter 5.0 and later
			vmdsda tastorei ops	SOAP API	number	Total IOPS of storage I/O control  This is not collected in case of VMware vCenter 5.0 and later
			vmdsac cessible	SOAP API	int	Connection status of the data store  True: Can connect; False: Cannot connect

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			vmdsca capacity	SOAP API	GB	Disk space of datastore
			vmdsfr eespace	SOAP API	GB	Free disk space of datastore
			vmdsun commit ted	SOAP API	GB	Total additional storage capacity potentially used by all virtual computers in the data store
			vmdsho stnumb er	SOAP API	number	Number of hosts connected to the data store
			vmdsv mnumb er	SOAP API	number	Number of VMs stored in the data store
			vmdsdc name	SOAP API	string	Name of datacenter to which this datastore belongs.
			vmdsty pe	SOAP API	string	Type of file system volumes of the data store
			physres vmme m	SOAP API	name	Location of the data store

## 4.2.25 The Hyper-V folder/Hyper-V reports



.....  
 HV\_LNET is performance information for Legacy network. It is collected when Legacy network is used.  
 .....

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_d ata_wide	HV_CPU	1210	pgrt	reg typeperf	percent	Usage rate of total processor time consumed by guest OS
			phrt	reg typeperf	percent	Usage rate of total processor time consumed by Hypervisor code
			ptrt	reg typeperf	percent	Usage rate of total processor time consumed for executing parent OS and all guest OS
			pcss	reg typeperf	count	Number of virtual processor context swith on processor
			phis	reg typeperf	count	Number of hardware interrupt except Hypervisor on processor
			pipiss	reg typeperf	count	Number of interrupt between Hypervisor processors sent by processor

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			pipis	reg typeperf	count	Number of interrupt between Hypervisor processors send to processor
			pmtc	reg typeperf	number	Hardware cost because of transition to hypervisor
			psis	reg typeperf	count	Number of interrupt of Hypervisor scheduler on processor
			ptis	reg typeperf	count	Number of interrupt of Hypervisor timer on processor
			ptint	reg typeperf	count	Number of interrupt of hardware and hypervisor per second
resource_data	HV_RVCP U	1211	pgrvtim	reg typeperf	percent	Usage rate of virtual processor used by parent OS consumed for executing parent OS and all guest OS
			phrvtim	reg typeperf	percent	Usage rate of virtual processor used by parent OS consumed by guest OS
			ptrvtim	reg typeperf	percent	Usage rate of virtual processor used by parent OS consumed by Hypervisor code
resource_data	HV_VCPU	1212	pgrtim	reg typeperf	percent	Usage rate of virtual processor allocated for virtual machine consumed for executing parent OS and all guest OS
			phrtim	reg typeperf	percent	Usage rate of virtual processor allocated for virtual machine consumed by guest OS
			ptrtim	reg typeperf	percent	Usage rate of virtual processor allocated for virtual machine consumed by Hypervisor code
resource_data	HV_LNET	1213	pbd	reg typeperf	bytes	Number of bytes discarded at network adapter
			pbrs	reg typeperf	bytes	Number of bytes receiving at network adapter
			pbss	reg typeperf	bytes	Number of bytes sending at network adapter
			pdf	reg typeperf	frames	Number of frames discarded at network adapter
			pfrs	reg typeperf	frames	Number of frames receiving at network adapter
			pfss	reg typeperf	frames	Number of frames sending at network adapter
resource_data	HV_IDE	1214	prbside	reg	bytes	Number of bytes read by IDE controller of virtual machine

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
				typeperf		
			prsside	reg typeperf	sectors	Number of sectors read by IDE controller of virtual machine
			pwbside	reg typeperf	bytes	Number of bytes written by IDE controller of virtual machine
			pwsside	reg typeperf	sectors	Number of sectors written by IDE controller of virtual machine
resource_data	HV_VNET	1215	pbrsvn	reg typeperf	bytes	Number of bytes received at network adaptor
			pbssvn	reg typeperf	bytes	Number of bytes sent from network adaptor
			pbsvn	reg typeperf	bytes	Total number of bytes when network adaptor was scanned
			pprsvn	reg typeperf	packets	Number of packets received at network adaptor
			ppssvn	reg typeperf	packets	Number of packets sent from network adaptor
			ppsvn	reg typeperf	packets	Number of packets received at network adaptor
resource_data	HV_VDISK	1216	pecvd	reg typeperf	count	Total number of error that occurs on network device
			pcvd	reg typeperf	count	Total number of flash operation on network device
			prbsvd	reg typeperf	bytes	Total number of read bytes on virtual device
			prcvd	reg typeperf	count	Total number of read operation on virtual device
			pwbsvd	reg typeperf	bytes	Total number of written bytes on virtual device
			pwcvd	reg typeperf	count	Total number of written operation on virtual device
resource_data_wide	HV_VSWITCH	1217	pbrssw	reg typeperf	bytes	Number of bytes received at virtual network (switch)
			pbssw	reg typeperf	bytes	Number of bytes sent from virtual network (switch)
			pbssw	reg typeperf	bytes	Number of bytes sent and received in virtual network (switch)
			ppfsw	reg	packets	Number of packets overflowed in virtual network (switch)

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
				typeperf		
			ppfssw	reg typeperf	packets	Number of packets overflowed in virtual network (switch) (cumulative value of momentary value)
			pprsw	reg typeperf	packets	Number of packets received at virtual network (switch)
			ppssw	reg typeperf	packets	Number of packets sent from virtual network (switch)
			ppssw	reg typeperf	packets	Number of packets sent and received in virtual network (switch)
resource_data	HV_VSPO RT	1218	pbrsvs	reg typeperf	bytes	Number of bytes received at each port of virtual network (switch)
			pbssvs	reg typeperf	bytes	Number of bytes sent from each port of virtual network (switch)
			pbsvs	reg typeperf	bytes	Number of bytes sent and received in each port of virtual network (switch)
			pprsvs	reg typeperf	packets	Number of packets received at each port of virtual network (switch)
			ppssvs	reg typeperf	packets	Number of packets sent from each port of virtual network (switch)
			ppsvs	reg typeperf	packets	Number of packets sent and received in each port of virtual network (switch)
resource_data	HV_DMEM_BALANCER	1250	padmb	reg typeperf	Mbytes	Accumulated memory capacity added to virtual machine <Windows Server 2008 R2 SP1 or later>
			pavmb	reg typeperf	Mbytes	Memory capacity remaining on node <Windows Server 2008 R2 SP1 or later>
			papdb	reg typeperf	percent	Average load on balancer node <Windows Server 2008 R2 SP1 or later>
			pmaodb	reg typeperf	count	Total number of add operations <Windows Server 2008 R2 SP1 or later>
			pmrodb	reg typeperf	count	Total number of delete operations <Windows Server 2008 R2 SP1 or later>
			prmdb	reg typeperf	Mbytes	Accumulated memory capacity deleted from virtual machine <Windows Server 2008 R2 SP1 or later>



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_wide	HV_DMEM_VM	1251	padmvm	registry	Mbytes	Accumulated memory capacity added to virtual machine <Windows Server 2008 R2 SP1 or later>
			papdmvm	registry	percent	Average load of virtual machine <Windows Server 2008 R2 SP1 or later>
			pcpdmvm	registry	percent	Current load of virtual machine <Windows Server 2008 R2 SP1 or later>
			pgvpmvm	registry	Mbytes	Memory capacity displayed by virtual machine <Windows Server 2008 R2 SP1 or later>
			pmaxpvm	registry	percent	Maximum load band of virtual machine <Windows Server 2008 R2 SP1 or later>
			pmadovm	registry	count	Total number of add operations for virtual machine <Windows Server 2008 R2 SP1 or later>
			pmrodvm	registry	count	Total number of delete operations for virtual machine <Windows Server 2008 R2 SP1 or later>
			pminpvm	registry	percent	Minimum load band of virtual machine <Windows Server 2008 R2 SP1 or later>
			ppmdmvm	registry	Mbytes	Current memory capacity of virtual machine <Windows Server 2008 R2 SP1 or later>
			prmdmvm	registry	Mbytes	Accumulated memory capacity deleted from virtual machine <Windows Server 2008 R2 SP1 or later>

#### 4.2.26 The KVM folder/KVM reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	KVM_CPU	1260	kvmcpu_time	virt-top	nseconds	CPU time used
			kvmcpu_percent	virt-top	percent	CPU usage rate (Total CPU usage rate of virtual CPUs set in domain)
			kvmcpu_us	virt-top	number	Number of virtual CPU of domain
			kvmcpu_umhz	virt-top	MHz	CPU performance of domain
			kvmcpu_uhostname	virt-top	name	Host name for virtual machine

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			kvmcpudomainname	virt-top	name	Domain name
resource_data	KVM_MEMORY	1261	kvmmemoryused	virt-top	MBytes	Memory size being allocated to domain
			kvmmemorymax	virt-top	MBytes	Maximum memory size that can be allocated to domain
			kvmmemorypercent	virt-top	percent	Occupation rate of physical memory being allocated to domain
			kvmmemoryhostname	virt-top	name	Host name for virtual machine
			kvmmemorydomainname	virt-top	name	Domain name
resource_data	KVM_DISK	1262	kvmdiskblockreadby	virt-top	bytes	Amount of reads of virtual block device
			kvmdiskblockwriteby	virt-top	bytes	Amount of writes to virtual block device
			kvmdiskhostname	virt-top	name	Host name for virtual machine
			kvmdiskdomainname	virt-top	name	Domain name
resource_data	KVM_NETWORK	1263	kvmnetworkrxby	virt-top	bytes	Amount of data received by the virtual network interface
			kvmnetworktxby	virt-top	bytes	Amount of data sent by the virtual network interface
			kvmnetworkhostname	virt-top	name	Host name for virtual machine
			kvmnetworkdomainname	virt-top	name	Domain name
resource_data	KVM_POOL_STORAGE	1265	kvmpoolstoragecapacity	virt-top	Gbytes	Storage pool capacity
			kvmpoolstorageallocation	virt-top	Gbytes	Allocated amount of storage pool
			kvmpoolstorageusable	virt-top	Gbytes	Usable amount of storage pool

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			geavailable			
			kvmpoolstoragepercent	virt-top	percent	Storage pool usage rate
			kvmpoolstoragehostname	virt-top	name	Host name for virtual machine
			kvmpoolstoragepoolname	virt-top	name	Domain name

#### 4.2.27 The Xen folder/Xen reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	XEN_CPU	2106	xencused	xentop	seconds	CPU time used
			xenpcused	xentop	percent	CPU usage rate (Total of CPU usage rate of virtual CPU assigned as domain)
			xenpcun	xentop	number	Number of virtual CPU of domain
			xendname-cpu	xentop	name	Domain name
			dhostname-cpu	xentop	name	Host name for virtual machine (It will be a blank column for this field because the data of this field is not collected.)
			xensc	xentop	name	Status of domain
resource_data	XEN_MEMORY	2107	xenavm	xentop	MBytes	Memory size allocated to domain
			xenavmp	xentop	percent	Share of physical memory allocated to domain
			xenmax	xentop	MBytes	Maximum size of memory that can be allocated to domain
			xenmaxp	xentop	percent	Share of the maximum memory size that can be allocated to domain out of physical memory size
			xendname-mem	xentop	name	Domain name
			dhostname-mem	xentop	name	Host name for virtual machine (It will be a blank column for this field because the data of this field is not collected.)

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			xensm	xentop	name	Status of domain
resource_data	XEN_DISK	2108	vbdo	xentop	number	Number of request except read/write to virtual block device
			vbdrd	xentop	number	Number of read of virtual block device
			vbdwr	xentop	number	Number of write to virtual block device
			vbds	xentop	number	Number of virtual block device in domain
			xendname-disk	xentop	name	Domain name
			dhostname-disk	xentop	name	Host name for virtual machine (It will be a blank column for this field because the data of this field is not collected.)
			xensd	xentop	name	Status of domain
resource_data	XEN_NET	2109	xenkbt	xentop	KBytes	Amount of transmission of data of virtual network interface
			xenkbr	xentop	KBytes	Amount of reception of data of virtual network interface
			xenn	xentop	number	Number of network interface
			xendname-net	xentop	name	Domain name (It will be a blank column for this field because the data of this field is not collected.)
			dhostname-net	xentop	name	Host name for virtual machine
			xenvn	xentop	name	Status of domain

#### 4.2.28 The SolarisZone folder/Solaris Zone reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	ZONE_CPU	2160	zonecpuused	zonestat	second	Solaris zone CPU time <Solaris 11>
			zonecpu	zonestat	percent	Solaris zone % CPU used <Solaris 11>
			zonecpu	zonestat	second	Upper limit of Solaris zone CPUs <Solaris 11> (Displayed if upper limit has been set)
			zonecpu	zonestat	percent	% used of upper limit of Solaris zone CPUs <Solaris 11> (Displayed if upper limit has been set)

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			zonecpu ushrs	zonestat	number	Number of Solaris zone CPU shares <Solaris 11> (Displayed if sharing has been set)
			zonecpu ushrpct	zonestat	percent	Percentage of total Solaris zone CPU shares <Solaris 11> (Displayed if sharing has been set)
			zonecpu ushrupct	zonestat	percent	Percentage of total Solaris zone CPU shares being used <Solaris 11> (Displayed if sharing has been set)
			zonecpu ugzhostname	zonestat	name	Host name for global zone <Solaris 11>
			zonecpu uzonename	zonestat	name	Zone name <Solaris 11>
resource_data_wide	ZONE_MEM	2161	zonepm emused	zonestat	Kbytes	Solaris zone physical memory used <Solaris 11>
			zonepm empct	zonestat	percent	Solaris zone % physical memory used <Solaris 11>
			zonepm emcap	zonestat	Kbytes	Upper limit of Solaris zone physical memory <Solaris 11> (Displayed if upper limit has been set)
			zonepm emcapct	zonestat	percent	% used of upper limit of Solaris zone physical memory <Solaris 11> (Displayed if upper limit has been set)
			zonevm emused	zonestat	Kbytes	Solaris zone virtual memory used <Solaris 11>
			zonevm empct	zonestat	percent	Solaris zone % virtual memory used <Solaris 11>
			zonevm emcap	zonestat	Kbytes	Upper limit of Solaris zone virtual memory <Solaris 11> (Displayed if upper limit has been set)
			zonevm emcapct	zonestat	percent	% used of upper limit of Solaris zone virtual memory <Solaris 11> (Displayed if upper limit has been set)
			zonelm emused	zonestat	Kbytes	Solaris zone locked memory used <Solaris 11>
			zonelm empct	zonestat	percent	Solaris zone % locked memory used <Solaris 11>
			zonelm emcap	zonestat	Kbytes	Upper limit of Solaris zone locked memory <Solaris 11> (Displayed if upper limit has been set)
			zonelm emcapct	zonestat	percent	% used of upper limit of Solaris zone locked memory <Solaris 11> (Displayed if upper limit has been set)
			zoneme mgzhostname	zonestat	name	Host name for global zone <Solaris 11>

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			zonemzone name	zonestat	name	Zone name <Solaris 11>
resource_data	ZONE_PROCESS	2162	zoneps used	zonestat	number	Solaris zone processes running <Solaris 11>
			zoneps pct	zonestat	percent	% used of Solaris zone processes running <Solaris 11>
			zoneps cap	zonestat	number	Upper limit of Solaris zone processes running <Solaris 11> (Displayed if upper limit has been set)
			zoneps cappct	zonestat	percent	% used of upper limit of Solaris zone processes running <Solaris 11> (Displayed if upper limit has been set)
			zoneps gzhostname	zonestat	name	Host name for global zone <Solaris 11>
			zoneps zonename	zonestat	name	Zone name <Solaris 11>

#### 4.2.29 The UserData folder/No data

Twenty types of user data can be defined.

Record IDs are UDATA\_1 to UDATA\_20.

In the table below, Record ID is expressed as [UDATA\_n] (where n is from 1 to 20).

If the Record ID is UDATA\_1 to 3, UDATA\_6 to 8, UDATA\_11 to 13, or UDATA\_16 to 18:

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data	UDATA_n	(Note)	udndata1	sqcPDBcload	number	Data specified for col_data_num1 in sqcPDBcload data conversion definition file
			udndata2	sqcPDBcload	number	Data specified for col_data_num2 in sqcPDBcload data conversion definition file
			udndata3	sqcPDBcload	number	Data specified for col_data_num3 in sqcPDBcload data conversion definition file
			udndata4	sqcPDBcload	number	Data specified for col_data_num4 in sqcPDBcload data conversion definition file
			udndata5	sqcPDBcload	number	Data specified for col_data_num5 in sqcPDBcload data conversion definition file
			udndata6	sqcPDBcload	number	Data specified for col_data_num6 in sqcPDBcload data conversion definition file
			udndata7	sqcPDBcload	number	Data specified for col_data_num7 in sqcPDBcload data conversion definition file
			udntxt1	sqcPDBcload	text	Data specified for col_data_txt1 in sqcPDBcload data conversion definition file

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			udntxt2	sqcPDBload	text	Data specified for col_data_txt2 in sqcPDBload data conversion definition file
			udntxt3	sqcPDBload	text	Data specified for col_data_txt3 in sqcPDBload data conversion definition file
			udntxt4	sqcPDBload	text	Data specified for col_data_txt4 in sqcPDBload data conversion definition file
			udntxt5	sqcPDBload	text	Data specified for col_data_txt5 in sqcPDBload data conversion definition file

If the Record ID is UDATA\_4 to 5, UDATA\_9 to 10, UDATA\_14 to 15, or UDATA\_19 to 20:

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_wide	UDATA_n	(Note )	udndata1	sqcPDBload	number	Data specified for col_data_num1 in sqcPDBload data conversion definition file
			udndata2	sqcPDBload	number	Data specified for col_data_num2 in sqcPDBload data conversion definition file
			udndata3	sqcPDBload	number	Data specified for col_data_num3 in sqcPDBload data conversion definition file
			udndata4	sqcPDBload	number	Data specified for col_data_num4 in sqcPDBload data conversion definition file
			udndata5	sqcPDBload	number	Data specified for col_data_num5 in sqcPDBload data conversion definition file
			udndata6	sqcPDBload	number	Data specified for col_data_num6 in sqcPDBload data conversion definition file
			udndata7	sqcPDBload	number	Data specified for col_data_num7 in sqcPDBload data conversion definition file
			udndata8	sqcPDBload	number	Data specified for col_data_num8 in sqcPDBload data conversion definition file
			udndata9	sqcPDBload	number	Data specified for col_data_num9 in sqcPDBload data conversion definition file
			udndata10	sqcPDBload	number	Data specified for col_data_num10 in sqcPDBload data conversion definition file
			udndata11	sqcPDBload	number	Data specified for col_data_num11 in sqcPDBload data conversion definition file
			udndata12	sqcPDBload	number	Data specified for col_data_num12 in sqcPDBload data conversion definition file
			udndata13	sqcPDBload	number	Data specified for col_data_num13 in sqcPDBload data conversion definition file
			udndata14	sqcPDBload	number	Data specified for col_data_num14 in sqcPDBload data conversion definition file
			udntxt1	sqcPDBload	text	Data specified for col_data_txt1 in sqcPDBload data conversion definition file
			udntxt2	sqcPDBload	text	Data specified for col_data_txt2 in sqcPDBload data conversion definition file
udntxt3	sqcPDBload	text	Data specified for col_data_txt3 in sqcPDBload data conversion definition file			

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			udntxt4	sqcPDBload	text	Data specified for col_data_txt4 in sqcPDBload data conversion definition file
			udntxt5	sqcPDBload	text	Data specified for col_data_txt5 in sqcPDBload data conversion definition file

### Note

A Record No. definition is required in order to set threshold value monitoring. The Record ID and Record No. correspondence is shown below.

Record ID	Record No.
UDATA_1	FJ1066
UDATA_2	FJ1067
UDATA_3	FJ1068
UDATA_4	FJ1069
UDATA_5	FJ1070
UDATA_6	FJ1341
UDATA_7	FJ1342
UDATA_8	FJ1343
UDATA_9	FJ1344
UDATA_10	FJ1345
UDATA_11	FJ1346
UDATA_12	FJ1347
UDATA_13	FJ1348
UDATA_14	FJ1349
UDATA_15	FJ1350
UDATA_16	FJ1351
UDATA_17	FJ1352
UDATA_18	FJ1353
UDATA_19	FJ1354
UDATA_20	FJ1355

### 4.2.30 No data/P2V simulation reports

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
resource_data_wide	OSRESOURCE_PROCESSOR	1351	osrcputime	Windows: Perfmon Linux:sar -u -P ALL Solaris:m pstat,	seconds	CPU time



Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
				sar - ackmpgq vwu		
			osrcpuce nt	Windows: Perfmon  Linux:sar -u -P ALL  Solaris:m pstat, sar - ackmpgq vwu	percent	CPU usage
			osrcpuost ypef		number	OS type  1 : Windows  2 : UNIX  (The data is output to the field of data_num14 when generated by sqcPDBcout (CSV Output Command).)
			osrcpuost ype		text	OS type ("Windows" or "UNIX")
resource_ data_wide	OSRESO URCE_M EMORY	1354	osrfreeme m	Windows: Perfmon  Linux:sar - qrSvwW BR  Solaris:v mstat -p	bytes	Available memory
			osrmemus ed	Windows: (None)  Linux:sar - qrSvwW BR  Solaris:v mstat -p	bytes	Memory usage  (Not collected under Windows.)
			osrmemu pcent	Windows: (None)  Linux:sar - qrSvwW BR  Solaris:v mstat -p	percent	Memory usage rate  (Not collected under Windows.)
			osrmemos typef		number	OS type  1 : Windows

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
						2 : UNIX  (The data is output to the field of data_num14 when generated by sqcPDBcout (CSV Output Command).)
			osrmemos type		text	OS type ("Windows" or "UNIX")
resource_data_wide	OSRESOURCE_P HYDISK	1357	osrpread	Windows: Perfmon  Linux:iostat -x -d  Solaris:iostat -xen	reads	Number of disk reads
			osrpwrit	Windows: Perfmon  Linux:iostat -x -d  Solaris:iostat -xen	writes	Number of disk writes
			osrprtran	Windows: Perfmon  Linux:iostat -x -d  Solaris:iostat -xen	transfers	Number of disk I/Os
			osrpreadbyt	Windows: Perfmon  Linux:iostat -x -d  Solaris:iostat -xen	bytes	Throughput of disk read
			osrpwritbyt	Windows: Perfmon  Linux:iostat -x -d  Solaris:iostat -xen	bytes	Throughput of disk write
			osrprtranbyt	Windows: Perfmon  Linux:iostat -x -d  Solaris:iostat -xen	bytes	Throughput of disk I/O
			osrpostypef		number	OS type  1 : Windows  2 : UNIX

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
						(The data is output to the field of data_num14 when generated by sqcPDBcout (CSV Output Command).)
			osrpostype		text	OS type ("Windows" or "UNIX")
resource_data_wide	OSRESOURCE_INTERFACE	1360	osrrecvpacket	Windows: Perfmon Linux:sar -n DEV -n EDEV Solaris 9:netstat -k Solaris 10/11:dladm show-dev -s -p	packets	Number of packets received for network
			osrsendpacket	Windows: Perfmon Linux:sar -n DEV -n EDEV Solaris 9:netstat -k Solaris 10/11:dladm show-dev -s -p	packets	Number of packets sent for network
			osrtotpkt	Windows: Perfmon Linux:sar -n DEV -n EDEV Solaris 9:netstat -k Solaris 10/11:dladm show-dev -s -p	packets	Number of packets for network
			osrrecvbyt	Windows: Perfmon Linux:sar -n DEV -n EDEV	bytes	Receive throughput for network

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
				Solaris 9:netstat -k Solaris 10/11:dladm show-dev -s -p		
			osrsendbyt	Windows: Perfmon Linux:sar -n DEV -n EDEV Solaris 9:netstat -k Solaris 10/11:dladm show-dev -s -p	bytes	Send throughput for network
			osrtotbyt	Windows: Perfmon Linux:sar -n DEV -n EDEV Solaris 9:netstat -k Solaris 10/11:dladm show-dev -s -p	bytes	Transmission throughput for network
			osrnostypef		number	OS type 1 : Windows 2 : UNIX (The data is output to the field of data_num14 when generated by sqcPDBcout (CSV Output Command).)
			osrnostype		text	OS type("Windows" or "UNIX")
resource_data	OSRESOURCE_SYSTEMINFO	FJ1387	tsysmem	Windows:wmi UNIX:prtconf/free	MB	Total physical memory size (actually available bytes)
			corenum	Windows:wmi UNIX:(None)	number	Number of cores (Not collected under Windows Server 2003, Solaris, and Linux.)

Table name	Record ID	Record No.	Field Name	Source	Unit of Measure	Description
			cpunum	Windows: wmi  UNIX:psr info/ cpuinfo	number	Number of logical CPUs
			processor	Windows: wmi  UNIX:un ame/ cpuinfo	MHz	CPU performance

## 4.3 Log Data (Troubleshooting) Information

This information is stored in the Troubleshoot directory of an Agent.



- The Troubleshoot directory stores server performance information collected by an Agent in CSV file format.
- It records more detailed information than the information stored in a Manager database.
- Only information about OS is stored in Troubleshoot. However, information about IPC resource with record ID of [UX\_IPC~] is not stored.
- The data format starts from the header column (explained below). Subsequent columns contain the same information as that contained in the fields listed in "4.2 Drilled-Down/Report Information".

### 4.3.1 Header formats other than WIN\_PROCESS and UX\_PROCESS

The following table lists the header format of all data other than WIN\_PROCESS and UX\_PROCESS.

Column position	Description	Remarks
1	8200:Record No.	'8200':Partial fixation,The corresponding record No enters the record No.
2	NULL	Fixed
3	System name	-
4	Record ID	-
5	Resource ID	-
6	start_date_time	GMT (Greenwich Mean Time)
7	end_date_time	GMT (Greenwich Mean Time)
8	TimeFlag	0:UTC 1: Local time
9	TimeZone	Difference at UTC and local time(minutes)
10	DaySave	Time for Daylight Saving Time(minutes)
11	Consol_flag	Fixed at 0
12	Console_interval	Collection interval (seconds)
13	Coverage	0 to 1

Column position	Description	Remarks
14-	Performance information	Same as information contained in the fields listed in " <a href="#">4.2 Drilled-Down/Report Information</a> ".

### 4.3.2 WIN\_PROCESS header format

The following table lists the header format of WIN\_PROCESS data.

Column position	Description	Remarks
1	8200:Record No.	'8200':Partial fixation,The corresponding record No enters the record No.
2	NULL	Fixed
3	System name	-
4	Record ID	'WIN_PROCESS'
5	Resource ID	-
6	start_date_time	GMT (Greenwich Mean Time)
7	end_date_time	GMT (Greenwich Mean Time)
8	TimeFlag	0:UTC 1: Local time
9	TimeZone	Difference at UTC and local time(minutes)
10	DaySave	Time for Daylight Saving Time(minutes)
11	Consol_flag	Fixed at 0
12	Console_interval	Collection interval (seconds)
13	Coverage	0 to 1
14	NULL	Fixed
15	NULL	Fixed
16	Process name	-
17	NULL	Fixed
18-	Performance information	Same as information contained in the fields listed in " <a href="#">4.2 Drilled-Down/Report Information</a> ".

### 4.3.3 UX\_PROCESS header format

The following table lists the header format of UX\_PROCESS data.

Column position	Description	Remarks
1	8200:Record No.	'8200':Partial fixation,The corresponding record No enters the record No.
2	NULL	Fixed
3	System name	-
4	Record ID	'UX_PROCESS'
5	Resource ID	-
6	start_date_time	GMT (Greenwich Mean Time)
7	end_date_time	GMT (Greenwich Mean Time)

Column position	Description	Remarks
8	TimeFlag	0:UTC 1: Local time
9	TimeZone	Difference at UTC and local time(minutes)
10	DaySave	Time for Daylight Saving Time(minutes)
11	Consol_flag	Fixed at 0
12	Console_interval	Collection interval (seconds)
13	Coverage	0 to 1
14	User name	-
15	Group name	-
16	Process name	-
17	NULL	-
18	NULL	-
19-	Performance information	Same as information contained in the fields listed in " <a href="#">4.2 Drilled-Down/Report Information</a> ".

## 4.4 Management Console Operation Log Information

Operation log information is information stored in the following directory on an operation management client:

<Installation directory>\log\OperationLog_Setting
---

### 4.4.1 Operation log file names

Operation logs are collected when the Management Console and Setting View are used. They are recorded under the file names shown in the following table.

Management Console	AdminConsole.YYYYMMDDhhmmsssss.log
Setng View	<i>console definition name</i> .YYYYMMDDhhmmsssss.log

#### Point

- YYYYMMDDhhmm indicates the date and time.
- sssss is an internally managed ID associated with each session.
- Operation log files are maintained for 30 days.

### 4.4.2 Operation log format

Operation logs are stored in CSV format.

Column position	Item	Remarks (sample output)
1	Time	Year/month/day hour:minute:second.millisecond (UTC)

Column position	Item	Remarks (sample output)
2	Host name or IP address of the machine that was operated	192.0.2.20
3	IP address of operation management client	192.0.2.20
4	Reserved	
5	Operation type	ConsoleDefineAdd
6	Target of operation	192.0.2.20
7	Content of operation	Console definition DefaultConsole was loaded from Manager (192.0.2.20).
8	Execution result	S
9	Component	SSQC definition window
10	Reserved	
11	Reserved	

 **Point**

- The time in row 1 is output in Coordinated Universal Time (UTC).
- The IP address in row 2 is the IP address of a proxy server if communication occurs via a proxy.
- The execution result in row 8 is output as "S" if successful and "F" if unsuccessful.
- The component in row 9 is set as "SSQC management console" or "SSQC definition window".



# Chapter 5 Messages

This chapter explains the messages that are output by this product.

These messages are output to the event log for Windows (type: application) or to syslog for Solaris and Linux.

There are the following types of message.

Type	Related section
Messages common to Windows and UNIX	<a href="#">"5.1 Common Messages"</a>
Windows-specific messages	<a href="#">"5.2 Windows-specific Messages"</a>
Solaris/Linux-specific messages	<a href="#">"5.3 UNIX-specific Messages"</a>
Error messages generated by FJSVcir	<a href="#">"5.4 Error messages generated by FJSVcir"</a>
Error messages generated by <b>Multiple Uninstallation and Management (middleware)</b> function	<a href="#">"5.5 Error messages generated by Multiple Uninstallation and Management (middleware) function"</a>

Refer to the messages for the platform being used.

## [Windows]

The following table lists the source names used by events for the Windows edition.

No.	Source name
1	DSA_Cmd
2	DSA_Event
3	DSA_Execute
4	DSA_File
5	DSA_Forwarder
6	DSA_Listener
7	DSA_Logfile
8	DSA_Manager
9	DSA_Spacemon
10	DSA_TIS
11	SSQC
12	SSQC DSA_Openreg
13	SSQC DSA_ORA
14	SSQC DSA_REG
15	SSQC License_tool
16	SSQC PDB_Reader
17	SSQC PDB_Writer

## 5.1 Common Messages

This section explains messages that are common to Windows, Solaris, and Linux.

Two event IDs are shown in the "Event ID" column. The top event ID is for Window and the bottom one is for Solaris and Linux.

Event ID	Category	Message	Action
0602	Error	Invalid argument '%1'.	[Meaning]
DSA0602E			Invalid parameter passed to a function in an internal process. %1: Parameter [Action] Collect the maintenance information and contact a systems engineer.
1000	Information	%1 started.	[Meaning]
DSA1000I			Process has started. %1: Process name [Action] No action is necessary.
1001	Information	%1 stopped.	[Meaning]
DSA1001I			Process has stopped. %1: Process name [Action] No action is necessary.
1200	Information	Started DSA '%1' (%2)	[Meaning]
DSA1200I			DSA has started. %1: DSA name %2: Module path [Action] No action is necessary.
1202	Information	Sending stop signal to DSA '%1'	[Meaning]
DSA1202I			Stop signal transmitted to DSA. %1: DSA name [Action] No action is necessary.
1302	Error	Stopping DCM due to the critical space notification.	[Meaning]
DSA1302E			Systemwalker SQC DCM service/dcmd process stopped because disk usage reached the critical threshold. [Action] Reserve enough free disk space, and then restart Systemwalker SQC DCM service/dcmd process.

Event ID	Category	Message	Action
1304	Error	Too many attempts to start process. DCM cannot restart. : %1.	[Meaning]
DSA1304E			<p>Process %1 is stopping because it cannot restart.</p> <p>The problem might occur by a coordinated product.</p> <p>[Action]</p> <p>Restart Systemwalker SQC DCM service/dcmd process.</p> <p>Restart the Systemwalker SQC DCM service/dcmd process after removing the problem when the problem occurs by a coordinated product.</p> <p>&lt;In case of Interstage Application Server linking (under Java EE environment) or WebLogicServer linking(*)&gt;</p> <p>Check that the path specified to the JAVA_HOME key in template.dat is correct.</p> <p>If it is wrong, correct it, setup, and then restart Systemwalker SQC DCM service/dcmd process.</p> <p>*)</p> <p>In case that the string of "Process %1" includes "java".</p>
1310	Error	DCM cannot start because at least one DSA is already running.	[Meaning]
DSA1310E			<p>More than one DSA service/daemon is running, therefore Systemwalker SQC DCM service/dcmd process cannot start.</p> <p>[Action]</p> <p>If Systemwalker SQC DCM service/dcmd process was started soon after stopping a DSA service/daemon, then Systemwalker SQC DCM service/dcmd process may not start because the DSA service/daemon is still in the process of stopping.</p> <p>Pause for a short time and confirm that DSA service/daemon has stopped, then try starting Systemwalker SQC DCM service/dcmd process again.</p> <p>If it cannot be restarted after the short pause, collect the maintenance information and contact a systems engineer.</p>
1551	Error	DSA: %1. Thread %2.%n,Parameter '%3' is incorrect. DSA will terminate.	[Meaning]
DSA1551E			<p>Invalid parameters in the operation definition file.</p> <p>%1: DSA name</p> <p>%2: Thread ID</p> <p>%3: Parameter</p> <p>[Action]</p>

Event ID	Category	Message	Action
			Collect the maintenance information and contact a systems engineer.
1565	Error	Failed to read performance data from the remote machine %1 %2	[Meaning]  Failed to acquire performance data from remote machine.  %1: Remote machine name %2: Error message  [Action]  Collect the maintenance information and contact a systems engineer.
DSA1565E			
1566	Error	Logon failed. Check that the 'domain', 'user', and 'password' parameters are correct.  %1	[Meaning]  Failed to log in. Invalid parameters in the connection definition file.  %1: Error message  [Action]  Collect the maintenance information and contact a systems engineer.
DSA1566E			
1701	Error	Failed to open PDB database: %1.	[Meaning]  Failed to open the PDB.  %1: Error message  [Action]  Collect the maintenance information and contact a systems engineer.
DSA1701E			
1800	Information	PDB database is created successfully.	[Meaning]  PDB was created successfully.  [Action]  No action is necessary.
DSA1800I			
1900	Error	Failed to open PDB database: %1.	[Meaning]  Failed to open the PDB.  %1: Error message  [Action]  Collect the maintenance information and contact a Fujitsu SE.
DSA1900E			
1902	Error	Failed to create PDB database, SQL file execution failed: %1.	[Meaning]  Failed to create the PDB.  %1: Error message  [Action]  Collect the maintenance information and contact a systems engineer.
DSA1902E			
1903	Error	Failed to create PDB database, SQL file execution failed: %1.	[Meaning]  Failed to create the PDB.
DSA1903E			

Event ID	Category	Message	Action
			<p>% 1: Error message</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer</p>
1906	Error	Failed to execute transaction against the PDB database: %1.	[Meaning]
DSA1906E			<p>Failed to execute transaction against the PDB database.</p> <p>% 1:Error message</p> <p>[Action]</p> <p>This message is normally output when an error occurs while a record is being written to the PDB.</p> <p>If the message indicates that the "database is locked", there may be a conflict between the process of writing collected data and the process of reading content display. If this problem does not occur frequently, no action is necessary.</p> <p>In all other cases, collect the maintenance information and contact a systems engineer.</p>
1907	Error	Failed to update PDB database, SQL file execution failed: %1	[Meaning]
DSA1907E			<p>Failed to update the PDB.</p> <p>% 1: Error message</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer</p>
1908	Error	Failed to update PDB database, TRD file execution failed: %1.	[Meaning]
DSA1908E			<p>Failed to update the PDB.</p> <p>% 1: Error message</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
1909	Error	Database update error. Failed to create field_name_backup table: %1.	[Meaning]
DSA1909E			<p>Failed to update the PDB.</p> <p>% 1: Error message</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
1910	Error	Database update error. Failed to delete field_name_backup table: %1.	[Meaning]
DSA1910E			<p>Failed to update the PDB.</p> <p>% 1: Error message</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>

Event ID	Category	Message	Action
1911	Error	Failed to allocate memory block: out of memory.	[Meaning]
DSA1911E			Failed to allocate memory block: out of memory.  [Action]  If system memory has become exhausted, resolve this memory shortage problem. In all other cases, collect the maintenance information and contact a systems engineer.
1912	Error	Failed to attach database '%1': %2.	[Meaning]
DSA1912E			Failed to attach file to PDB.  %1: Database file name %2: Error message  [Action]  Collect the maintenance information and contact a systems engineer.
1913	Error	Failed to create data database, SQL file execution failed: %1.	[Meaning]
DSA1913E			Failed to create the PDB.  %1: Error message  [Action]  Collect the maintenance information and contact a systems engineer.
1914	Error	Failed to execute system register SQL against the PDB database: %1.	[Meaning]
DSA1914E			Failed to execute system register against the PDB database.  %1:Error message  [Action]  Collect the maintenance information and contact a systems engineer.
1915	Error	Failed to read the PDB database configuration from the system_database table.	[Meaning]
DSA1915E			Failed to read PDB definition.  [Action]  Collect the maintenance information and contact a systems engineer.
1916	Error	Failed to detach database '%1': %2.	[Meaning]
DSA1916E			Failed to detach file from PDB.  %1: Database file name %2: Error message  [Action]  Collect the maintenance information and contact a systems engineer.
1917	Error	Failed to open database file '%1': %2.	[Meaning]
DSA1917E			Failed to open the PDB.

Event ID	Category	Message	Action
			%1:Path name %2:Error message [Action] Collect the maintenance information and contact a systems engineer.
1918 DSA1918E	Error	Failed to read the PDB database tables information from the system_tables table.	[Meaning] Failed to read PDB table information. [Action] Collect the maintenance information and contact a systems engineer.
1919 DSA1919E	Error	Failed to access/create PDB database directory '%1': %2	[Meaning] Failed to access/create PDB directory. %1: Directory name %2: Error message [Action] Collect the maintenance information and contact a systems engineer.
2000 DSA2000I	Information	The module received the Stop signal.	[Meaning] The process received a stop instruction. [Action] No action is necessary.
2001 DSA2001I	Information	Remote server is %1 on port %2.	[Meaning] Displays remote server information. %1:Host name or IP address %2:Port number [Action] No action is necessary.
2002 DSA2002I	Information	Listening on port %1.	[Meaning] This message indicates that a connection is waiting to be established. %1:Port number [Action] No action is necessary.
2100 DSA2100E	Error	DSA initialization failed with code %1.	[Meaning] Failed to initialize during DSA startup. %1: Error code [Action] Collect the maintenance information and contact a systems engineer.
2101	Error	The module halted due to an unrecoverable error.	[Meaning]

Event ID	Category	Message	Action
DSA2101E			<p>The process has stopped due to an unrecoverable error.</p> <p>[Action]</p> <p>A message showing details about the error is output before this message, so use that message to correct the problem.</p>
2102	Error	No server name specified.	[Meaning]
DSA2102E			<p>No server name is specified for the Manager to be connected to.</p> <p>[Action]</p> <p>Correctly specify the name of the server for the Manager to be connected to in the "server=" part of the [DsaForwarder] and [DsaForwarder_sum] sections in the DSAconfiguration.txt file.</p>
2103	Error	No port or service name specified.	[Meaning]
DSA2103E			<p>No port number was specified for the remote Manager.</p> <p>[Action]</p> <p>Ensure that the "port=2344" segment of the [DsaForwarder] and [DsaForwarder_sum] sections in the DSAconfiguration.txt file is correct.</p>
2174	Error	Failed to parse config section. %1	[Meaning]
DSA2174E			<p>Failed to parse section.</p> <p>%1: Section name</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
2175	Error	Failed to validate config section. %1	[Meaning]
DSA2175E			<p>Failed to enable section.</p> <p>%1: Section name</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
2176	Error	Failed to open and parse the DSA groups file '%1'. %2%3	[Meaning]
DSA2176E			<p>Failed to open or parse DSA groups file.</p> <p>%1: File name</p> <p>%2:</p> <p>%3:</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>



Event ID	Category	Message	Action
2177	Error	DSA groups file '%1' does not define any groups.	[Meaning]
DSA2177E			Groups not defined in DSA groups file. %1: File name [Action] Collect the maintenance information and contact a systems engineer.
2300	Error	The DSA function %1 failed with error: %2	[Meaning]
DSA2300E			Processed failed. %1:Process name %2: Error code [Action] Collect the maintenance information and contact a systems engineer.
2301	Error	The input record is invalid: %1	[Meaning]
DSA2301E			The input record is invalid. %1: Record [Action] Collect the maintenance information and contact a systems engineer.
2302	Error	No default or input command is specified for record: %1	[Meaning]
DSA2302E			Record does not contain valid information. %1: Record [Action] Collect the maintenance information and contact a systems engineer.
2304	Error	Failed to get the return code for the command '%1'. System error: %2	[Meaning]
DSA2304E			Failed to get the return code for the command. %1: Command name %2: Error code [Action] Collect the maintenance information and contact a systems engineer.
2305	Error	Memory allocation failed for a block size of %1	[Meaning]
DSA2305E			Memory allocation failed. %1:Size of block of memory tried to be allocated [Action] If system memory has become exhausted, resolve this memory shortage problem. In all other cases, contact a Fujitsu SE.
2306	Error	Failed to open bad file. DSA error=%1	[Meaning]

Event ID	Category	Message	Action
DSA2306E			Failed to open the "bad" file. %1: Error Code [Action] Collect the maintenance information and contact a systems engineer.
2307	Error	Invalid specified or default '%1=%2'	[Meaning] Specified parameter is invalid. %1: Parameter name %2: Value [Action] Make sure that there are no errors in the definition, and then execute sqcSetPolicy (Policy Application Command).
DSA2307E			
2308	Error	Unable to obtain the path to the working directory.	[Meaning] Unable to acquire the working directory path. [Action] Collect the maintenance information and contact a systems engineer.
DSA2308E			
2309	Error	Command '%1' is not processed.	[Meaning] Command not processed. %1: Command name [Action] Collect the maintenance information and contact a systems engineer.
DSA2309E			
2310	Error	At least one each of a RDF and TDF file must be specified if TIS processing is required.	[Meaning] RDF or TDF file not specified. [Action] Collect the maintenance information and contact a systems engineer.
DSA2310E			
2311	Error	Invalid parameter format: '%1=%2'.	[Meaning] Invalid parameter format. %1: Parameter name %2: Value [Action] Collect the maintenance information and contact a systems engineer.
DSA2311E			
2312	Error	Failed to find %1 file '%2'.	[Meaning] File does not exist. %1: File type %2: File name [Action]
DSA2312E			

Event ID	Category	Message	Action
			Collect the maintenance information and contact a systems engineer.
2313	Error	Failed to open file '%1'. Command '%2' is not processed. Error = %3.	[Meaning]  Command not executed due to failure to open file.  %1: File name  %2: Command name  %3: Error code  [Action]  Collect the maintenance information and contact a systems engineer.
DSA2313E			
2314	Error	Maximum command process time of %1 seconds exceeded. Command aborted: %2	[Meaning]  Maximum command process time exceeded. Processing stopped.  %1: Second  %2: Command name  [Action]  Collect the maintenance information and contact a systems engineer.
DSA2314E			
2315	Error	Internal error: Invalid parameter passed to a function.	[Meaning]  An internal error occurred.  [Action]  Collect the maintenance information and contact a systems engineer.
DSA2315E			
2316	Error	TIS interface error=%1.	[Meaning]  TIS interface error occurred.  %1: Error code  [Action]  Collect the maintenance information and contact a systems engineer.
DSA2316E			
2317	Error	TIS error=%1	[Meaning]  TIS error occurred.  %1: Error code  [Action]  Collect the maintenance information and contact a systems engineer.
DSA2317E			
2318	Error	Failed to execute command %1. Error=%2.	[Meaning]  Command failed.  %1: Command name  %2: Error code  [Action]
DSA2318E			

Event ID	Category	Message	Action
			Collect the maintenance information and contact a systems engineer.
2319	Error	Command to be executed is empty.	[Meaning]
DSA2319E			Command to be executed is empty. [Action] Collect the maintenance information and contact a systems engineer.
2320	Error	The command '%1' could not be expanded.	[Meaning]
DSA2320E			Command could not be expanded. %1: Command name [Action] Collect the maintenance information and contact a systems engineer.
2321	Error	The command '%1' expanded to a size greater than the maximum allowable size of %2.	[Meaning]
DSA2321E			Expanded size of command exceeds its allocated size. %1: Command name %2: Size [Action] Collect the maintenance information and contact a systems engineer.
2322	Error	Failed to find command '%1'.	[Meaning]
DSA2322E			Failed to find command. %1: Command name [Action] Collect the maintenance information and contact a systems engineer.
2326	Error	Failed to open file '%1'. Error = %2.	[Meaning]
DSA2326E			Failed to open the file. %1: File name %2: Error code [Action] Collect the maintenance information and contact a systems engineer.
2327	Error	Entry point '%1' not found in module '%2'. Error=%3.	[Meaning]
DSA2327E			Entry point not found. %1: Entry point name %2: Module name %3: Error code [Action]

Event ID	Category	Message	Action
			Collect the maintenance information and contact a systems engineer.
2330	Error	Failed to read from file '%1'. Error=%2.	[Meaning]
DSA2330E			Failed to read the file.  %1: File name %2: Error code  [Action] Collect the maintenance information and contact a systems engineer.
2500	Error	Invalid parameters.	[Meaning]
DSA2500E			Invalid parameters.  [Action] Collect the maintenance information and contact a systems engineer.
2502	Error	Failed to write a record into a temporary output file.	[Meaning]
DSA2502E			Failed to write a record into a temporary output file.  It might be a capacity shortage of output destination of log data (Troubleshoot).  [Action] Please secure the free space of the disk in log data (Troubleshoot) output destination, and restart the residing process.  If the problem cannot be resolved with the above mentioned action, collect the maintenance information and contact a systems engineer.
2503	Error	Failed to access the output file '%1'	[Meaning]
DSA2503E			Failed to access the output file.  %1: File name  [Action] There is a possibility of conflict of acquisition of file with software such as anti-virus or backup. Verify that the software such as anti-virus or backup was not running at the time period when this message was output.  If the software was running, refer to "Troubleshooting Relating to Combining SQC with Other Software" in the <i>Troubleshooting Guide</i> and take necessary actions.  In all other cases, collect the maintenance information and contact a systems engineer.
2505	Error	Failed to rename the file '%1' to '%2'.	[Meaning]

Event ID	Category	Message	Action
DSA2505E			<p>Failed to rename the file.</p> <p>% 1: Old file name</p> <p>%2: New file name</p> <p>[Action]</p> <p>There is a possibility of conflict of acquisition of file with software such as anti-virus or backup.</p> <p>Verify that the software such as anti-virus or backup was not running at the time period when this message was output.</p> <p>If the software was running, refer to "Troubleshooting Relating to Combining SQC with Other Software" in the <i>Troubleshooting Guide</i> and take necessary actions.</p> <p>In all other cases, collect the maintenance information and contact a systems engineer.</p>
2506	Error	Failed to open the temporary output file '% 1'	[Meaning]
DSA2506E			<p>Failed to open the temporary output file.</p> <p>% 1: File name</p> <p>[Action]</p> <p>There is a possibility of conflict of acquisition of file with software such as anti-virus or backup.</p> <p>Verify that the software such as anti-virus or backup was not running at the time period when this message was output.</p> <p>If the software was running, refer to "Troubleshooting Relating to Combining SQC with Other Software" in the <i>Troubleshooting Guide</i> and take necessary actions.</p> <p>In all other cases, collect the maintenance information and contact a systems engineer.</p>
2507	Error	Failed to append file '% 1' to '% 2'.	[Meaning]
DSA2507E			<p>Could not add to file.</p> <p>% 1: Input file name</p> <p>%2: Output file name</p> <p>[Action]</p> <p>Verify that there is space available in the temporary directory.</p> <p>If there is space available, collect the maintenance information and contact a systems engineer.</p>
2508	Error	Failed to access/create output directory '% 1': % 2.	[Meaning]
DSA2508E			<p>Failed to access/create output directory.</p> <p>% 1: Directory name</p>

Event ID	Category	Message	Action
			<p>%2: Error code</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
2700	Error	Unable to connect to the server.	[Meaning]
DSA2700E			<p>An attempt to connect to the Manager has failed.</p> <p>[Action]</p> <p>Check the following:</p> <ol style="list-style-type: none"> <li>1. Check that the Manager is operating correctly.</li> <li>2. Check that a network connection to the Manager can be established.</li> <li>3. Check that the Manager host name or IP address defined in the relevant server is correct.</li> </ol> <p>For the methods used to check and change definitions, refer to Section 6.4.1, "Changing the IP address of the Manager that is recognized by Agents and Proxy Managers" in the <i>Installation Guide</i>.</p> <ol style="list-style-type: none"> <li>4. This message may be output after the high load on the Agent/Proxy Manager system that triggered the message has since been reduced. If this occurs, restart the Systemwalker SQC DCM service/dcmd process and see if this rectifies the problem.</li> </ol> <p>If the message appears even after taking the above action, collect the maintenance information and contact a systems engineer.</p>
2701	Error	Unable to transmit data to the server.	[Meaning]
DSA2701E			<p>Data could not be sent to the Manager.</p> <p>[Action]</p> <p>If this message is not output repeatedly, the failure to transfer was temporary and transmission was restored, therefore no action is necessary.</p> <p>If the message continues to appear check the following:</p> <p>Check whether the Manager is running correctly</p> <p>If the Manager is operating normally, collect the maintenance information and contact a systems engineer.</p>
2702	Error	Login rejected by the server.	[Meaning]
DSA2702E			<p>Login to the Manager was refused.</p> <p>[Action]</p> <p>Check whether the Manager is running correctly.</p>

Event ID	Category	Message	Action
			If the Manager is operating normally, collect the maintenance information and contact a systems engineer.
2951	Error	System call (%1) failed: %2	[Meaning]
DSA2951E			System call failed. %1: System call name %2: Error message [Action] Collect the maintenance information and contact a systems engineer.
3073	Warning	Maximum command process time of %1 seconds exceeded. Command aborted: %2.	[Meaning]
DSA3073W			Because the command executed to collect performance information at collection intervals of one to ten minutes exceeded the %1 second, processing has been stopped. %1: Execution watch time of the command %2: Detailed information [Action] This message will output when the processing of the command is delayed because of the high system load etc. The action is unnecessary if not generated frequently at collection intervals. If the detailed information is "netstat -an", refer to section 3.1, "I cannot collect WIN_NET_SYSTEM or UX_NET_SYSTEM information" in the Troubleshooting Guide.
3100	Error	The DSA function '%1' failed. Error='%2'.	[Meaning]
DSA3100E			Processed failed. %1: Function name %2: Error code [Action] Collect the maintenance information and contact a systems engineer.
3101	Error	The specified end date and time of '%1' is not greater than the start date and time of '%2'.	[Meaning]
DSA3101E			The specified end date and time is later than the start date and time. %1: End date %2: Start date [Action] Collect the maintenance information and contact a systems engineer.
3102	Error	The specified interval is not valid: %1=%2'.	[Meaning] The specified interval is not valid.



Event ID	Category	Message	Action
DSA3102E			%1: Interval %2: Value [Action] Collect the maintenance information and contact a systems engineer.
3104	Error	Invalid specified or default '%1=%2'.	[Meaning] Invalid parameter format. %1: Parameter %2: Value [Action] Make sure that there are no errors in the definition, and then execute sqcSetPolicy (Policy Application Command).
DSA3104E			
3105	Error	Invalid parameter format: '%1=%2'.	[Meaning] Invalid parameter format. %1: Parameter %2: Value [Action] Collect the maintenance information and contact a systems engineer.
DSA3105E			
3106	Error	Unable to convert date and/or time '%1=%2' parameter to valid time.	[Meaning] Unable to convert time parameter to valid time. %1: Time %2: Value [Action] Collect the maintenance information and contact a systems engineer.
DSA3106E			
3108	Error	Failed to parse the bad file name '%1'.	[Meaning] Failed to parse file name. %1: File name [Action] Collect the maintenance information and contact a systems engineer.
DSA3108E			
3109	Error	The parameter '%1=%2' is less than zero.	[Meaning] The parameter is less than 0. %1: Parameter %2: Value [Action] Collect the maintenance information and contact a systems engineer.
DSA3109E			
3110	Error	Failed to find %1 file '%2'.	[Meaning]

Event ID	Category	Message	Action
DSA3110E			File does not exist. %1: Type %2: File name [Action] Collect the maintenance information and contact a systems engineer.
3111	Error	At least one each of a RDF and TDF file must be specified if TIS processing is required.	[Meaning]
DSA3111E			Specify either a RDF or TDF file. [Action] Collect the maintenance information and contact a systems engineer.
3115	Error	Unable to obtain the path to the working directory.	[Meaning]
DSA3115E			Unable to obtain the path to the working directory. [Action] Collect the maintenance information and contact a systems engineer.
3116	Error	Failed to find command '%1'.	[Meaning]
DSA3116E			Failed to find command. %1: Command name [Action] Collect the maintenance information and contact a systems engineer.
3117	Error	Failed to load module '%1'. Error=%2.	[Meaning]
DSA3117E			Failed to load module. %1: Module name %2: Error code [Action] Collect the maintenance information and contact a systems engineer.
3118	Error	Entry point '%1' not found in module '%2'. Error=%3.	[Meaning]
DSA3118E			Entry point not found. %1: Entry point name %2: Module name %3: Error code [Action] Collect the maintenance information and contact a systems engineer.
3119	Error	The module '%1' failed to initialize. Error=%2.	[Meaning]
DSA3119E			Initialization failed. %1: Module name

Event ID	Category	Message	Action
			%2: Error code [Action] Collect the maintenance information and contact a systems engineer.
3120	Error	The command '%1' could not be expanded.	[Meaning] Command could not be expanded. %1: Command name [Action] Collect the maintenance information and contact a system engineer.
DSA3120E			
3121	Error	The command '%1' expanded to a size greater than the maximum allowable size of %2.	[Meaning] Expanded size of command exceeds its allocated size. %1: Command name %2: Size [Action] Collect the maintenance information and contact a system engineer.
DSA3121E			
3123	Error	Command to be executed is empty.	[Meaning] Command to be executed is empty. [Action] Collect the maintenance information and contact a systems engineer.
DSA3123E			
3125	Error	Failed to create file '%1'. Command '%2' is not processed. Error=%3.	[Meaning] Command not executed due to failure to create file. %1: File name %2: Command name [Action] Collect the maintenance information and contact a system engineer.
DSA3125E			
3126	Error	Failed to open file '%1'. Command '%2' is not processed. Error = %3.	[Meaning] Command not executed due to failure to open file. %1: File name %2: Command name [Action] Collect the maintenance information and contact a systems engineer.
DSA3126E			
3127	Error	Failed to read from file '%1'. Error=%2.	[Meaning] Failed to read the file. %1: File name
DSA3127E			

Event ID	Category	Message	Action
			%2: Error code [Action] Collect the maintenance information and contact a systems engineer.
3129	Error	Failed to execute command %1. Error=%2	[Meaning] Failed to execute command. %1: Command name %2: Error code [Action] This is not a problem if it does not occur too frequently.
DSA3129E			
3130	Error	Failed to obtain the return code for the command '%1'. Error=%2	[Meaning] Failed to obtain the return code for the command. %1: Command name %2: Error code [Action] Collect the maintenance information and contact a system engineer.
DSA3130E			
3133	Error	Memory allocation failed for a block size of %1.	[Meaning] Memory allocation failed. %1:Size of block of memory tried to be allocated [Action] If system memory has become exhausted, resolve this memory shortage problem. In all other cases, contact a Fujitsu SE.
DSA3133E			
3136	Error	Failed to open bad file. DSA error=%1.	[Meaning] Failed to open the "bad" file. %1: Error code [Action] Collect the maintenance information and contact a systems engineer.
DSA3136E			
3138	Error	TIS interface error=%1.	[Meaning] TIS interface error occurred. %1: Error code [Action] Collect the maintenance information and contact a system engineer.
DSA3138E			
3139	Error	TIS errors=%1	[Meaning] TIS error occurred. %1: Error code
DSA3139E			

Event ID	Category	Message	Action
			[Action] Collect the maintenance information and contact a systems engineer.
3140	Error	Failed to set TIS tag data.	[Meaning] Failed to set TIS tag data.
DSA3140E			[Action] Collect the maintenance information and contact a system engineer.
3141	Error	Parser failed to return any commands.	[Meaning] Parser failed to return any commands.
DSA3141E			[Action] Collect the maintenance information and contact a systems engineer.
3142	Error	Parser returned error=%1.	[Meaning] Parser returned an error. %1: Error code
DSA3142E			[Action] Collect the maintenance information and contact a systems engineer.
3147	Error	The number of errors has exceeded the maximum of %1.	[Meaning] Maximum number of errors exceeded. %1: Maximum number
DSA3147E			[Action] Collect the maintenance information and contact a systems engineer.
3150	Error	Internal error: Invalid parameter passed to a function.	[Meaning] An internal error occurred.
DSA3150E			[Action] Collect the maintenance information and contact a systems engineer.
3151	Error	The parameter '%1' could not be expanded.	[Meaning] Parameter could not be expanded. %1:Paremeter
DSA3151E			[Action] Collect the maintenance information and contact a systems engineer.
3200	Error	Failed to open TIS session. %1.	[Meaning] Failed to open TIS session. %1:
DSA3200E			[Action]

Event ID	Category	Message	Action
			Collect the maintenance information and contact a systems engineer.
3201	Error	Failed to receive an input DSA record.	[Meaning]
DSA3201E			Failed to receive an input DSA record. [Action] Collect the maintenance information and contact a systems engineer.
3202	Error	Error processing record with TIS. %1	[Meaning]
DSA3202E			An error occurred in TIS. %1: Error code [Action] Collect the maintenance information and contact a systems engineer.
3203	Error	Failed to output the processed records.	[Meaning]
DSA3203E			The process of outputting a record to a file has failed. [Action] The following problems may have caused this error, so examine any messages output immediately before this one and take whatever action is appropriate. If there is no free disk space, increase the amount of available space. If an I/O error occurred, investigate the cause of the error. In all other cases, collect the maintenance information and contact a systems engineer.
3204	Error	Error processing input records.	[Meaning]
DSA3204E			Error processing input records. [Action] Collect the maintenance information and contact a systems engineer.
3205	Error	Error getting checkpoint data from TIS. %1.	[Meaning]
DSA3205E			Failed to acquire checkpoint from TIS. %1: [Action] Collect the maintenance information and contact a system engineer.
3206	Error	Error getting start checkpoint data.	[Action]
DSA3206E			Failed to acquire a start checkpoint. [Meaning] Collect the maintenance information and contact a systems engineer.

Event ID	Category	Message	Action
3207	Error	Configuration parameter '% 1' is invalid.	[Meaning] Configuration parameter is invalid. % 1: Parameter [Action] Collect the maintenance information and contact a systems engineer.
DSA3207E			
3208	Error	Failed to load % 1. %2.	[Meaning] Failed to load library. % 1: Path name %2: Error message [Action] Collect the maintenance information and contact a systems engineer.
DSA3208E			
3209	Error	Entry point '% 1' was not found in %2.	[Meaning] Entry point not found. % 1: Entry point name %2: Library name [Action] Collect the maintenance information and contact a systems engineer.
DSA3209E			
3210	Error	Initialization of % 1 failed with code %2.	[Meaning] Initialization failed. % 1: Library name %2: Error code [Action] Collect the maintenance information and contact a systems engineer.
DSA3210E			
3600	Information	Free disk space on path % 1 is no longer under threshold	[Meaning] Free disk space is now over the threshold. % 1: Path name [Action] No action required.
DSA3600I			
3650	Warning	Free disk space on path % 1 reached warning level of %2 MB	[Meaning] Free disk space has reached the warning level. % 1: Path name %2: Size [Action] Reserve enough free disk space.
DSA3650W			
3700	Error	DSA record type is not specified.	[Meaning] DSA record type was not specified.
DSA3700E			

Event ID	Category	Message	Action
			[Action] Collect the maintenance information and contact a systems engineer.
3702 DSA3702E	Error	At least one path must be specified for monitoring.	[Meaning] A path was not specified in the disk space monitoring settings. [Action] Refer to "Monitoring Available Disk Space" in the <i>Installation Guide</i> and check the settings.
3703 DSA3703E	Error	Monitoring parameter '%1' must be of the following form:%n <warning limit>,<critical limit>,<path to monitor>	[Meaning] Disk space monitoring settings are invalid. %1: Monitoring parameter [Action] Refer to "Monitoring Available Disk Space" in the <i>Installation Guide</i> and check the settings.
3704 DSA3704E	Error	Free disk space on path %1 reached critical level of %2 MB	[Meaning] Disk space has reached the error level, therefore resident processes have been stopped to protect the system. %1: Path name %2: Size [Action] Reserve enough free disk space, and then restart resident processes.
3705 DSA3705E	Error	Free disk space on path %1 reached critical level of %2 MB	[Meaning] Resident processes will stop in order to protect the system. %1: Pass name %2: Size [Action] Reserve enough free disk space, and then restart resident processes.
3800 DSA3800E	Error	Failed to open TIS session. %1.	[Meaning] Failed to open TIS session. %1: Error message [Action] Collect the maintenance information and contact a systems engineer.
3801 DSA3801E	Error	Event type name parameter is not specified in the DSA_EVENT configuration.	[Meaning] Event type was not specified. [Action]



Event ID	Category	Message	Action
			Collect the maintenance information and contact a systems engineer.
3802	Error	Failed to initialize event transfer.	[Meaning]
DSA3802E			Initialization failed. [Action] Collect the maintenance information and contact a systems engineer.
3803	Error	Error processing record with TIS. %1.	[Meaning]
DSA3803E			An error occurred in TIS record processing. %1: Error message [Action] Collect the maintenance information and contact a systems engineer.
3804	Error	Failed to output the processed records.	[Meaning]
DSA3804E			Failed to output the processed records. [Action] Collect the maintenance information and contact a systems engineer.
3805	Error	Failed to receive an input event.	[Meaning]
DSA3805E			Failed to receive an input event. [Action] Collect the maintenance information and contact a systems engineer.
3806	Error	Error processing input records.	[Meaning]
DSA3806E			Error processing input records. [Action] Collect the maintenance information and contact a systems engineer.
4100	Error	ARM initialization failed with code %1.	[Meaning]
DSA4100E			Failed to initialize ARM. %1: Error code [Action] Collect the maintenance information and contact a system engineer.
4221	Error	Memory allocation failed for a block size of %1.	[Meaning]
DSA4221E			Failed to allocate memory block: out of memory. %1: Size [Action] If system memory has become exhausted, resolve this memory shortage problem. In all

Event ID	Category	Message	Action
			other cases, collect the maintenance information and contact a systems engineer.
4450	Error	Failed to open %1: %2.	[Meaning]
DSA4450E			Failed to open the file. %1: File name %2: Error message [Action] Collect the maintenance information and contact a systems engineer.
4500	Error	Agent '%1' is responding now.	[Meaning]
DSA4500I			The named agent is responding. %1:Agent name [Action] No action required
4525	Error	Failed to open the "bad" file. Verify that the configuration parameters 'bad_file_dir' and 'bad_file_name' are specified correctly. "Bad" file logging is disabled.	[Meaning]
DSA4525W			Failed to open the "bad" file. [Action] Collect the maintenance information and contact a systems engineer.
4550	Error	The configuration parameter '%1' is incorrect.	[Meaning]
DSA4550E			Invalid definition parameters. %1:Parameter name [Action] Collect the maintenance information and contact a systems engineer.
4551	Error	Failed to obtain the configuration parameter '%1'.	[Meaning]
DSA4551E			Failed to acquire definition parameters. %1: Parameter name [Action] Collect the maintenance information and contact a systems engineer.
4552	Error	The configuration parameter 'snmp_agent' field 'Agent ID' is incorrect.	[Meaning]
DSA4552E			Error in Agent ID field of the definition parameters snmp_agent. [Action] Collect the maintenance information and contact a systems engineer.
4553	Error	The configuration parameter 'snmp_agent' field 'SNMP version' is incorrect.	[Meaning]
DSA4553E			Error in SNMP version field of the definition parameters snmp_agent. [Action]

Event ID	Category	Message	Action
			Collect the maintenance information and contact a systems engineer.
4554	Error	The configuration parameter 'snmp_agent' field 'agent address' is incorrect.	[Meaning]
DSA4554E			Error in agent address field of the definition parameters snmp_agent. [Action] Collect the maintenance information and contact a systems engineer.
4555	Error	The configuration parameter 'snmp_agent' field 'agent ID' is too long.	[Meaning]
DSA4555E			Agent ID field of the definition parameters snmp_agent is too long. [Action] Collect the maintenance information and contact a systems engineer.
4556	Error	The internal net-snmp configuration file name is too long.	[Meaning]
DSA4556E			File name of the definition file is too long. [Action] Collect the maintenance information and contact a systems engineer.
4557	Error	The net-snmp MIB path is too long.	[Meaning]
DSA4557E			Path name of the MIB is too long. [Action] Collect the maintenance information and contact a systems engineer.
4558	Error	Cannot create the internal net-snmp configuration file.	[Meaning]
DSA4558E			Could not create definition file. [Action] Collect the maintenance information and contact a systems engineer.
4559	Error	At least one parameter '%1' must be defined.	[Meaning]
DSA4559E			Parameter is not defined. %1: Parameter name [Action] Collect the maintenance information and contact a systems engineer.
4560	Error	Failed to generate password '%1'. The password is incorrect or too small. %2	[Meaning]
DSA4560E			Failed to generate password. There is an error in the password, or it is too short. %1: Password %2: Error message [Action]

Event ID	Category	Message	Action
			Collect the maintenance information and contact a systems engineer.
4561	Error	Failed to open a session with the SNMP agent '%1'.  %2	[Meaning]  Failed to open session with SNMP agent.  %1: SNMP agent name  %2: Error message  [Action]  Collect the maintenance information and contact a systems engineer.
DSA4561E			
4562	Error	Not enough memory.	[Meaning]  There is insufficient memory.  [Action]  If system memory has become exhausted, resolve this memory shortage problem.  In all other cases, collect the maintenance information and contact a systems engineer.
DSA4562E			
4563	Error	Failed to open a TIS session.  %1	[Meaning]  Failed to open TIS session.  [Action]  Collect the maintenance information and contact a systems engineer.
DSA4563E			
4564	Error	TIS processing failed.  %1  Record:  %2	[Meaning]  Failed to process TIS.  %1: Error message  %2: Record  [Action]  Collect the maintenance information and contact a systems engineer.
DSA4564E			
4565	Error	Failed to write output records.	[Meaning]  Failed to write output records.  [Action]  Collect the maintenance information and contact a systems engineer.
DSA4565E			
4566	Error	Agent '%1' is not responding.	[Meaning]  Agent could not respond.  %1: Agent name  [Action]  Collect the maintenance information and contact a systems engineer.
DSA4566E			
4568	Error	Internal error: snmplib cannot parse OID '%1'.	[Meaning]  Failed to parse OID.
DSA4568E			

Event ID	Category	Message	Action
			% 1: OID name [Action] Collect the maintenance information and contact a systems engineer.
4569 DSA4569E	Error	Internal error: snmplib cannot locate the OID tree in MIBs. Variable '%1' is assumed to be scalar.	[Meaning] Failed to find OID. % 1: OID name [Action] Collect the maintenance information and contact a systems engineer.
4570 DSA4570E	Error	TIS does not accept SNMP agent records.	[Meaning] TIS did not accept SNMP agent record. [Action] Collect the maintenance information and contact a systems engineer.
4571 DSA4571E	Error	Variable definition does not exist in local MIB. %1 All variables like '%2' will be ignored.	[Meaning] There were no definitions in the MIB. The definition will be ignored. % 1: Error message %2: OID [Action] Collect the maintenance information and contact a systems engineer.
4750 DSA4750E	Error	SQLPLUS_PARSER: function is called with invalid parameters.	[Meaning] Function is called with invalid parameters. [Action] Collect the maintenance information and contact a systems engineer.
4751 DSA4751E	Error	SQLPLUS_PARSER: the configuration parameter '%1' is not specified or is incorrect.	[Meaning] Parameter was not specified, or is incorrect. % 1: Parameter [Action] Collect the maintenance information and contact a systems engineer.
4752 DSA4752E	Error	SQLPLUS_PARSER: the configuration parameter '%1' is too long.	[Meaning] Parameter is too long. % 1: Parameter [Action] Collect the maintenance information and contact a systems engineer.
4753	Error	SQLPLUS_PARSER: failed to decrypt the password.	[Meaning]

Event ID	Category	Message	Action
DSA4753E			Failed to decode password for Oracle access. [Action] Collect the maintenance information and contact a systems engineer.
4754	Error	SQLPLUS PARSER: not enough memory.	[Meaning] There is insufficient memory. [Action] If system memory has become exhausted, resolve this memory shortage problem. In all other cases, contact a systems engineer.
DSA4754E			
5300	Error	Failed to allocate memory block: out of memory.	[Meaning] Memory allocation failed. [Action] If system memory has become exhausted, resolve this memory shortage problem. In all other cases, contact a systems engineer.
DSA5300E			
5301	Error	Invalid parameter: %1.	[Meaning] Invalid parameter. %1: Parameter [Action] Collect the maintenance information and contact a systems engineer.
DSA5301E			
5302	Error	%1 parameter was not specified.	[Meaning] Parameter was not specified. %1: Parameter name [Action] Collect the maintenance information and contact a systems engineer.
DSA5302E			
5303	Error	Failed to open PDB database: %1.	[Meaning] Failed to open database. %1: Database name [Action] Collect the maintenance information and contact a systems engineer.
DSA5303E			
5304	Error	Failed to read the PDB database configuration from the system_database table.	[Meaning] Failed to read database definition. [Action] Collect the maintenance information and contact a systems engineer.
DSA5304E			
5305	Error	Failed to create PDB database, SQL file execution failed: %1.	[Meaning] Failed to create database. %1: Database name
DSA5305E			

Event ID	Category	Message	Action
			[Action] Collect the maintenance information and contact a systems engineer.
5306 DSA5306E	Error	Internal error: %1.	[Meaning] An internal error occurred. %1: Error code [Action] Collect the maintenance information and contact a systems engineer.
5307 DSA5307E	Error	Table system is invalid in old PDB.	[Meaning] System table is invalid in old PDB. [Action] Collect the maintenance information and contact a systems engineer.
5309 DSA5309E	Error	Failed to execute transaction against the PDB database: %1.	[Meaning] Failed to execute transaction. %1: Database name [Action] Collect the maintenance information and contact a systems engineer.
5450 DSA5450E	Error	Failed to open PDB database '%1': %2.	[Meaning] Failed to open the PDB. %1: Database name %2: Error code [Action] Collect the maintenance information and contact a systems engineer.
5451 DSA5451E	Error	Failed to read the PDB database configuration from the system_database table.	[Meaning] Failed to read the PDB database configuration. [Action] Collect the maintenance information and contact a systems engineer.
5452 DSA5452E	Error	Failed to obtain list of database files to delete.	[Meaning] Failed to obtain list of PDB to delete. [Action] Collect the maintenance information and contact a systems engineer.
5453 DSA5453E	Error	Failed to delete old database file '%1': %2.	[Meaning] Failed to delete PDB. %1: Database name %2: Error code

Event ID	Category	Message	Action
			[Action] Collect the maintenance information and contact a systems engineer.
5454 DSA5454E	Error	Failed to read information about PDB tables from the system_tables table.	[Meaning] Failed to read PDB table information. [Action] Collect the maintenance information and contact a systems engineer.
5455 DSA5455E	Error	Management for table '%1' failed. Wrong data for management type %2. Data: '%3'.	[Meaning] Failed to control the table due to incorrect management type. %1: Table name %2: Management type %3:Data [Action] Collect the maintenance information and contact a systems engineer.
5456 DSA5456E	Error	Management for table '%1' failed. Unknown management type %2.	[Meaning] Failed to control the table due to unknown management type. %1: Table name %2: Management type [Action] Collect the maintenance information and contact a systems engineer.
5457 DSA5457E	Error	Management for table '%1' in database file '%2' failed. Execution of management SQL returned error. Management SQL: '%3'. Error: '%4'. Management type: %5. Management data: '%6'.	[Meaning] Failed to control the table. %1: Table name %2: File name %3: SQL statement %4: Error code %5: Management type %6: Data [Action] Collect the maintenance information and contact a systems engineer.
5458 DSA5458E	Error	Failed to allocate memory block: out of memory.	[Meaning] Failed to allocate the memory block. [Action] If system memory has become exhausted, resolve this memory shortage problem. If not,



Event ID	Category	Message	Action
			collect the maintenance information and contact a systems engineer.
5459	Error	Fatal error: %1	[Meaning]
DSA5459E			Fatal error has occurred. %1 : error message [Action] Collect the maintenance information and contact a system engineer.
5559	Error	Failed to output DSA record '%1', code: %2.	[Meaning]
DSA5559E			Failed to output DSA records. %1: Record name %2: Error code [Action] Collect the maintenance information and contact a systems engineer.
5560	Error	Failed to output DSA records, DsaPutEnd() failed, code: %1.	[Meaning]
DSA5560E			Failed to output DSA records. %1: Error code [Action] Collect the maintenance information and contact a systems engineer.
5561	Error	Failed to read timezone information from 'system' table in old database: %1.	[Meaning]
DSA5561E			Failed to read timezone information from 'system' table. %1: Error message [Action] Collect the maintenance information and contact a systems engineer.
5700	Information	Successfully connected to JMX server '%1'	[Meaning]
DSA5700I			Connected to the JMX server. %1: JMX server URL in JNDI format [Action] No action is necessary.
5726	Warning	Failed to connect to JMXserver %1: %2	[Meaning]
DSA5726W			Failed to connect to the JMX server. %1: JMX server URL in JNDI format %2: Error message [Action] If the JMX server is stopped, start it. Check the value of the following item concerning to Interstage Application Server

Event ID	Category	Message	Action
			<p>(Java EE environment) linking or WebLogic Server Linking in the the collection template (template.dat), which was specified in the collection template (template.dat), is correct.</p> <ul style="list-style-type: none"> <li>- USER</li> <li>- PASSWORD</li> <li>- PORT</li> </ul> <p>If it is wrong, correct it, setup, and then restart Systemwalker SQC DCM service/dcmd process.</p>
5752	Error	Failed to load configuration file %1: %2	<p>[Meaning]</p> <p>Failed to open configuration file</p> <p>%1: file name</p> <p>%2: Error message</p> <p>[Action]</p> <p>In case of that the string of "%2 (error message)" includes "Failed to decrypt password.", check the value of the following item concerning to Interstage Application Server (Java EE environment) linking or WebLogic Server Linking in the the collection template (template.dat), which was specified in the collection template (template.dat), is correct.</p> <ul style="list-style-type: none"> <li>- PASSWORD</li> </ul> <p>If it is wrong, correct it, setup, and then restart Systemwalker SQC DCM service/dcmd process.</p> <p>In other case, collect the maintenance information and contact a systems engineer.</p>
DSA5752			
5753	Error	Failed to connect to JMX server %1: %2	<p>[Meaning]</p> <p>Failed to connect to the JMX server.</p> <p>%1: JMX server URL in JNDI format</p> <p>%2: Error message</p> <p>[Action]</p> <p>Check the value of the following item concerning to Interstage Application Server (Java EE environment) linking or WebLogic Server Linking in the the collection template (template.dat), which was specified in the collection template (template.dat), is correct.</p> <ul style="list-style-type: none"> <li>- USER</li> <li>- PASSWORD</li> <li>- PORT</li> </ul>
DSA5753E			

Event ID	Category	Message	Action
			<p>If it is wrong, correct it, setup, and then restart Systemwalker SQC DCM service/dcmd process.</p> <p>In other case, collect the performance information and contact a system engineer.</p>
5800	Information	PDB database is created successfully	[Meaning]
DSA5800I			<p>PDB database is created successfully.</p> <p>[Action]</p> <p>No need to take a further action.</p>
5826	Error	Failed to access PDB database, will retry each %1 seconds: %2	[Meaning]
DSA5826E			<p>Error has occurred when accessing PDB.</p> <p>%1 : Retry interval (second)</p> <p>%2 : Error message</p> <p>[Action]</p> <p>If the internal retry succeeds, no further action is needed.</p> <p>If the internal retry fails and the message output continues, collect the maintenance information and contact a system engineer.</p>
5827	Error	<p>Failed to execute transaction against the PDB database.</p> <p>Now trying to re-open the database.</p> <p>Error : %1</p>	[Meaning]
DSA5827E			<p>Failed to execute transaction against the PDB database.</p> <p>%1 : Error message</p> <p>[Action]</p> <p>This error message is normally output when the error occurred when the record is written in PDB.</p> <p>If the error message is "database is locked", this error may output when the collection data write competes with contents display read, this will not be a problem if this error does not happen frequently.</p> <p>In other case, collect the performance information and contact a system engineer.</p>
5850	Error	Failed to open SQL file '%1': %2.	[Meaning]
DSA5850E			<p>Failed to open SQL file.</p> <p>%1: File name</p> <p>%2: Error message</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
5851	Error	Failed to read SQL file '%1': %2.	[Meaning]
DSA5851E			<p>Failed to read SQL file.</p> <p>%1: File name</p>

Event ID	Category	Message	Action
			%2: Error message [Action] Collect the maintenance information and contact a systems engineer.
5852	Error	Failed to allocate memory block: out of memory.	[Meaning] Failed to allocate the memory block. [Action] If system memory has become exhausted, resolve this memory shortage problem. If not, collect the maintenance information and contact a systems engineer.
DSA5852E			
5853	Error	Failed to access/create PDB database directory '%1': %2	[Meaning] Failed to access or create PDB database directory. %1 : Directory name %2 : Error message [Action] Collect the maintenance information and contact a system engineer.
DSA5853E			
5854	Error	Failed to open PDB database: %1	[Meaning] Failed to open PDB database. %1 : Database name [Action] Collect the maintenance information and contact a system engineer.
DSA5854E			
5855	Error	Fatal error: %1	[Meaning] Fatal error has occurred. %1 : Error message [Action] Collect the maintenance information and contact a system engineer.
DSA5855E			
5856	Error	Database exception: %1	[Meaning] Database exception has occurred. %1 : Error message [Action] Collect the maintenance information and contact a system engineer.
DSA5856E			
5857	Error	An unsupported database type is specified in the database_type parameter.	[Meaning] An invalid database_type parameter was specified. [Action]
DSA5857E			

Event ID	Category	Message	Action
			Collect the maintenance information and contact a systems engineer.
5858	Error	Exceeded wait timeout for the PDB databaser to be created. %1	[Meaning] PDB creation timed out. %1: Error message [Action] Collect the maintenance information and contact a systems engineer.
DSA5858E			
5859	Error	Failed to read the PDB database configuration from the system_database table	[Meaning] Failed to read the PDB database configuration. [Action] Collect the maintenance information and contact a system engineer.
DSA5859E			
5860	Error	Failed to read the PDB database tables information from the system_tables table	[Meaning] Failed to read the PDB database tables information. [Action] Collect the maintenance information and contact a system engineer.
DSA5860E			
5861	Error	Error processing an input DSA record	[Meaning] Error processing an input DSA record. [Action] Collect the maintenance information and contact a system engineer.
DSA5861E			
5862	Error	Failed to receive an input DSA record	[Meaning] Failed to receive an input DSA record. [Action] Collect the maintenance information and contact a system engineer.
DSA5862E			
5863	Error	Failed to execute transaction against the PDB database: %1	[Meaning] Failed to execute transaction. %1 : Database name [Action] Collect the maintenance information and contact a system engineer.
DSA5863E			
5864	Error	Failed to detach database '%1': %2	[Meaning] Failed to detach PDB database. %1 : Database file name %2 : Error message [Action] Collect the maintenance information and contact a system engineer.
DSA5864E			

Event ID	Category	Message	Action
5865	Error	Failed to execute system register SQL against the PDB database: %1	[Meaning]  Failed to execute system register SQL against the PDB database.  %1 : Error message  [Action]  Collect the maintenance information and contact a system engineer.
DSA5865E			
5866	Error	Failed to attach database '%1': %2	[Meaning]  Failed to attach PDB database file.  %1 : Database file name %2 : Error message  [Action]  Collect the maintenance information and contact a system engineer.
DSA5866E			
5867	Error	System function '%1' failed: %2	[Meaning]  System function failed.  %1 : Function name %2 : Error code  [Action]  Collect the maintenance information and contact a system engineer.
DSA5867E			
6025	Error	Unable to change directory to %1	[Meaning]  Unable to change directory.  %1 : Directory name  [Action]  Collect the maintenance information and contact a system engineer.
DSA6025E			
6050	Error	Cannot start msgmanage. %1 system call failed with the following error:  %2	[Meaning]  Cannot start msgmanage.  %1 : System call name %2 : Error Message  [Action]  Collect the maintenance information and contact a system engineer.
DSA6050E			
6051	Error	Cannot write pid file (%1). Check file permissions.	[Meaning]  Cannot write pid file.  %1 : pid file name  [Action]  Check the permissions of the directory which the file is stored, and add the permission to access.
DSA6051E			

Event ID	Category	Message	Action
			If the problem is not solved by the above action, then collect the maintenance information and contact a system engineer.
6052	Error	Errors in command line arguments. Stopping.	[Meaning]
DSA6052E			Errors in command line arguments. [Action] Collect the maintenance information and contact a system engineer.
6053	Error	Filed to load configuration file '%1': %2	[Meaning]
DSA6053E			Failed to load configuration file. %1 : Configuration file name %2 : Error message [Action] Collect the maintenance information and contact a system engineer.
6054	Error	'%1' variable is not defined.	[Meaning]
DSA6054E			Required parameter is not defined. %1 : Definition name [Action] Collect the maintenance information and contact a system engineer.
6055	Error	Failed to open TIS session. %1	[Meaning]
DSA6055E			Failed to open TIS session. %1 : Error message [Action] Collect the maintenance information and contact a system engineer.
6056	Error	Error processing record with TIS. %1	[Meaning]
DSA6056E			Error processing record with TIS. %1 : Error message [Action] Collect the maintenance information and contact a system engineer.
6101	Error	Monitoring value of Object(%3) is above than upper error level. (Device Name:%2, Detect Value:%5, Threshold Value:%6, Detect Times:%7, Detect Check Times:%8)	[Meaning] Monitoring value of Object is greater than the upper error level. Host name: Resource ID is displayed in %2. [Action] This is a message of threshold monitoring. Take necessary actions depending on the operational environment.
		Monitoring value of Object(%3) is below than lower error level.	[Meaning]

Event ID	Category	Message	Action
		(Device Name:%2, Detect Value:%5, Threshold Value:%6, Detect Times:%7, Detect Check Times:%8)	Monitoring value of Object is lower than the lower error level. Host name: Resource ID is displayed in %2. [Action]  This is a message of threshold monitoring. Take necessary actions depending on the operational environment.
6102	Warning	Monitoring value of Object(%3) is above than upper warning level. (Device Name:%2, Detect Value:%5, Threshold Value:%6, Detect Times:%7, Detect Check Times:%8)	[Meaning]  Monitoring value of Object is greater than the upper warning level. Host name: Resource ID is displayed in %2. [Action]  This is a message of threshold monitoring. Take necessary actions depending on the operational environment.
		Monitoring value of Object(%3) is below than lower warning level. (Device Name:%2, Detect Value:%5, Threshold Value:%6, Detect Times:%7, Detect Check Times:%8)	[Meaning]  Monitoring value of Object is lower than the lower warning level. Host name: Resource ID is displayed in %2. [Action]  This is a message of threshold monitoring. Take necessary actions depending on the operational environment.
6103	Information	Monitoring value of Object(%3) is below than upper error level. (Device Name:%2, Detect Value:%5, Threshold Value:%6, Detect Times:%7, Detect Check Times:%8)	[Meaning]  Monitoring value of Object is lower than the upper error level. Host name: Resource ID is displayed in %2. [Action]  This is a message of threshold monitoring. Take necessary actions depending on the operational environment.
		Monitoring value of Object(%3) is above than lower error level. (Device Name:%2, Detect Value:%5, Threshold Value:%6, Detect Times:%7, Detect Check Times:%8)	[Meaning]  Monitoring value of Object is greater than the lower error level. Host name: Resource ID is displayed in %2. [Action]  This is a message of threshold monitoring. Take necessary actions depending on the operational environment.
		Monitoring value of Object(%3) is below than upper warning level. (Device Name:%2, Detect Value:%5, Threshold Value:%6, Detect Times:%7, Detect Check Times:%8)	[Meaning]  Monitoring value of Object is lower than the upper warning level. Host name: Resource ID is displayed in %2. [Action]



Event ID	Category	Message	Action
			This is a message of threshold monitoring. Take necessary actions depending on the operational environment.
		Monitoring value of Object(%3) is above than lower warning level. (Device Name:%2, Detect Value:%5, Threshold Value:%6, Detect Times:%7, Detect Check Times:%8)	<p>[Meaning]</p> <p>Monitoring value of Object is greater than the lower warning level. Host name: Resource ID is displayed in %2.</p> <p>[Action]</p> <p>This is a message of threshold monitoring. Take necessary actions depending on the operational environment.</p>
6302	Error	Syntax error is found inside definition file.(file='%1', line=%2)	<p>[Meaning]</p> <p>Syntax error is found inside the definition file. %1: File name %2: Line number</p> <p>[Action]</p> <p>Check the definition file at the indicated line and correct any errors. If this message is output when the collection policy is created, recreate the collection policy. If the same message is output after action has been taken, collect the maintenance information and contact a systems engineer.</p>
6303	Warning	subsystem %1 is inactive.	<p>[Meaning]</p> <p>Subsystem is inactive. %1: Subsystem name</p> <p>[Action]</p> <p>Processing continues. Check whether data needs to be collected for inactive subsystem %1. If data needs to be collected, no action is required. Otherwise, delete the specification for subsystem %1 from the "jla.ini" settings file.</p>
6304	Warning	Systemwalker Operation Manager's log can not be recognized. So it is ignored. (log='%1')	<p>[Meaning]</p> <p>Systemwalker Operation Manager's log cannot be recognized, therefore it is ignored. %1: Log file name</p> <p>[Action]</p> <p>Processing continues. If the message is output frequently, collect the maintenance information and contact a systems engineer.</p>
6305	Error	File operation failed so JLA stopped.(detail='%1', errno=%2)	<p>[Meaning]</p> <p>File operation failed so Systemwalker Operation Management linkage function stopped. %1: Details</p>

Event ID	Category	Message	Action
			<p>%2: Error code</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
6306	Error	Language code conversion failed so JLA stopped. (detail='%1', errno=%2)	<p>[Meaning]</p> <p>Language code conversion failed, therefore Systemwalker Operation Management linkage function stopped.</p> <p>%1: Details</p> <p>%2: Error code</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
6307	Error	An error occurred so JLA stopped.(detail='%1', errno=%2)	<p>[Meaning]</p> <p>An error occurred, therefore Systemwalker Operation Management linkage function stopped.</p> <p>%1: Details</p> <p>%2: Error code</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
6350	Error	[service%1] Transaction Log watcher engine stopped, because an error occurred.%2	<p>[Meaning]</p> <p>An error occurred, therefore the transaction Log watcher engine stopped.</p> <p>%1: Service name</p> <p>%2: Error message</p> <p>[Action]</p> <p>Check for any errors in the environment settings or definition files for the transaction log monitoring engine. If there are no errors, collect all of the files in the "log" directory under the variable file storage directory, and contact a systems engineer.</p>
6351	Error	Can not read the transaction log watcher definition file. (line=%1, code=%2)	<p>[Meaning]</p> <p>The transaction log watcher definition file could not be read.</p> <p>%1: Line number</p> <p>%2: Error code</p> <p>[Action]</p> <p>Check whether line %1 of the transaction log definition file contains any of the following errors that appear in the code indicated by %2. (The meaning of each code is as below.)</p>

Event ID	Category	Message	Action
			<p>102: Failed to read a string from a file stream.</p> <p>200: A block name is incorrect.</p> <p>201: An invalid block name has been specified.</p> <p>300: An invalid value has been specified.</p> <p>301: There is an error with a wildcard specification.</p> <p>302: An invalid character has been specified.</p> <p>303: The definition contains too many characters.</p> <p>307: No value has been specified.</p> <p>310: There is an error with the specification format.</p> <p>311: The maximum number of definitions that can be made has been exceeded.</p> <p>312: The value has been specified more than once.</p> <p>400: The parameter name has not been specified correctly.</p> <p>401: An invalid parameter has been specified.</p> <p>402: A required definition statement has not been specified.</p> <p>500: The symbol name is not correct.</p> <p>501: A required token has not been specified.</p> <p>502: The definition statement has not been specified.</p> <p>900: Failed to allocate memory.</p> <p>If there are no errors, collect the maintenance information and contact a systems engineer.</p>
6352	Error	[service% 1] Can not read a log file, '%2'.%3	<p>[Meaning]</p> <p>A transaction log file could not be read.</p> <p>% 1: Service name</p> <p>%2: Log file name</p> <p>%3: Error message</p> <p>[Action]</p> <p>Check for any errors in the settings for the log file specified in the transaction log definition file. If there are no errors, collect the maintenance information and contact a systems engineer.</p>
6353	Error	[service%1] Invalid log form detected in a log file '%2', continuously.%3	<p>[Meaning]</p> <p>Invalid log form detected in transaction log file continuously.</p> <p>% 1:Service name</p>

Event ID	Category	Message	Action
			%2: Log file name %3: Error message [Action] Check for any errors in the settings for the log format specified in the transaction log definition file. If there are no errors, collect the maintenance information and the following data, and contact a systems engineer.
7053	Error	Record processing failed. %1	[Meaning]
DSA7053E			Error processing records. %1: Error message [Action] Collect the maintenance information and contact a systems engineer.
7200	Information	SAF database is created successfully	[Meaning]
DSA7200I			SAF database is created successfully. [Action] No need to take a further action.
7226	Error	Failed to access SAF database, will retry each %1 seconds: %2	[Action]
DSA7226E			Failed to access SAF database. %1 : Retry interval (second) %2 : Error message [Action] If the internal retry succeeds, no further action is needed. If the internal retry fails and the message output continues, collect the maintenance information and contact a system engineer.
7227	Error	Failed to execute transaction against the SAF database. Now trying to re-open the database. Error: %1	[Meaning]
DSA7227E			Failed to execute transaction against the SAF database. %1 : Error Message [Action] If the internal re-open succeeds, no further action is needed. If the internal re-open fails and the message output continues, collect the maintenance information and contact a system engineer.
7228	Error	Failed to obtain forward records from SAF database. Now trying to re-open the database. Error: %1	[Meaning]
DSA7228E			Failed to obtain forward records from SAF database. %1 : Error Message [Action]

Event ID	Category	Message	Action
			<p>If the internal re-open succeeds, no further action is needed.</p> <p>If the internal re-open fails and the message output continues, collect the maintenance information and contact a system engineer.</p>
7250 DSA7250E	Error	Failed to open SQL file '%1': %2	<p>[Meaning]</p> <p>Failed to open SQL file.</p> <p>%1 : File name</p> <p>%2 : Error message</p> <p>[Action]</p> <p>Collect the maintenance information and contact a system engineer.</p>
7251 DSA7251E	Error	Failed to read SQL file '%1': %2	<p>[Meaning]</p> <p>Failed to read SQL file.</p> <p>%1 : File name</p> <p>%2 : Error message</p> <p>[Action]</p> <p>Collect the maintenance information and contact a system engineer.</p>
7252 DSA7252E	Error	An unsupported database type is specified in the database_type parameter.	<p>[Meaning]</p> <p>Error in the specified database_type parameter.</p> <p>[Action]</p> <p>Collect the maintenance information and contact a system engineer.</p>
7253 DSA7253E	Error	Failed to access/create SAF database directory '%1': %2	<p>[Meaning]</p> <p>Failed to access or create SAF database directory.</p> <p>%1 : Directory name</p> <p>%2 : Error message</p> <p>[Action]</p> <p>Collect the maintenance information and contact a system engineer.</p>
7254 DSA7254E	Error	Error processing an input DSA record	<p>[Meaning]</p> <p>Error processing an input DSA record.</p> <p>[Action]</p> <p>Collect the maintenance information and contact a system engineer.</p>
7255 DSA7255E	Error	Failed to receive an input DSA record	<p>[Meaning]</p> <p>Failed to receive an input DSA record.</p> <p>[Action]</p> <p>Collect the maintenance information and contact a system engineer.</p>

Event ID	Category	Message	Action
7256	Error	Failed to allocate memory block: out of memory	[Meaning]  Failed to allocate the memory block.  [Action]  If system memory has become exhausted, resolve this memory shortage problem. If not, collect the maintenance information and contact a systems engineer.
DSA7256E			
7257	Error	Database exception: %1	[Meaning]  Database exception has occurred.  %1 : Error message  [Action]  Collect the maintenance information and contact a system engineer.
DSA7257E			
7258	Error	Fatal error: %1	[Meaning]  Fatal error has occurred.  %1 : error message  [Action]  Collect the maintenance information and contact a system engineer.
DSA7258E			
7259	Error	Failed to execute transaction against the SAF database: %1	[Meaning]  Failed to execute transaction against the SAF database.  %1 : Error Message  [Action]  Collect the maintenance information and contact a system engineer.
DSA7259E			
7260	Error	Failed to load module config file '%1': %2 %3	[Meaning]  Failed to load module config file.  %1 : File name  %2 : Error code  %3 : Error Message  [Action]  Collect the maintenance information and contact a system engineer.
DSA7260E			
7261	Error	Failed to open TIS session. %1	[Meaning]  Failed to open TIS session.  %1 : Error message  [Action]  Collect the maintenance information and contact a system engineer.
DSA7261E			
7262	Error	Failed to obtain forward records from SAF database: %1	[Meaning]

Event ID	Category	Message	Action
DSA7262E			Failed to obtain forward records from SAF database. %1 : Error message [Action] Collect the maintenance information and contact a system engineer.
7263	Error	DSA library function %1 failed. %2	[Meaning] Transaction failed. %1 : Transaction name %2 : Error code [Action] Collect the maintenance information and contact a system engineer.
DSA7263E			
8025		Failed to open the 'bad' file.  Verify that the configuration parameters 'bad_file_dir' and 'bad_file_name' are specified correctly.  'Bad' file logging is disabled.	[Meaning] Failed to open the "bad" file. [Action] Collect the maintenance information and contact a systems engineer.
DSA8025W			
8026	Warning	Failed to obtain server address info for server=%1. SERVER IS IGNORED %2	[Meaning] Failed to acquire an address for the server. %1: Server name %2: Error message [Action] Correct any errors in the host name for the remote server in the connection account configuration file. If there is no error in the host name, specify the host name of the remote server with its IP address.  If the problem is not solved by the above action, collect the maintenance information and contact a systems engineer.
DSA8026W			
8027	Warning	Unable to connect to the server %1. %2.  %3	[Meaning] An attempt to connect to the server has failed. %1: Server name %2: System call %3: Error message [Action]  - Correct any errors in the information for the remote server in the definitions file for the connection account or in the remote monitoring configuration file. Perform setup when the errors are corrected.
DSA8027W			

Event ID	Category	Message	Action
			<p>- If the remote server or service set in the definitions file is stopped, start them.</p> <p>If the problem is not solved by the above action, collect the maintenance information and contact a systems engineer.</p>
8028	Warning	Unable to transmit data to the server %1. %2	<p>[Meaning]</p> <p>Data could not be sent to the server.</p> <p>%1: Server name %2: Error message</p> <p>[Action]</p> <p>If the remote server or service set in the definitions file for the connection account is stopped, start them.</p> <p>In all other cases, collect the maintenance information and contact a systems engineer.</p>
DSA8028W			
8029	Warning	Unable to receive data to the server %1. %2	<p>[Meaning]</p> <p>Data could not be received from the server.</p> <p>%1: Server name %2: Error message</p> <p>[Action]</p> <p>If the remote server or service set in the definitions file for the connection account is stopped, start them.</p> <p>In all other cases, collect the maintenance information and contact a systems engineer.</p>
DSA8029W			
8030	Warning	server %1 disconnects.	<p>[Meaning]</p> <p>Connection with the server was cut.</p> <p>%1: Server name</p> <p>[Action]</p> <ul style="list-style-type: none"> <li>- If the remote server or service set in the definitions file for the connection account is stopped, start them.</li> <li>- Check that the monitored server for agent for Agentless Monitoring management is correctly set.</li> </ul> <p>If the problem is not solved by the above action, collect the maintenance information and contact a systems engineer.</p>
DSA8030W			
8031	Warning	Failed to open file %s.	<p>[Meaning]</p> <p>Could not open file.</p> <p>%s: File name</p> <p>[Action]</p> <p>If the file is open in a text editor or other application, close it.</p>
DSA8031W			



Event ID	Category	Message	Action
			In all other cases, collect the maintenance information and contact a systems engineer.
8032	Warning	Connect error or timeout for server=%1	<p>[Meaning]</p> <p>A server connection error or timeout has occurred.</p> <p>%1: Server name</p> <p>[Action]</p> <ul style="list-style-type: none"> <li>- Correct any errors in the information for the remote server in the definitions file for the connection account or in the remote monitoring configuration file. Perform setup when the errors are corrected.</li> <li>- If the remote server or service set in the definitions file is stopped, start them.</li> </ul> <p>If the problem is not solved by the above action, collect the maintenance information and contact a systems engineer.</p>
DSA8032W			
8033	Warning	%1 SOCKET error: %2	<p>[Meaning]</p> <p>Socket error.</p> <p>%1: System call</p> <p>%2: Error message</p> <p>[Action]</p> <ul style="list-style-type: none"> <li>- Correct any errors in the information for the remote server in the definitions file for the connection account or in the remote monitoring configuration file. Perform setup when the errors are corrected.</li> <li>- If the remote server or service set in the definitions file is stopped, start them.</li> </ul> <p>If the problem is not solved by the above action, collect the maintenance information and contact a systems engineer.</p>
DSA8033W			
8050	Error	command_file parameter is not specified or no commands are specified in the file.	<p>[Meaning]</p> <p>An invalid command_file parameter was specified.</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
DSA8050E			
8051	Error	Error reading from %1.	<p>[Meaning]</p> <p>Read error</p> <p>%1: Parameter</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
DSA8051E			

Event ID	Category	Message	Action
8052	Error	No server parameter(s).	[Meaning]
DSA8052E			Server parameter was not specified. [Action] Collect the maintenance information and contact a systems engineer.
8053	Error	port is not specified in the parameter server=%1 or port is invalid.	[Meaning]
DSA8053E			An invalid port parameter was specified. %1: Server name [Action] Collect the maintenance information and contact a systems engineer.
8054	Error	login is not specified in the parameter server=%1.	[Meaning]
DSA8054E			An invalid login parameter was specified. %1: Server name [Action] Collect the maintenance information and contact a systems engineer.
8055	Error	password is not specified in the parameter server=%1 or password is invalid.	[Meaning]
DSA8055E			An invalid password parameter was specified. %1: Server name [Action] The login password for the remote server may not be set correctly in the remote monitoring configuration file, check it and make any necessary corrections. In all other cases, collect the maintenance information and contact a systems engineer.
8056	Error	Invalid address parameter server=%1.	[Meaning]
DSA8056E			An invalid password parameter was specified. %1: Server name [Action] Collect the maintenance information and contact a systems engineer.
8057	Error	Not enough memory.	[Meaning]
DSA8057E			There is insufficient memory. [Action] If system memory has become exhausted, resolve this memory shortage problem. In all other cases, collect the maintenance information and contact a systems engineer.
8058	Error	Failed to open a TIS session. %1	[Meaning]
DSA8058E			Failed to open TIS session.

Event ID	Category	Message	Action
			% 1: Error message [Action] Collect the maintenance information and contact a systems engineer.
8060 DSA8060E	Error	The configuration parameter '% 1' is incorrect.	[Meaning] Configuration parameter is invalid. % 1: Parameter [Action] Collect the maintenance information and contact a systems engineer.
8061 DSA8061E	Error	% 1 SOCKET error: % 2	[Meaning] Socket error. % 1: System call % 2: Error message [Action] <ul style="list-style-type: none"> <li>- Correct any errors in the information for the remote server in the definitions file for the connection account or in the remote monitoring configuration file. Perform setup when the errors are corrected.</li> <li>- If the remote server or service set in the definitions file is stopped, start them.</li> </ul> If the problem is not solved by the above action, collect the maintenance information and contact a systems engineer.
8062 DSA8062E	Error	Invalid protocol parameter server=% 1.	[Meaning] An invalid protocol parameter was specified. % 1: Server name [Action] Collect the maintenance information and contact a systems engineer.
8063 DSA8063E	Error	Invalid ID parameter server=% 1.	[Meaning] An invalid ID parameter was specified. % 1: Server name [Action] Collect the maintenance information and contact a systems engineer.
8064 DSA8064E	Error	Invalid file name: '% 1'.	[Meaning] An invalid file name was specified. % 1: File name [Action]

Event ID	Category	Message	Action
			Collect the maintenance information and contact a systems engineer.
8065	Error	TIS processing failed.	[Meaning]
DSA8065E		%1 Record: %2	Failed to process TIS. %1: Error code %2: Record [Action] Collect the maintenance information and contact a systems engineer.
8066	Error	Failed to write output records.	[Meaning]
DSA8066E			Failed to write output records. [Action] Collect the maintenance information and contact a systems engineer.
8092	Error	Connect error or timeout for server=%1	[Meaning]
DSA8092E			A connection error or timeout has occurred with the server. %1: Server name [Action] - Correct any errors in the information for the remote server in the definitions file for the connection account or in the remote monitoring configuration file. Perform setup when the errors are corrected. - If the remote server or service set in the definitions file is stopped, start them. If the problem is not solved by the above action, collect the maintenance information and contact a systems engineer.
8150	Error	%1 parameter is not specified or is invalid.	[Meaning]
DSA8150E			Parameter is not specified or the parameter is invalid. %1 : Parameter name [Action] Collect the maintenance information and contact a system engineer.
8151	Error	SOAP error: %1	[Meaning]
DSA8151E		Deatail: %2	This is a SOAP error. %1: Error message %2: Detailed message (output only if there is a detailed message) [Action] Possible causes:

Event ID	Category	Message	Action
			<p>1. There is an error in the user name or password used to connect to the server.</p> <p>2. There is an error in the host name or IP address of the connection target server.</p> <p>3. The user connecting to the server does not have read permission.</p> <p>4. The network cannot connect to the server, or the server is stopped.</p> <p>If Cause 1 or 2 applies, modify the connection account definition file or the remote monitoring definition file, and perform setup again.</p> <p>If Cause 3 applies, at the connection target server, assign read permission for the user.</p> <p>If Cause 4 applies, correct the network connection to the server, or start the connection target server.</p> <p>If the above actions do not resolve the problem, collect the maintenance information and contact a system engineer.</p>
8152	Error	The record %1 was not found in the TIS record definitions.	[Meaning]
DSA8152E			Cannot find the record in the TIS record definitions.
			[Action]
			Collect the maintenance information and contact a system engineer.
8153	Error	<p>A required TIS property is missing.</p> <p>Property name: %1</p> <p>TIS record/field name: %2</p>	[Meaning]
DSA8153E			<p>A required TIS property is missing.</p> <p>%1 : Property name</p> <p>%2 : Record name/Field name</p>
			[Action]
			Collect the maintenance information and contact a system engineer.
8154	Error	No counter fields are defined for the record %1.	[Meaning]
DSA8154E			<p>No counter fields are defined for the record.</p> <p>%1: Record name</p>
			[Action]
			Collect the maintenance information and contact a system engineer.
8155	Error	Invalid property '%1' value '%2' in record/field '%3'.	[Meaning]
DSA8155E			<p>Invalid property value in record/field.</p> <p>%1 : Property name</p> <p>%2 : Property value</p> <p>%3 : Record name/Field name</p>

Event ID	Category	Message	Action
			[Action] Collect the maintenance information and contact a system engineer.
8157 DSA8157E	Error	Not enough memory.	[Meaning] Memory shortage occurred. [Action] If system memory has become exhausted, resolve this memory shortage problem. In all other cases, collect the maintenance information and contact a systems engineer.
8158 DSA8158E	Error	Failed to open a TIS session. %1	[Meaning] Failed to open a TIS session. %1 : Error Message [Action] Collect the maintenance information and contact a system engineer.
8160 DSA8160E	Error	The configuration parameter '%1' is incorrect.	[Meaning] The configuration parameter is incorrect. %1 : Parameter name [Action] Collect the maintenance information and contact a system engineer.
8165 DSA8165E	Error	TIS processing failed. %1 Record: %2	[Meaning] TIS processing failed. %1 : Error Message %2 : Record [Action] Collect the maintenance information and contact a system engineer.
8166 DSA8166E	Error	Failed to write output records.	[Meaning] Failed to write output records. [Action] Collect the maintenance information and contact a system engineer.

## 5.2 Windows-specific Messages

This section explains messages that are specific to Windows.

Event ID	Category	Message	Action
1251	Warning	Failed to start DSA '%1' (%2) %3	[Meaning] Activation of the DSA has failed.

Event ID	Category	Message	Action
			<p>%1: DSA name            %2: Module pass            %3: Error message</p> <p>[Action]</p> <ul style="list-style-type: none"> <li>- When linking to the Interstage Application Server (under Java EE environment) or linking to the WebLogicServer (*)</li> </ul> <p>Check that the path specified to the JAVA_HOME key in template.dat is correct.</p> <p>If it is wrong, correct it, setup, and then restart Systemwalker Service Quality Coordinator DCM service.</p> <p>*)</p> <p>The cases are as follows:</p> <ul style="list-style-type: none"> <li>- DSA name is "ISJMXSNR".</li> <li>- DSA name is the section name of the template.dat for the WebLogicServer linkage.</li> <li>- If the problem is not solved by the above action, collect the maintenance information and contact a systems engineer.</li> </ul>
6000	Information	The scheduler function has been activated.	<p>[Meaning]</p> <p>The scheduler function has been activated.</p> <p>[Action]</p> <p>No action is necessary.</p>
6001	Information	The scheduler function has been stopped.	<p>[Meaning]</p> <p>The scheduler function has been stopped.</p> <p>[Action]</p> <p>No action is necessary.</p>
6002	Information	The scheduler function has been stopped because of a shut-down operation.	<p>[Meaning]</p> <p>The scheduler function has been stopped because of a shut-down operation.</p> <p>[Action]</p> <p>No action is necessary.</p>

Event ID	Category	Message	Action
6060	Error	Service setup processing has failed. Cause code = %1	<p>[Meaning]</p> <p>Service setup processing has failed.</p> <p>%1:Cause code</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
6061	Error	Activation of the schedule function has failed. Cause code = %1	<p>[Meaning]</p> <p>Activation of the schedule function has failed.</p> <p>%1:Cause code</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
6062	Error	An error occurred in stop processing of scheduler function. Cause code = %1	<p>[Meaning]</p> <p>An error occurred in stop processing of scheduler function.</p> <p>%1:Cause code</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
6063	Error	An error occurred during execution of scheduler function. Function name = %1, Cause code = %2	<p>[Meaning]</p> <p>An error occurred during execution of scheduler function.</p> <p>%1:Function name</p> <p>%2:Cause code</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
6064	Error	An error occurred in performance information collection processing. Function name = %1, Cause code = %2	<p>[Meaning]</p> <p>An error occurred in performance information collection processing.</p> <p>%1: Function name</p> <p>%2:Cause code</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>



## 5.3 UNIX-specific Messages

This section explains messages that are specific to Solaris and Linux

Event ID	Category	Message	Action
DSA0543E	Error	Bad data received from command '%1': %2	<p>[Meaning]</p> <p>This message is output when the output results of a command are in an unexpected format.</p> <p>%1: Command name %2: Error message</p> <p>[Action]</p> <p>Take any appropriate action that can be determined from the error message.</p> <p>This message is also output if the middleware to be managed is stopped. To control information collection behavior according to the operation mode of jobs or clusters, refer to "sqcMdPolicy (Temporary Policy Change Command)" and perform a temporary policy change.</p> <p>In cases other than these, collect the maintenance information and contact a systems engineer.</p>
DSA0557W	Warning	Bad data received from command '%1': %2	<p>[Meaning]</p> <p>This message is output when the output results of a command are in an unexpected format.</p> <p>%1: Command name %2: Error message</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
DSA0600E	Error	Scripting error detected at line %1 in script '%2': %3	<p>[Meaning]</p> <p>A TIS scripting error occurred.</p> <p>%1: Line number %2: Script name %3: Error message</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
DSA0601E	Error	Invalid SampleStart record: %1	<p>[Meaning]</p> <p>SampleStart record is not correct.</p> <p>%1: Record</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>

Event ID	Category	Message	Action
DSA0604E	Error	There is no troubleshooting route code for default group %1	<p>[Meaning]</p> <p>Error in troubleshooting definition.</p> <p>%1: Group name</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
6330	Error	Syntax error was found inside definition file.(file=%1, line=%2)	<p>[Meaning]</p> <p>The definition file has syntax errors.</p> <p>%1: File name</p> <p>%2: Line number</p> <p>[Action]</p> <p>Correct the definition file.</p> <p>If no problem is found with the definition file, collect the maintenance information and contact a systems engineer.</p>
6331	Error	Error occurred so stopped. (detail=%1, errno=%2)	<p>[Meaning]</p> <p>An error occurred.</p> <p>%1:Details</p> <p>%2: Error code</p> <p>[Action]</p> <p>Collect the maintenance information and contact a systems engineer.</p>
6332	Warning	Log can not be analyzed so it was ignored. (detail=%1, log=%2)	<p>[Meaning]</p> <p>Failed to analyze log file.</p> <p>%1:Details</p> <p>%2: Log file name</p> <p>[Action]</p> <ul style="list-style-type: none"> <li>- The log format may not be correctly defined in the definition file. Check it and make any necessary corrections.</li> <li>- The Interstage log may be corrupt. Check it and take any necessary actions.</li> </ul> <p>If the problem is not solved by the above action, collect the maintenance information and contact a systems engineer.</p>
6333	Information	Definition file has been changed so it was reloaded.	<p>[Meaning]</p> <p>The definition file is changed so it was reloaded.</p> <p>[Action]</p> <p>No action is necessary.</p>

## 5.4 Error messages generated by FJSVcir

---

### **FSP\_FJSVCIR\_CIRINST: ERROR: 101: CIRINST101: Administrator privilege is required.**

#### Description

The user does not have administrator privileges

#### Action method

Login with administrator privileges and run the command again.

---

### **FSP\_FJSVCIR\_CIRINST: ERROR: 102: CIRINST102: Failed to create %s**

#### Parameters

%s: Directory name

#### Description

Failed to create a directory during the installation.

#### Action method

Creating the directory might have failed for some reason. Run the installer again, or run cirinst command again. If the problem persists, check the system log.

---

### **FSP\_FJSVCIR\_CIRINST: ERROR: 103: CIRINST103: It is required at least %dMB**

#### Parameters

%d: Disk spaces

#### Description

Insufficient disk space (at least 150 MB required).

#### Action method

Confirm that the system has sufficient disk spaces

---

### **[Windows] FSP\_FJSVCIR\_CIRINST: ERROR: 104: CIRINST104: Failed to copy CIR files.**

### **[Linux][Solaris] FSP\_FJSVCIR\_CIRINST: ERROR: 104: CIRINST104: Failed to copy CIR installer files.**

#### Description

Failed to copy files required for the installation.

#### Action method

Copying the files failed for some reason. Run the installer again, or run cirinst command again. If the problem persists, check the system log.

---

### **FSP\_FJSVCIR\_CIRINST: ERROR: 105: CIRINST105: Failed to copy JRE.**

#### Description

Failed to copy JRE required for installation.

#### Action method

Copying the files failed for some reason. Run the installer again, or run cirinst command again. If the problem persists, check the system log.

---

**FSP\_FJSVCIR\_CIRINST: ERROR: 106: CIRINST106: Failed to copy CIR files.****Description**

Failed to copy files during the installation.

**Action method**

Copying the files failed for some reason. Run the installer again, or run cirinst command again. If the problem persists, check the system log.

---

**FSP\_FJSVCIR\_CIRINST: ERROR: 107: CIRINST107: Invalid option.****Description**

An invalid option was specified.

**Action method**

Specify a valid option. [-c]: Command interface

---

**FSP\_FJSVCIR\_CIRINST: ERROR: 108: CIRINST108: JRE which should be deployed is not bundled.****Description**

An appropriate JRE for this system is not bundled.

**Action method**

Confirm that the product supports the platform.

---

**FSP\_FJSVCIR\_CIRINST: ERROR: 109: CIRINST109: Unsupported OS.****Description**

Unsupported operating system.

**Action method**

Confirm that the product supports the operating system.



---

**FSP\_FJSVCIR\_CIRINST: ERROR: 185: CIRINST185: Isb\_release was not found. Please install the package below.  
- redhat-lsb****Description**

Isb\_release command was not found.

**Action method**

Add redhat-lsb package and then execute install again.



---

**FSP\_FJSVCIR\_CIRINST: ERROR: 186: CIRINST186: Isb\_release was not found.****Description**

Isb\_release command was not found.

#### Action method

Add the relevant package and then execute install again.

---

#### **FSP\_FJSVCIR\_CIRINST: ERROR: 201: CIRINST201: Administrator privilege is required.**

#### Description

The user does not have administrator privileges

#### Action method

Login with administrator privileges and run the command again.

---

#### **FSP\_FJSVCIR\_CIRINST: ERROR: 203: CIRINST203: Failed to delete files.**

#### Description

Failed to delete FJSVcir files.

#### Action method

Deleting the files failed for some reason. Run cirremove command again. If the problem persists, check the system log.

---

#### **FSP\_FJSVCIR\_CIRINST: ERROR: 205: CIRINST205: Invalid option.**

#### Description

Invalid option is specified.

#### Action method

No option is supported. Retry without any options.

---

#### **Specified installation parameters file was not found.**

#### Description

Specified installation parameters file was not found. (silent mode)

#### Action method

Specify the installation parameters file.

---

#### **It failed to install. See log for details**

#### Description

An error occurred during install. (silent mode)

#### Action method

Collect the files stored in the following directories.

##### **[UNIX]**

/var/opt/FJSVcir/cir/logs/cirlog0.log.0

##### **[Windows]**

%SystemDrive%\FujitsuF4CR\cir\logs\cirlog0.log.0

%ProgramData%\Fujitsu\FujitsuF4CR\cir\logs\cirlog0.log.0

---

**Parameters are invalid.Please specifiy valid parameters.**

Description

Invalid option is specified. (silent mode)

Action method

Specify a valid option.

---

## **5.5 Error messages generated by Multiple Uninstallation and Management (middleware) function**

---

**It has already been running in another process.**

Description

Multiple Uninstallation and Management (middleware) are executed, or Uninstallation and Management (middleware) is executed while installer is running.

Action method

Close Uninstallation and Management (middleware) which has already be executed, or execute Uninstallation and Management (middleware) after installer has finished.

---

**Specified option is invalid.**

Description

An invalid option was specified.

Action method

Specify valid options and run the command again.

---

**Please enter a valid option.**

Description

An invalid character was entered. Valid characters are y, n, or item numbers.

Action method

Enter a valid character.

---

**Failed to uninstall the following software packages:**

Description

Failed to uninstall the software listed in this message.

Action method

Confirm the information shown after this message and take the appropriate action.

---

**Unable to uninstall the software as it is referred from more than one software.**

Description

Failed to uninstall the software because it is used by other software.

#### Action method

No specific action is required.

---

### Unable to uninstall the software as the software is mandatory.

#### Description

Failed to uninstall the software because it is required by another program.

#### Action method

No specific action is required.

---

### Internal data is broken.

#### Description

Internal data used by this product is corrupt.

#### Action method

Collect the files stored in the following directories and contact Fujitsu technical support:

##### [UNIX]

/var/opt/FJ SVCIR/cir/

/etc/opt/FJ SVCIR/cir/CIR.properties

##### [Windows]

%SystemDrive%\FujitsuF4CR\cir\

%ProgramData%\Fujitsu\FujitsuF4CR\cir\

---

### Unable to uninstall the software you were about to uninstall as the existence of the software is a precondition for the operation of another software.

#### Description

Failed to uninstall the software because it is required by another program.

#### Action method

No specific action is required.

---

### The program terminated abnormally.

#### Description

The program has terminated abnormally

#### Action method

Collect the files stored in the following directories and contact Fujitsu technical support:

##### [UNIX]

/var/opt/FJ SVCIR/cir/

/etc/opt/FJ SVCIR/cir/CIR.properties

##### [Windows]

%SystemDrive%\FujitsuF4CR\cir\

%ProgramData%\Fujitsu\FujitsuF4CR\cir\

---

## An unexpected error has occurred during uninstall.

### Description

An error occurred during uninstall.

### Action method

Collect the files stored in the following directories and contact Fujitsu technical support:

#### [UNIX]

/var/opt/FJSVCIR/cir/

/etc/opt/FJSVCIR/cir/CIR.properties

#### [Windows]

%SystemDrive%\FujitsuF4CR\cir\

%ProgramData%\Fujitsu\FujitsuF4CR\cir\

---

## It failed to uninstall. See log for details.

### Description

An error occurred during uninstall. (silent mode)

### Action method

Collect the files stored in the following directories and contact Fujitsu technical support:

#### [UNIX]

/var/opt/FJSVcir/cir/logs/cirlog0.log.0

#### [Windows]

%SystemDrive%\FujitsuF4CR\cir\logs\cirlog0.log.0

%ProgramData%\Fujitsu\FujitsuF4CR\cir\logs\cirlog0.log.0

---

## [Notice] Need to restart for uninstall completion.

### Description

Uninstallation was completed. (silent mode)

### Action method

Restart the system.